

Ceramic

# Bandpass Filter


**BFCN-5151+**

50Ω

4120 to 6440 MHz

## The Big Deal

- Small size 3.2mm x 1.6mm
- Pass band (4120-6440 MHz)
- High rejection in upper stopband



CASE STYLE: FV1206-7

## Product Overview

The BFCN-5151+ LTCC Band Pass Filter achieves a miniature size and high repeatability of performance. Wrap-around terminations minimize variations in performance due to parasitics. Covering 4120 to 6440 MHz, these units offer excellent rejection over a deep stopband.

## Key Features

Feature	Advantages
Small Size (3.20mm x1.6 mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.
Rejection peaks close to pass band	Provides good rejection of signals close to the pass band, for improved system performance.
Deep stopband	Upper stopband features transmission zeroes for high rejection.
LTCC construction	Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes.

Ceramic

# Bandpass Filter

50Ω

4120 to 6440 MHz

**BFCN-5151+**

## Features

- Small size
- Temperature stable
- Hermetically sealed
- LTCC construction

## Applications

- Harmonic Rejection
- Transmitters / Receivers



Generic photo used for illustration purposes only

CASE STYLE: FV1206-7


**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


## Maximum Ratings

Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input	1W max.

Permanent damage may occur if any of these limits are exceeded.




Bottom View



## Pad Connections

Input	1
Output	3
Ground	2

## Functional Schematic



## Electrical Specifications<sup>1,2</sup> at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	5151	—	MHz
	Insertion Loss	F1-F2	—	1.2	3.0	dB
	Return Loss	F1-F2	—	14	—	dB
Stop Band, Lower	Insertion Loss	DC-F3	20	24	—	dB
Stop Band, Upper	Insertion Loss	F4-F5	20	32	—	dB
		F5-F6	15	25	—	





1. Measured on Mini-Circuits Characterization Test Board TB-812+.

2. This filter is not intended for use as a DC Blocking circuit element. In Application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.

## Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
600	54.74	0.06
1600	31.21	0.20
2400	24.66	0.30
3200	36.16	0.59
3600	7.33	3.18
4000	1.31	15.96
5500	1.00	13.33
6750	1.26	17.18
7250	4.49	4.26
8000	18.44	0.72
9000	38.80	0.48
10000	43.91	0.39
11000	25.41	0.58
13000	32.80	0.36
15000	35.07	0.71


## Specification Definition

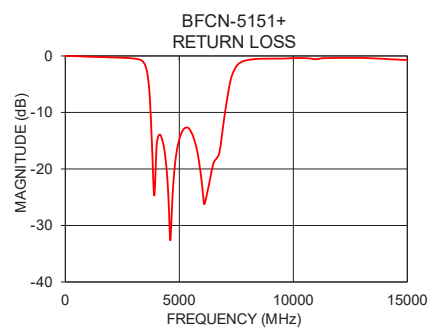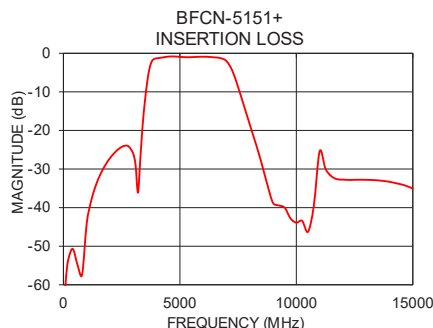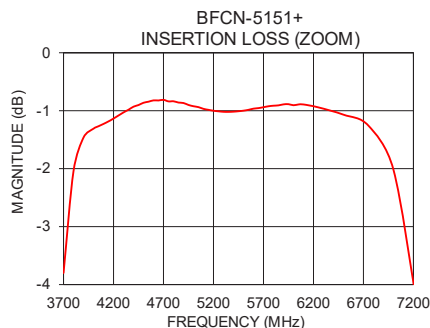


# Bandpass Filter

# BFCN-5151+

## Outline Drawing

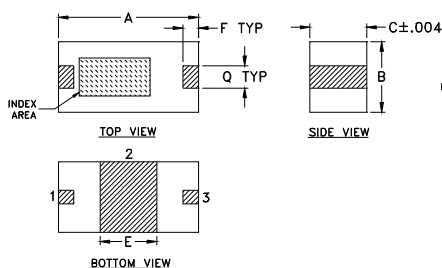

## PCB Land Pattern



Product Marking: N/A


## Pad Connections

Input	1
Output	3
Ground	2

## Outline Dimensions (inch/mm)

A	B	C	E	F	G	H
.126	.063	.051	.051	.014	.183	.104
3.20	1.60	1.30	1.30	0.36	4.65	2.64
J	M	N	P	Q	R	wt
.051	.063	.014	.024	.020	.039	grams
1.30	1.60	0.36	0.61	0.51	0.99	.020

Demo Board MCL P/N: TB-812+  
Suggested PCB Layout (PL-439)

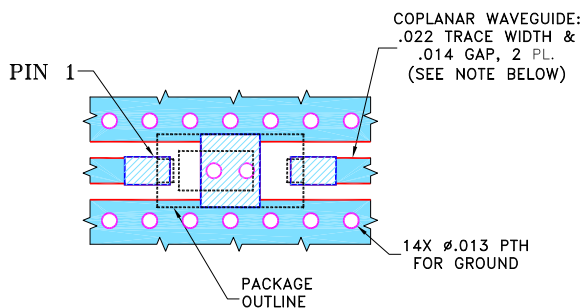

## NOTES:

1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"  $\pm$  .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

## Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)







FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
10	73.39	0.01
100	59.01	0.00
200	53.69	0.01
400	50.68	0.03
600	54.74	0.06
800	57.44	0.10
1000	44.06	0.13
1400	34.09	0.18
1600	31.21	0.20
2000	27.17	0.26
2600	24.02	0.34
3000	26.07	0.45
3100	29.07	0.51
3200	36.16	0.59
3300	27.46	0.72
3400	18.68	1.00
3500	12.36	1.62
3600	7.33	3.18
3700	3.80	6.96
3800	2.04	15.76
3900	1.46	24.71
4000	1.31	15.96
4100	1.23	14.02
4146	1.19	13.92
4200	1.14	14.20
4300	1.03	15.60
4400	0.93	18.38
4500	0.86	23.45
4600	0.82	32.64
4700	0.81	24.93
4800	0.84	19.54
4850	0.86	17.82
4900	0.87	16.55
5000	0.92	14.73
5100	0.97	13.60
5200	1.00	12.89
5250	1.01	12.75
5300	1.02	12.69
5350	1.02	12.67
5400	1.02	12.76
5450	1.01	13.00
5500	1.00	13.33
5550	0.98	13.71
5600	0.96	14.17
5650	0.96	14.77
5700	0.94	15.48
5750	0.92	16.24
5800	0.91	17.16
5900	0.89	19.76
6000	0.91	22.94
6100	0.89	26.22
6250	0.94	23.74
6500	1.07	18.98
7000	2.02	10.12
7500	8.78	1.85
8000	18.44	0.72
8292	24.06	0.57
8500	28.32	0.51
8750	33.94	0.49
9000	38.80	0.48
9500	40.02	0.47
10000	43.91	0.39
10250	43.42	0.38
10500	46.26	0.38
10750	39.52	0.46
11000	25.41	0.58
11500	31.84	0.39
12000	32.74	0.35
12500	32.79	0.35
13000	32.80	0.36
13500	32.94	0.42
14000	33.31	0.52
14500	33.97	0.63
15000	35.07	0.71

# Ceramic Bandpass Filter

**BFCN-5151+**

## Typical Performance Curves

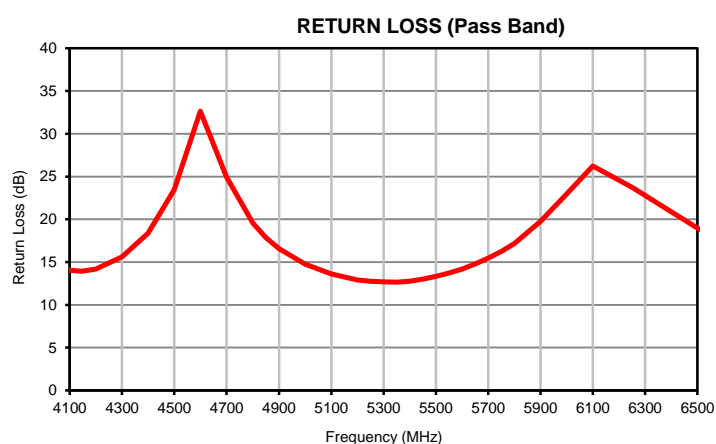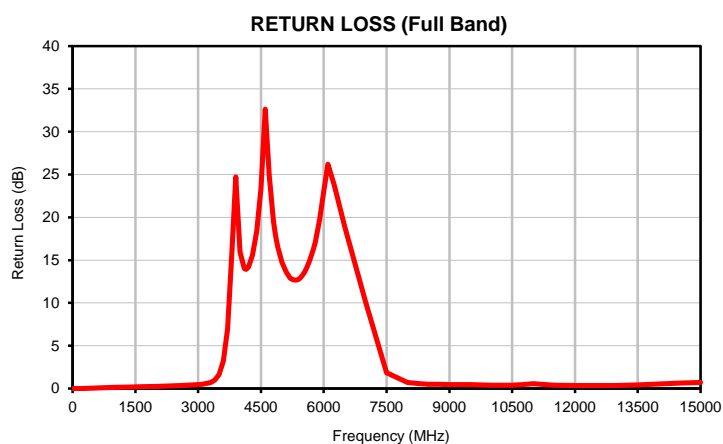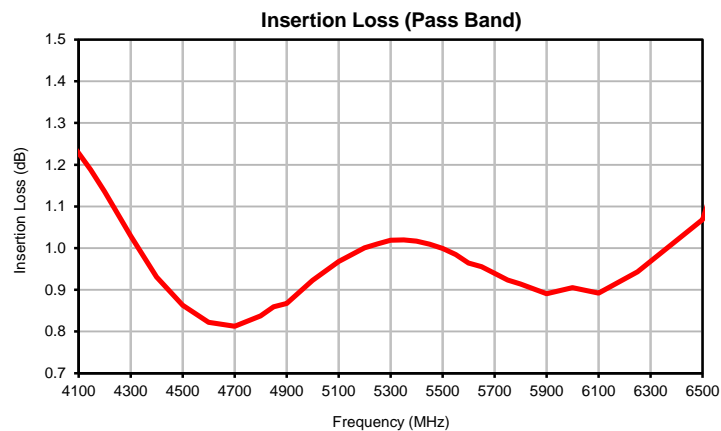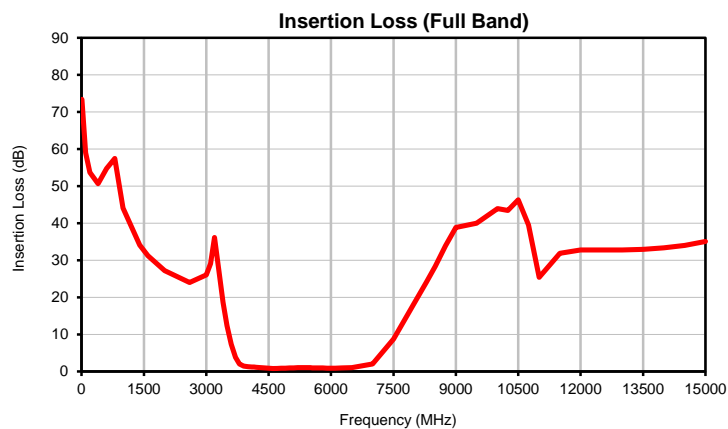

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site  
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)




IF/RF MICROWAVE COMPONENTS




REV. OR  
BFCN-5151+  
5/5/2020  
Page 1 of 1

### Outline Dimensions

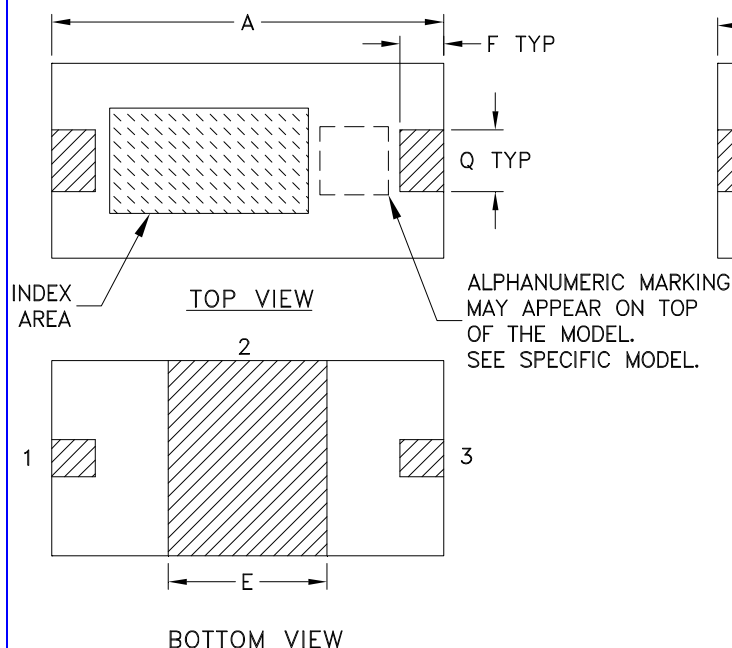

### PCB Land Pattern

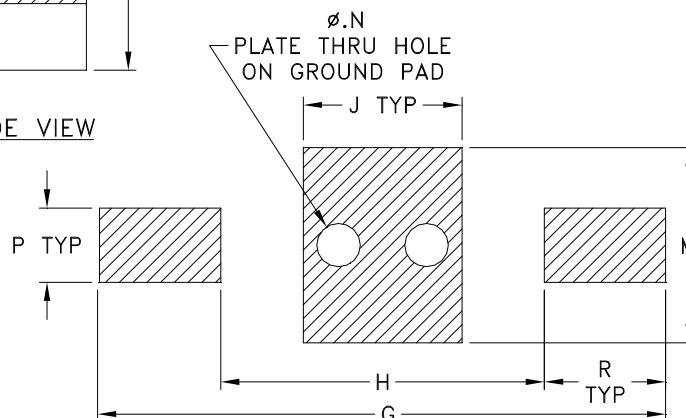

Suggested Layout,  
Tolerance to be within  $\pm.002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
FV1206-7	.126 (3.20)	.063 (1.60)	.051 (1.30)	-- --	.051 (1.30)	.014 (0.35)	.183 (4.65)	.104 (2.65)	.051 (1.30)	-- --	-- --	.063 (1.60)

CASE #	N	P	Q	R	S	WT. GRAM
FV1206-7	.014 (0.35)	.024 (0.60)	.020 (0.50)	.039 (1.00)	-- --	.020

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01$ ; 3 Pl.  $\pm .005$

### Notes:

- Open style, ceramic base.
- Termination finish: **as shown below or indicated on Data Sheet.**  
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.  
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.
- Line width should be designed to match 50 $\Omega$  characteristic impedance, depending on PCB material and thickness.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

## DEVICE ORIENTATION IN T&R

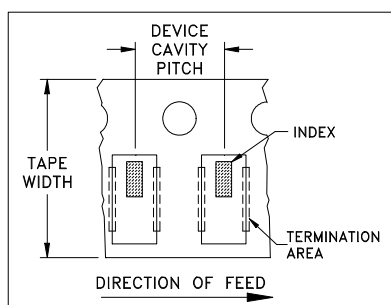


ILLUSTRATION 1

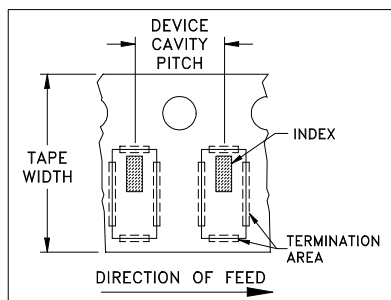


ILLUSTRATION 2

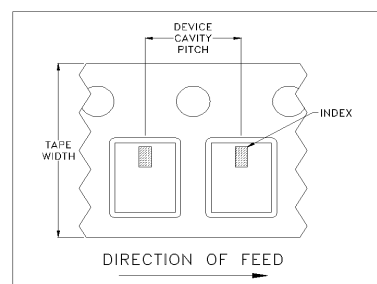


ILLUSTRATION 3

### Applicable Case Styles

FV1206-1  
FV1206-3

### Applicable Case Styles

FV1206-4  
FV1206-5  
FV1206-6  
FV1206-7  
FV1206-9

### Applicable Case Styles

FV1206-11  
FV1206-12  
GE0805C-18  
NL1008C-6  
NL1008C-7  
NL1008C-9  
NL1008C-10  
NL1008C-12

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	3000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




**Distribution Centers NORTH AMERICA** 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • **EUROPE** 44-1252-832600 • Fax 44-1252-837010  
Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

## THIRD ANGLE PROJECTION




## REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M148536	NEW RELEASE	10/14/14	GF	MY

SUGGESTED MOUNTING CONFIGURATION  
FOR FV1206-7 CASE STYLE, "03FL02" PIN CODE

COPLANAR WAVEGUIDE:  
 .022 TRACE WIDTH &  
 .014 GAP, 2 PL.  
 (SEE NOTE BELOW)

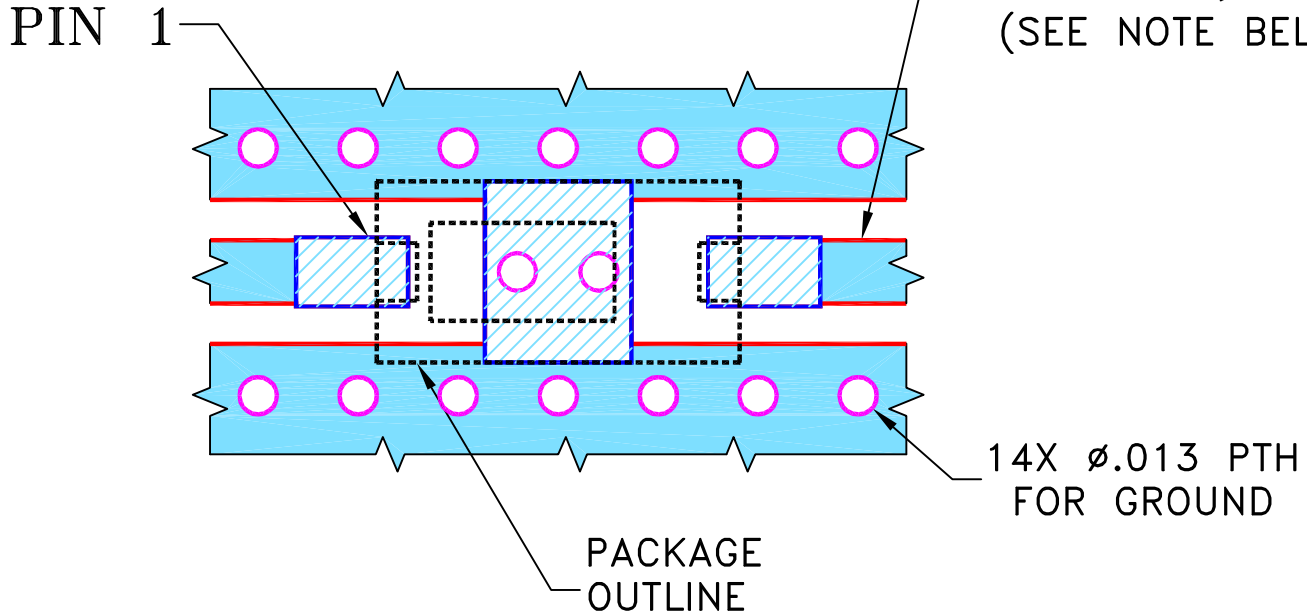NOTES:

1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010"  $\pm$  .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

## UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:  
 2 PL DECIMALS  $\pm$   
 3 PL DECIMALS  $\pm$  .005  
 ANGLES  $\pm$   
 FRACTIONS  $\pm$

## INITIALS

DRAWN

GF

## DATE

10/07/14

CHECKED

AV

10/14/14

APPROVED

MY

10/14/14



Mini-Circuits®

13 Neptune Avenue  
 Brooklyn NY 11235

PL, 03FL02, FV1206-7, TB-812+

SIZE  
 A

CODE IDENT  
 15542

DRAWING NO:

98-PL-439

REV:

OR


FILE: 98PL439

SCALE:

15:1

SHEET:

1 OF 1




THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


ASHEETA1.DWG REV:A DATE:01/12/95



# Evaluation Board and Circuit

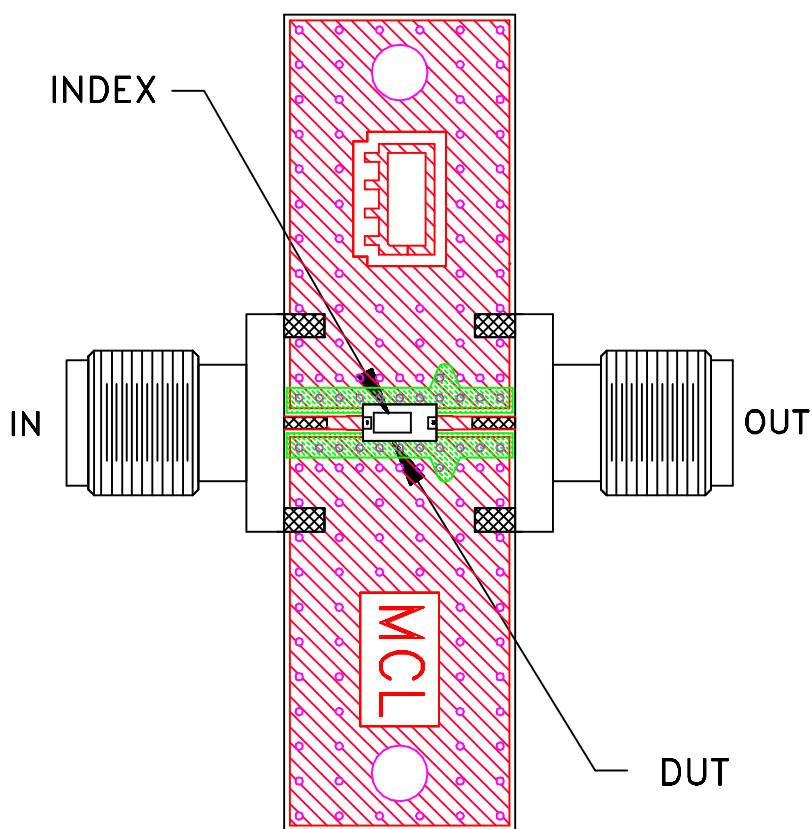


TB-812+

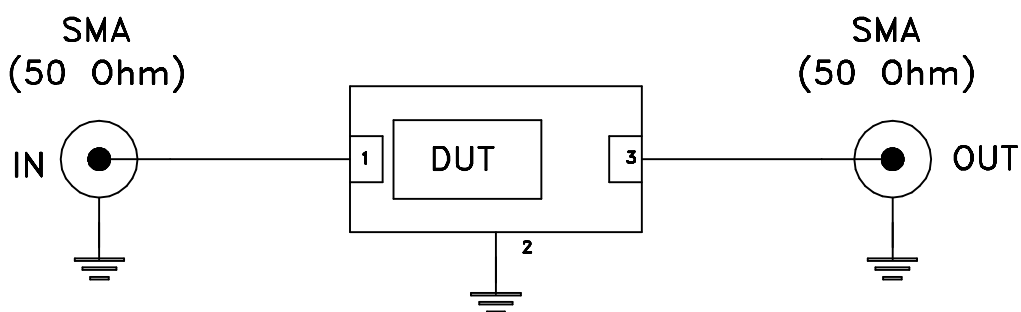

Schematic Diagram

## Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.010 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A