

## Non-Catalog Model

# Frequency Mixer

# JYM-20H

Level 17 (LO Power +17 dBm)

### Important Note

This is a non-catalog model and can be manufactured on specific request. Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

**CASE STYLE : BJ293**


ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	2		2000	MHz
	RF (fL to fU)	2		2000	MHz
	IF	4		700	MHz
Conversion Loss	mid band		5.7	8.5	dB
	Total Range			9.0	dB
LO-RF Isolation	Low Range	30	40		dB
	Mid Range	28	44		dB
	Upper Range	25	40		dB
LO-IF Isolation	Low Range	35	40		dB
	Mid Range	22	40		dB
	Upper Range	15	29		dB
IP3 Input		+27.5	+30		dBm
1 dB Comp. Input Power			+10		dBm

Notes: Low Range = [fL to 10fL]      Mid Range = [10fL to fU/2]      Upper Range = [fU/2 to fU]  
 mid band = [2fL to fU/2]

IP3 : RF Power = 0 dBm @ 200 MHz & 202 MHz , LO Power = +17 dBm @ 180 MHz

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA

### Electrical Schematics

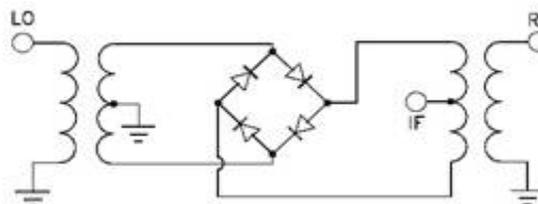

PIN CONNECTIONS	
LO	5
RF	1
IF	7
GROUND	2, 3, 4, 6, 8

# Frequency Mixer

# JYM-20H

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+10dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		+14	+17	+20			+14	+17	+20			+14	+17	+20
2.0	32.0	6.04	5.76	5.71	10.1	40.1	28.69	27.54	28.14	10.1	40.1	0.68	0.46	0.31
4.0	34.0	5.89	5.71	5.58	90.3	120.3	25.70	23.24	24.61	90.3	120.3	0.57	0.38	0.25
10.9	40.9	5.86	5.68	5.55	170.6	200.6	21.28	23.32	25.41	170.6	200.6	0.56	0.38	0.26
90.3	120.3	5.68	5.50	5.42	250.8	280.8	21.84	23.57	28.95	250.8	280.8	0.59	0.43	0.30
170.6	200.6	5.81	5.61	5.50	331.0	361.0	22.52	26.21	36.42	331.0	361.0	0.70	0.53	0.39
250.8	280.8	5.88	5.65	5.53	411.3	441.3	24.31	31.99	30.96	411.3	441.3	0.78	0.59	0.43
331.0	361.0	5.88	5.65	5.55	491.5	521.5	25.69	32.45	27.13	491.5	521.5	0.85	0.65	0.48
491.5	521.5	5.97	5.72	5.61	571.8	601.8	34.77	26.64	26.04	571.8	601.8	0.93	0.67	0.50
571.8	601.8	6.01	5.80	5.69	652.0	682.0	32.71	25.39	24.85	652.0	682.0	0.94	0.70	0.51
652.0	682.0	6.04	5.84	5.74	732.2	762.2	26.20	24.38	24.48	732.2	762.2	0.95	0.72	0.53
732.2	762.2	6.11	5.91	5.80	812.5	842.5	24.81	25.22	25.41	812.5	842.5	0.91	0.71	0.54
812.5	842.5	6.22	6.00	5.89	892.7	922.7	23.31	23.71	24.37	892.7	922.7	0.91	0.69	0.55
892.7	922.7	6.34	6.14	6.02	972.9	1002.9	22.08	22.89	23.89	972.9	1002.9	0.79	0.63	0.51
972.9	1002.9	6.46	6.28	6.16	1053.2	1083.2	21.38	22.05	23.16	1053.2	1083.2	0.67	0.52	0.42
1053.2	1083.2	6.49	6.34	6.25	1133.4	1163.4	20.67	21.94	22.85	1133.4	1163.4	0.61	0.49	0.42
1133.4	1163.4	6.44	6.31	6.24	1233.7	1263.7	21.46	22.07	23.05	1233.7	1263.7	0.51	0.42	0.38
1233.7	1263.7	6.42	6.29	6.22	1313.9	1343.9	21.81	22.63	22.79	1313.9	1343.9	0.44	0.35	0.33
1313.9	1343.9	6.40	6.29	6.24	1414.2	1444.2	21.57	22.18	23.24	1414.2	1444.2	0.36	0.29	0.27
1414.2	1444.2	6.48	6.35	6.30	1494.5	1524.5	22.43	23.30	24.01	1494.5	1524.5	0.33	0.25	0.25
1494.5	1524.5	6.51	6.37	6.32	1594.8	1624.8	22.31	23.73	24.28	1594.8	1624.8	0.33	0.25	0.25
1594.8	1624.8	6.53	6.43	6.38	1675.0	1705.0	23.44	23.46	24.02	1675.0	1705.0	0.32	0.22	0.22
1675.0	1705.0	6.59	6.49	6.46	1775.3	1805.3	24.59	24.87	25.35	1775.3	1805.3	0.29	0.20	0.18
1775.3	1805.3	6.71	6.57	6.53	1855.5	1885.5	24.51	24.07	25.07	1855.5	1885.5	0.30	0.19	0.17
1855.5	1885.5	6.83	6.67	6.61	1955.8	1985.8	24.96	24.50	24.13	1955.8	1985.8	0.35	0.25	0.22
1955.8	1985.8	6.95	6.75	6.67	2036.1	2066.1	24.51	24.82	25.01	2036.1	2066.1	0.39	0.29	0.27
2036.1	2066.1	7.11	6.90	6.79	2136.4	2166.4	24.20	25.61	27.12	2136.4	2166.4	0.40	0.32	0.31
2136.4	2166.4	7.30	7.08	6.96	2216.6	2246.6	23.93	23.57	23.92	2216.6	2246.6	0.42	0.31	0.31
2216.6	2246.6	7.46	7.24	7.10	2316.9	2346.9	22.17	22.25	22.33	2316.9	2346.9	0.49	0.36	0.34
2316.9	2346.9	7.58	7.35	7.23	2397.1	2427.1	21.68	22.29	22.80	2397.1	2427.1	0.58	0.42	0.38
2397.1	2427.1	7.69	7.43	7.30	2497.4	2527.4	20.78	21.63	22.30	2497.4	2527.4	0.60	0.46	0.41
2497.4	2527.4	7.82	7.54	7.39	2577.7	2607.7	19.39	20.90	21.86	2577.7	2607.7	0.68	0.50	0.45
2577.7	2607.7	7.92	7.64	7.48	2678.0	2708.0	18.39	19.62	20.63	2678.0	2708.0	0.75	0.58	0.52
2678.0	2708.0	7.95	7.68	7.52	2758.2	2788.2	17.76	18.71	19.74	2758.2	2788.2	0.87	0.66	0.60
2758.2	2788.2	8.15	7.86	7.72	2858.5	2888.5	16.88	17.83	18.74	2858.5	2888.5	0.89	0.65	0.59
2858.5	2888.5	8.34	8.06	7.93	2938.7	2968.7	16.66	17.65	18.58	2938.7	2968.7	0.90	0.66	0.57
2938.7	2968.7	8.69	8.42	8.26	3039.0	3069.0	16.95	18.14	19.45	3039.0	3069.0	0.88	0.63	0.54
3039.0	3069.0	9.07	8.77	8.60	3119.3	3149.3	17.36	18.70	20.03	3119.3	3149.3	0.78	0.54	0.46
3119.3	3149.3	9.57	9.25	9.06	3219.6	3249.6	17.51	18.77	20.03	3219.6	3249.6	0.69	0.44	0.38
3219.6	3249.6	10.11	9.78	9.56	3299.8	3329.8	17.98	19.39	20.42	3299.8	3329.8	0.63	0.36	0.30
3299.8	3329.8	10.70	10.37	10.13	3400.1	3430.1	18.84	20.14	20.86	3400.1	3430.1	0.57	0.28	0.22



# Frequency Mixer

# JYM-20H

## Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1000.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2000.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+17			+17			+17
700.0	300.1	6.62	10.0	20.1	5.34	700.0	1300.1	6.99
682.3	317.8	6.61	27.7	37.8	5.26	682.3	1317.8	6.99
664.6	335.5	6.59	45.4	55.5	5.29	664.6	1335.5	7.01
646.9	353.2	6.62	63.1	73.2	5.31	646.9	1353.2	7.00
629.2	370.9	6.59	80.8	90.9	5.37	629.2	1370.9	7.00
611.5	388.6	6.55	98.5	108.6	5.30	611.5	1388.6	6.97
593.8	406.3	6.50	116.2	126.3	5.31	593.8	1406.3	6.99
576.2	423.9	6.50	133.8	143.9	5.26	576.2	1423.9	7.00
558.5	441.6	6.48	151.5	161.6	5.31	558.5	1441.6	6.99
540.8	459.3	6.51	169.2	179.3	5.29	540.8	1459.3	6.98
523.1	477.0	6.48	186.9	197.0	5.32	523.1	1477.0	6.98
505.4	494.7	6.46	204.6	214.7	5.28	505.4	1494.7	6.97
487.7	512.4	6.42	222.3	232.4	5.29	487.7	1512.4	6.98
470.0	530.1	6.40	240.0	250.1	5.27	470.0	1530.1	6.99
452.3	547.8	6.41	257.7	267.8	5.31	452.3	1547.8	6.97
434.6	565.5	6.39	275.4	285.5	5.28	434.6	1565.5	6.96
416.9	583.2	6.37	293.1	303.2	5.30	416.9	1583.2	6.95
399.2	600.9	6.31	310.8	320.9	5.28	399.2	1600.9	6.95
381.5	618.6	6.32	328.5	338.6	5.31	381.5	1618.6	6.92
363.8	636.3	6.29	346.2	356.3	5.28	363.8	1636.3	6.91
346.2	653.9	6.34	363.8	373.9	5.30	346.2	1653.9	6.90
328.5	671.6	6.32	381.5	391.6	5.28	328.5	1671.6	6.90
310.8	689.3	6.34	399.2	409.3	5.30	310.8	1689.3	6.87
293.1	707.0	6.29	416.9	427.0	5.29	293.1	1707.0	6.90
275.4	724.7	6.33	434.6	444.7	5.32	275.4	1724.7	6.89
257.7	742.4	6.29	452.3	462.4	5.32	257.7	1742.4	6.90
240.0	760.1	6.33	470.0	480.1	5.31	240.0	1760.1	6.89
222.3	777.8	6.30	487.7	497.8	5.32	222.3	1777.8	6.90
204.6	795.5	6.34	505.4	515.5	5.31	204.6	1795.5	6.87
186.9	813.2	6.30	523.1	533.2	5.34	186.9	1813.2	6.88
169.2	830.9	6.35	540.8	550.9	5.35	169.2	1830.9	6.86
151.5	848.6	6.32	558.5	568.6	5.38	151.5	1848.6	6.85
133.8	866.3	6.35	576.2	586.3	5.37	133.8	1866.3	6.82
116.2	883.9	6.30	593.8	603.9	5.39	116.2	1883.9	6.83
98.5	901.6	6.33	611.5	621.6	5.37	98.5	1901.6	6.82
80.8	919.3	6.28	629.2	639.3	5.43	80.8	1919.3	6.81
63.1	937.0	6.32	646.9	657.0	5.42	63.1	1937.0	6.79
45.4	954.7	6.29	664.6	674.7	5.46	45.4	1954.7	6.80
27.7	972.4	6.34	682.3	692.4	5.44	27.7	1972.4	6.79
10.0	990.1	6.40	700.0	710.1	5.48	10.0	1990.1	6.85

REV. X2  
JYM-20H  
100817  
Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



# Frequency Mixer

# JYM-20H

## Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+14	+17	+20	+14	+17	+20
2.0	36.48	39.54	42.11	40.00	42.16	43.85
4.0	39.05	41.85	44.78	43.65	45.90	47.47
10.9	40.60	43.45	46.14	45.97	48.50	49.80
90.3	41.60	44.13	46.41	46.11	48.80	50.79
170.6	41.95	44.47	46.63	46.50	48.72	49.91
250.8	42.55	45.33	47.70	47.30	49.05	48.81
331.0	43.16	46.07	48.43	46.82	47.39	46.17
491.5	45.08	48.90	51.77	44.65	42.52	40.69
571.8	47.49	52.53	56.66	42.79	40.22	38.32
652.0	49.57	55.90	65.98	40.71	38.00	36.30
732.2	52.54	58.90	58.74	38.54	36.18	34.42
812.5	56.75	56.13	52.59	36.61	34.60	33.05
892.7	57.57	51.11	48.48	34.64	32.49	31.28
972.9	54.28	47.60	45.06	33.47	31.39	30.08
1053.2	52.72	46.34	43.75	32.25	30.29	29.12
1133.4	51.67	45.92	43.32	31.31	29.53	28.38
1233.7	52.07	45.62	42.82	30.74	29.08	27.92
1313.9	52.90	45.62	42.74	30.51	29.00	27.70
1414.2	51.10	45.43	42.98	29.72	28.33	27.35
1494.5	49.90	45.52	43.39	29.23	28.30	27.45
1594.8	49.07	45.28	43.21	28.45	27.78	27.14
1675.0	49.23	45.82	43.84	27.76	27.21	26.74
1775.3	48.45	46.91	45.20	26.95	26.40	25.93
1855.5	47.78	47.35	46.32	26.42	25.79	25.43
1955.8	46.89	50.13	50.06	26.03	25.66	25.15
2036.1	45.32	49.95	53.16	25.57	25.51	25.25
2136.4	42.21	44.73	46.37	25.18	25.17	25.25
2216.6	39.36	41.15	42.54	24.81	25.07	25.14
2397.1	35.86	38.00	39.78	24.70	25.12	25.44
2497.4	34.49	36.43	38.11	24.75	25.24	25.65
2577.7	33.86	35.75	37.24	24.82	25.34	25.68
2678.0	32.62	34.47	35.85	24.64	25.39	25.76
2758.2	31.90	33.68	34.93	24.65	25.48	25.86
2858.5	31.13	32.81	34.09	24.55	25.49	26.20
2938.7	30.36	32.07	33.56	24.47	25.52	26.42
3039.0	29.67	31.40	32.87	24.34	25.66	26.61
3119.3	29.45	31.34	32.98	24.10	25.51	26.63
3219.6	29.44	31.57	33.49	23.84	25.22	26.30
3299.8	30.04	32.45	34.57	23.62	25.08	26.10
3400.1	31.32	33.97	36.38	23.11	24.55	25.62

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	33.82	33.92	34.58
90.3	120.3	34.32	34.70	35.55
170.6	200.6	34.87	35.39	36.23
250.8	280.8	36.23	37.21	38.20
331.0	361.0	37.88	39.20	40.88
411.3	441.3	38.68	40.11	41.93
491.5	521.5	39.82	40.66	41.63
571.8	601.8	40.72	41.83	43.50
652.0	682.0	40.73	42.29	44.87
732.2	762.2	42.09	44.23	47.55
812.5	842.5	41.47	42.14	43.93
892.7	922.7	40.83	40.94	42.03
972.9	1002.9	40.79	41.32	41.92
1053.2	1083.2	40.31	40.94	41.66
1133.4	1163.4	40.51	40.71	41.23
1233.7	1263.7	40.75	40.46	40.55
1313.9	1343.9	40.11	40.18	40.18
1414.2	1444.2	39.63	39.55	39.36
1494.5	1524.5	40.01	39.84	39.82
1594.8	1624.8	42.99	43.24	44.24
1675.0	1705.0	44.90	46.26	48.05
1775.3	1805.3	40.80	40.57	40.67
1855.5	1885.5	36.52	36.60	36.67
1955.8	1985.8	34.01	34.08	33.89
2036.1	2066.1	32.54	32.55	32.49
2136.4	2166.4	30.66	30.78	30.81
2216.6	2246.6	29.89	29.99	30.16
2316.9	2346.9	29.81	29.73	29.90
2397.1	2427.1	29.78	29.64	29.76
2497.4	2527.4	29.77	29.72	29.85
2577.7	2607.7	29.58	29.48	29.67
2678.0	2708.0	29.46	29.32	29.40
2758.2	2788.2	29.67	29.67	29.63
2858.5	2888.5	29.80	30.48	30.78
2938.7	2968.7	29.87	31.13	32.53
3039.0	3069.0	30.21	32.08	35.03
3119.3	3149.3	30.52	32.74	36.33
3219.6	3249.6	31.81	34.04	38.06
3299.8	3329.8	32.78	35.41	39.73
3400.1	3430.1	33.01	36.02	40.11

# Frequency Mixer

# JYM-20H

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+14	+17	+20
2.0	32.0	1.48	1.37	1.29
4.0	34.0	1.49	1.37	1.29
10.9	40.9	1.49	1.37	1.28
90.3	120.3	1.19	1.09	1.03
170.6	200.6	1.20	1.11	1.06
250.8	280.8	1.23	1.15	1.11
331.0	361.0	1.29	1.22	1.18
411.3	441.3	1.36	1.29	1.25
491.5	521.5	1.47	1.40	1.35
571.8	601.8	1.58	1.51	1.46
652.0	682.0	1.69	1.62	1.57
732.2	762.2	1.83	1.74	1.68
812.5	842.5	1.93	1.84	1.77
892.7	922.7	2.02	1.94	1.88
972.9	1002.9	2.10	2.03	1.97
1053.2	1083.2	2.12	2.05	2.00
1133.4	1163.4	2.11	2.04	1.99
1233.7	1263.7	2.07	1.99	1.93
1313.9	1343.9	2.02	1.94	1.88
1414.2	1444.2	1.96	1.86	1.80
1494.5	1524.5	1.89	1.79	1.73
1594.8	1624.8	1.81	1.71	1.64
1675.0	1705.0	1.77	1.66	1.59
1775.3	1805.3	1.74	1.63	1.55
1855.5	1885.5	1.77	1.64	1.56
1955.8	1985.8	1.83	1.70	1.61
2036.1	2066.1	1.87	1.76	1.67
2136.4	2166.4	1.90	1.80	1.72
2216.6	2246.6	1.94	1.83	1.74
2316.9	2346.9	1.97	1.86	1.76
2397.1	2427.1	1.99	1.88	1.79
2497.4	2527.4	1.97	1.87	1.81
2577.7	2607.7	1.94	1.84	1.77
2678.0	2708.0	1.88	1.79	1.72
2758.2	2788.2	1.80	1.72	1.68
2858.5	2888.5	1.71	1.67	1.65
2938.7	2968.7	1.65	1.66	1.68
3039.0	3069.0	1.67	1.72	1.78
3119.3	3149.3	1.76	1.83	1.90
3219.6	3249.6	1.92	2.03	2.12
3299.8	3329.8	2.05	2.19	2.32
3400.1	3430.1	2.24	2.42	2.57

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+14	+17	+20
2.0	1.53	2.20	3.02
4.0	1.49	2.18	2.98
10.9	1.47	2.12	2.94
90.3	1.71	2.45	3.35
170.6	1.71	2.45	3.34
250.8	1.71	2.46	3.36
331.0	1.69	2.43	3.30
411.3	1.65	2.35	3.17
491.5	1.59	2.26	3.03
571.8	1.54	2.18	2.91
652.0	1.51	2.13	2.82
732.2	1.48	2.08	2.75
812.5	1.45	2.03	2.67
892.7	1.42	1.98	2.59
972.9	1.39	1.93	2.51
1053.2	1.37	1.88	2.44
1133.4	1.34	1.84	2.39
1233.7	1.32	1.81	2.33
1313.9	1.30	1.78	2.29
1414.2	1.28	1.75	2.25
1494.5	1.27	1.73	2.21
1594.8	1.26	1.71	2.18
1675.0	1.26	1.69	2.14
1775.3	1.26	1.68	2.11
1855.5	1.26	1.66	2.07
1955.8	1.28	1.65	2.04
2036.1	1.30	1.66	2.03
2136.4	1.35	1.68	2.03
2216.6	1.40	1.73	2.07
2316.9	1.48	1.79	2.11
2397.1	1.56	1.87	2.19
2497.4	1.66	1.97	2.28
2577.7	1.75	2.07	2.38
2678.0	1.88	2.20	2.51
2758.2	1.99	2.32	2.62
2858.5	2.15	2.50	2.80
2938.7	2.27	2.61	2.92
3039.0	2.43	2.78	3.09
3119.3	2.55	2.90	3.21
3219.6	2.71	3.06	3.36
3299.8	2.89	3.22	3.52
3400.1	3.09	3.41	3.70

IF (OUT) (MHz)	IF VSWR @LO=2000.1MHz (:1)		
	@LO (dBm)		
	+14	+17	+20
4.0	1.28	1.51	1.68
8.0	1.27	1.50	1.67
10.0	1.18	1.31	1.39
27.7	1.20	1.33	1.43
45.4	1.19	1.34	1.46
63.1	1.19	1.35	1.49
80.8	1.17	1.32	1.45
98.5	1.16	1.30	1.40
116.2	1.20	1.33	1.44
133.8	1.23	1.37	1.49
151.5	1.25	1.39	1.51
169.2	1.23	1.37	1.49
186.9	1.23	1.37	1.49
204.6	1.24	1.37	1.48
222.3	1.24	1.36	1.46
240.0	1.26	1.37	1.47
257.7	1.28	1.40	1.50
275.4	1.31	1.42	1.52
293.1	1.32	1.41	1.50
310.8	1.31	1.41	1.49
328.5	1.34	1.45	1.53
346.2	1.38	1.49	1.58
363.8	1.37	1.47	1.55
381.5	1.34	1.43	1.52
399.2	1.34	1.43	1.51
416.9	1.37	1.46	1.53
434.6	1.41	1.49	1.56
452.3	1.41	1.50	1.57
470.0	1.41	1.51	1.60
487.7	1.41	1.50	1.58
505.4	1.39	1.47	1.53
523.1	1.40	1.48	1.55
540.8	1.46	1.54	1.61
558.5	1.48	1.57	1.63
576.2	1.45	1.53	1.59
593.8	1.42	1.50	1.56
611.5	1.46	1.54	1.60
629.2	1.52	1.58	1.63
646.9	1.52	1.58	1.63
664.6	1.48	1.55	1.60
682.3	1.47	1.53	1.59
700.0	1.48	1.53	1.58

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	2	19	8	21	10	32	15	35	17	41
1	-	33	+0	38	14	40	21	53	32	60	38	46
2	90	71	61	69	56	68	57	64	52	77	52	74
3	>100	>89	62	>89	63	88	65	84	76	>89	77	>89
4	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
5	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
6	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
7	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
8	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
9	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
10	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 1000.1 MHz; -5.00 dBm.  
 LO IN: 1030.01 MHz; +17.00 dBm  
 IF OUT: 29.91 MHz; -11.4 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	12	29	19	31	21	43	27	47	30	56
1	-	34	+0	38	14	41	21	55	32	62	38	49
2	82	59	51	58	46	55	46	56	43	70	44	65
3	>100	65	41	67	43	68	45	68	55	81	57	81
4	>100	88	83	75	70	75	66	74	66	73	62	80
5	>100	86	74	81	65	80	63	83	63	82	66	90
6	>100	>99	80	97	84	91	84	89	84	86	82	84
7	>100	>99	91	>99	95	92	88	91	83	92	80	94
8	>100	>99	98	>99	96	>99	92	>99	93	96	96	98
9	>100	>99	>99	>99	>99	>99	>99	>99	95	>99	98	>99
10	>100	>99	>99	>99	>99	>99	>99	>99	>99	>99	>99	>99
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 1000.1 MHz; 5.00 dBm.  
 LO IN: 1030.01 MHz; +17.00 dBm  
 IF OUT: 29.91 MHz; -1.43 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2  
 JYM-20H  
 100817  
 Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




## Typical Performance Curves


Conversion Loss @ IF=30MHz

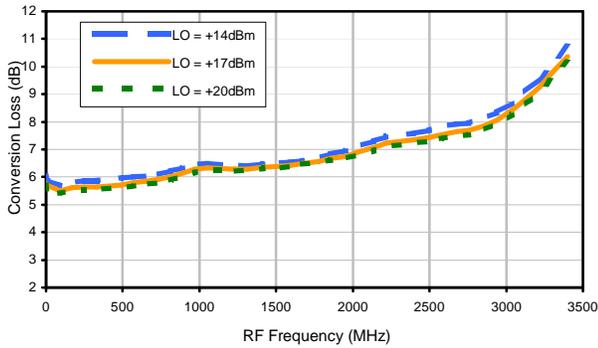


Conversion Loss vs. IF @ RF=1000.1MHz

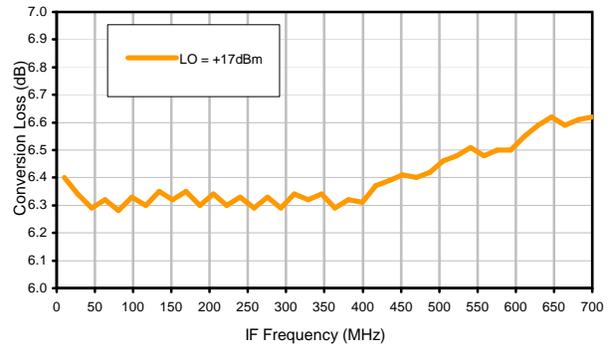


Conversion Loss vs. IF @ RF=10.1MHz

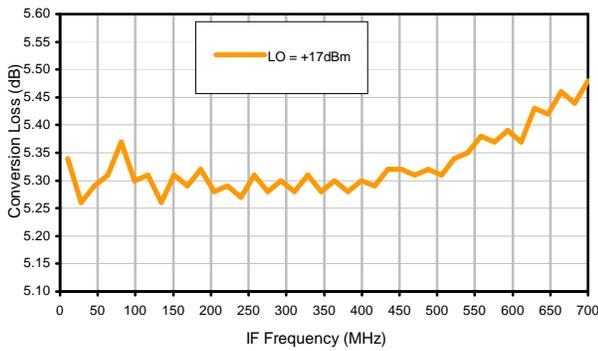


Conversion Loss vs. IF @ RF=2000.1MHz

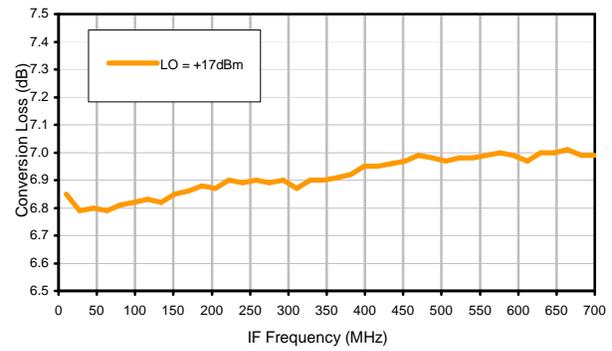

IP3 Input

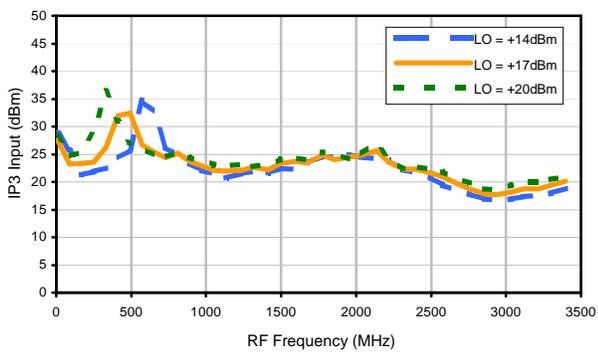


Compression @ RF IN=+10dBm

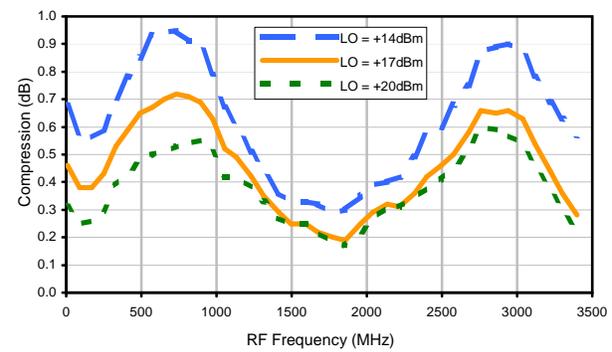


## Typical Performance Curves


LO-RF Isolation

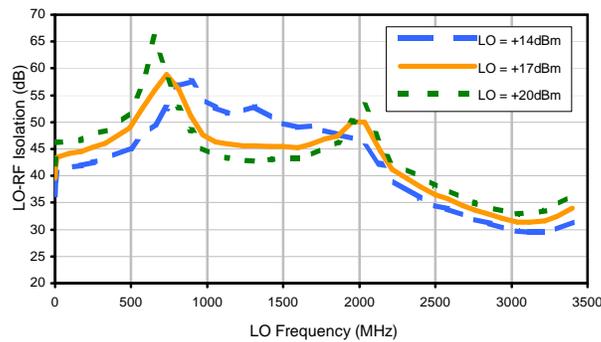


LO-IF Isolation

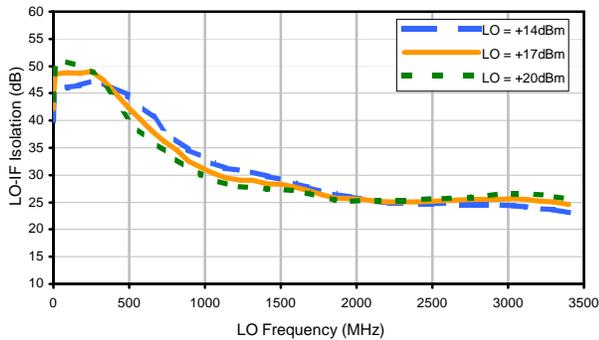


RF-IF Isolation

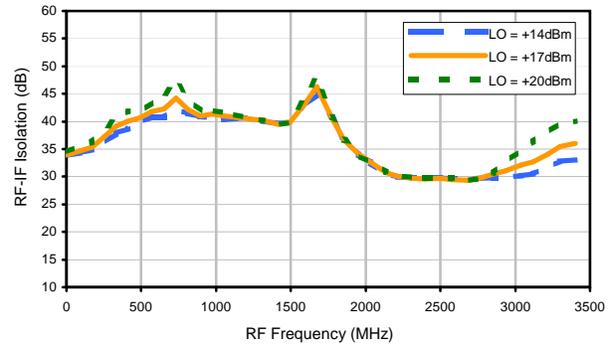


RF VSWR

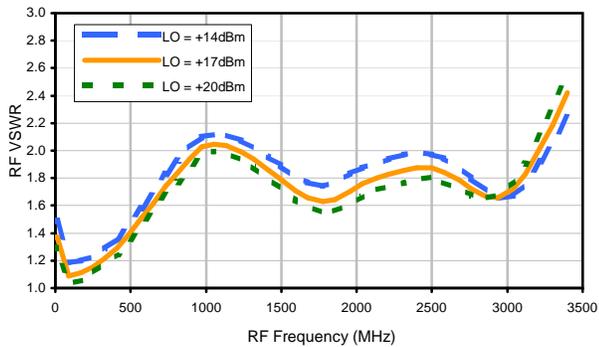

LO VSWR

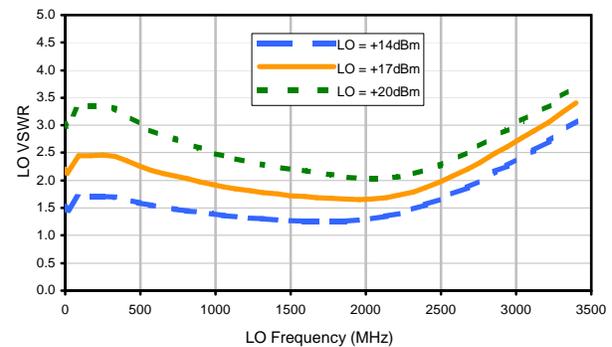

IF VSWR

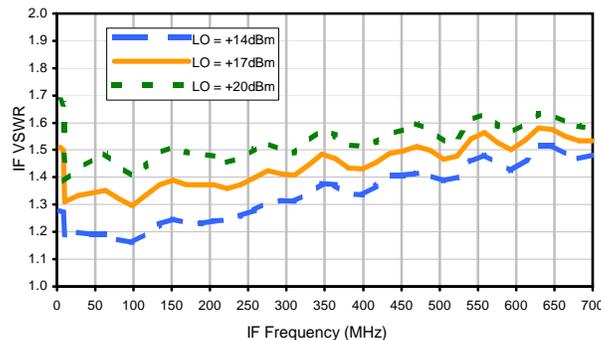

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	2	19	8	21	10	32	15	35	17	41
1	-	33	+0	38	14	40	21	53	32	60	38	46
2	90	71	61	69	56	68	57	64	52	77	52	74
3	>100	>89	62	>89	63	88	65	84	76	>89	77	>89
4	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
5	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
6	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
7	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
8	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
9	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
10	>100	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89	>89
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 1000.1 MHz; -5.00 dBm.  
 LO IN: 1030.01 MHz; +17.00 dBm  
 IF OUT: 29.91 MHz; -11.4 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	12	29	19	31	21	43	27	47	30	56
1	-	34	+0	38	14	41	21	55	32	62	38	49
2	82	59	51	58	46	55	46	56	43	70	44	65
3	>100	65	41	67	43	68	45	68	55	81	57	81
4	>100	88	83	75	70	75	66	74	66	73	62	80
5	>100	86	74	81	65	80	63	83	63	82	66	90
6	>100	>99	80	97	84	91	84	89	84	86	82	84
7	>100	>99	91	>99	95	92	88	91	83	92	80	94
8	>100	>99	98	>99	96	>99	92	>99	93	96	96	98
9	>100	>99	>99	>99	>99	>99	>99	>99	95	>99	98	>99
10	>100	>99	>99	>99	>99	>99	>99	>99	>99	>99	>99	>99
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 1000.1 MHz; 5.00 dBm.  
 LO IN: 1030.01 MHz; +17.00 dBm  
 IF OUT: 29.91 MHz; -1.43 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2  
 JYM-20H  
 100817  
 Page 3 of 3




IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://www.minicircuits.com)

## Outline Dimensions

BJ293  
BJ398

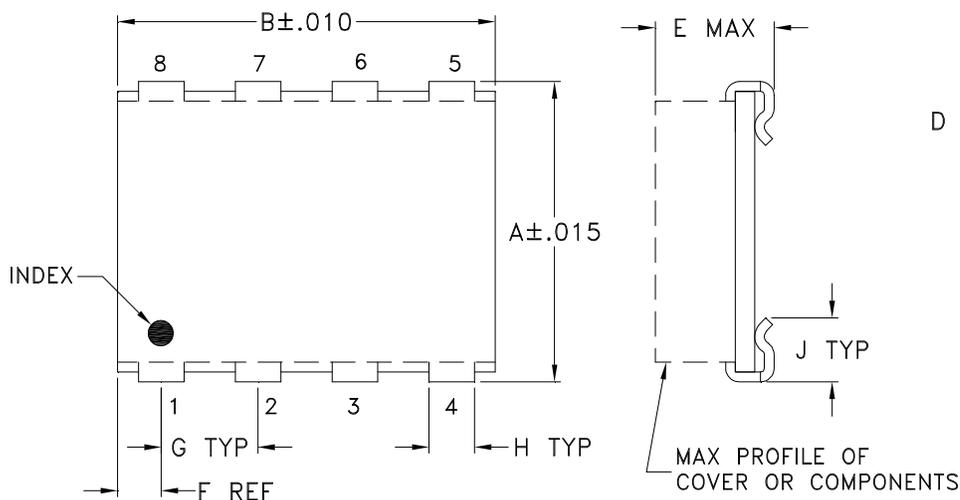

## PCB Land Pattern

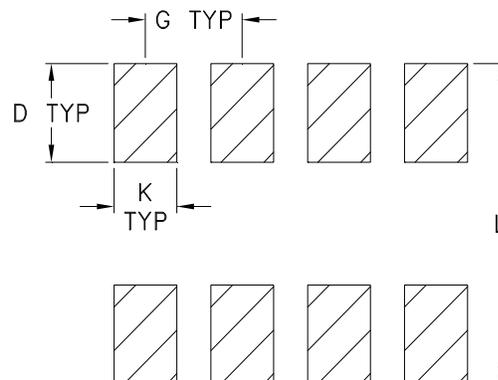

Suggested Layout,  
Tolerance to be within  $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT. GRAMS
BJ293	.395 (10.03)	.500 (12.70)	-- --	.100 (2.54)	.230 (5.84)	.100 (2.54)	.100 (2.54)	.047 (1.19)	.065 (1.65)	.065 (1.65)	.425 (10.80)	.80
BJ398	.305 (7.75)	.390 (9.91)	-- --	.100 (2.54)	.105 (2.67)	.045 (1.14)	.100 (2.54)	.047 (1.19)	.065 (1.65)	.065 (1.65)	.325 (8.26)	.20

Dimensions are in inches (mm). Tolerances: 2Pl.  $\pm .01$ ; 3Pl.  $\pm .005$

### Notes:

- Case material: Plastic.
- Base material: Printed wiring laminate.
- Termination finish:
  - For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
  - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

# Tape & Reel Packaging TR-F10

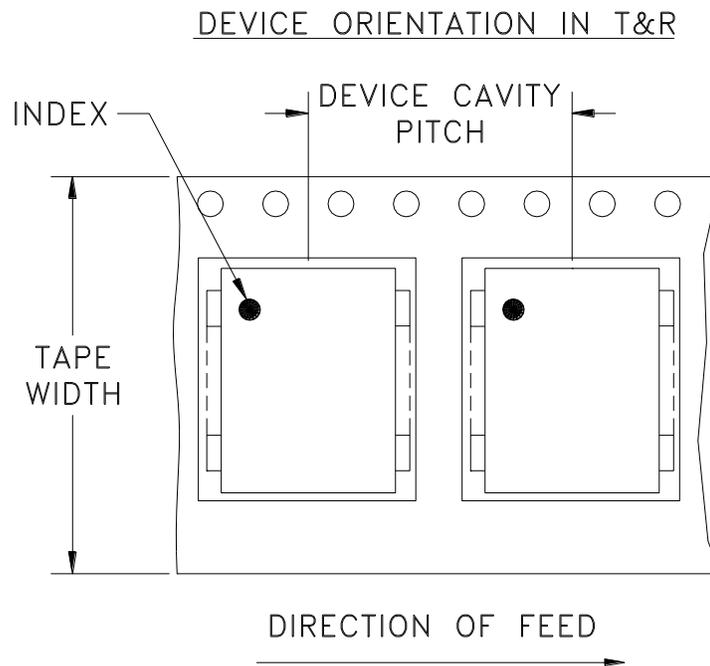

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
24	16	7	10,20,50,100
		13	200,500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)

Note: Please consult individual model data sheet to determine device per reel availability.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M94649	NEW RELEASE	10/11/04	MMG	WL
A	M102713	ADDED "...WITH SMOBC"	01/14/06	GF	IL

**SUGGESTED MOUNTING CONFIGURATION  
FOR BJ293 CASE STYLE, "hp" PIN CONNECTION.**

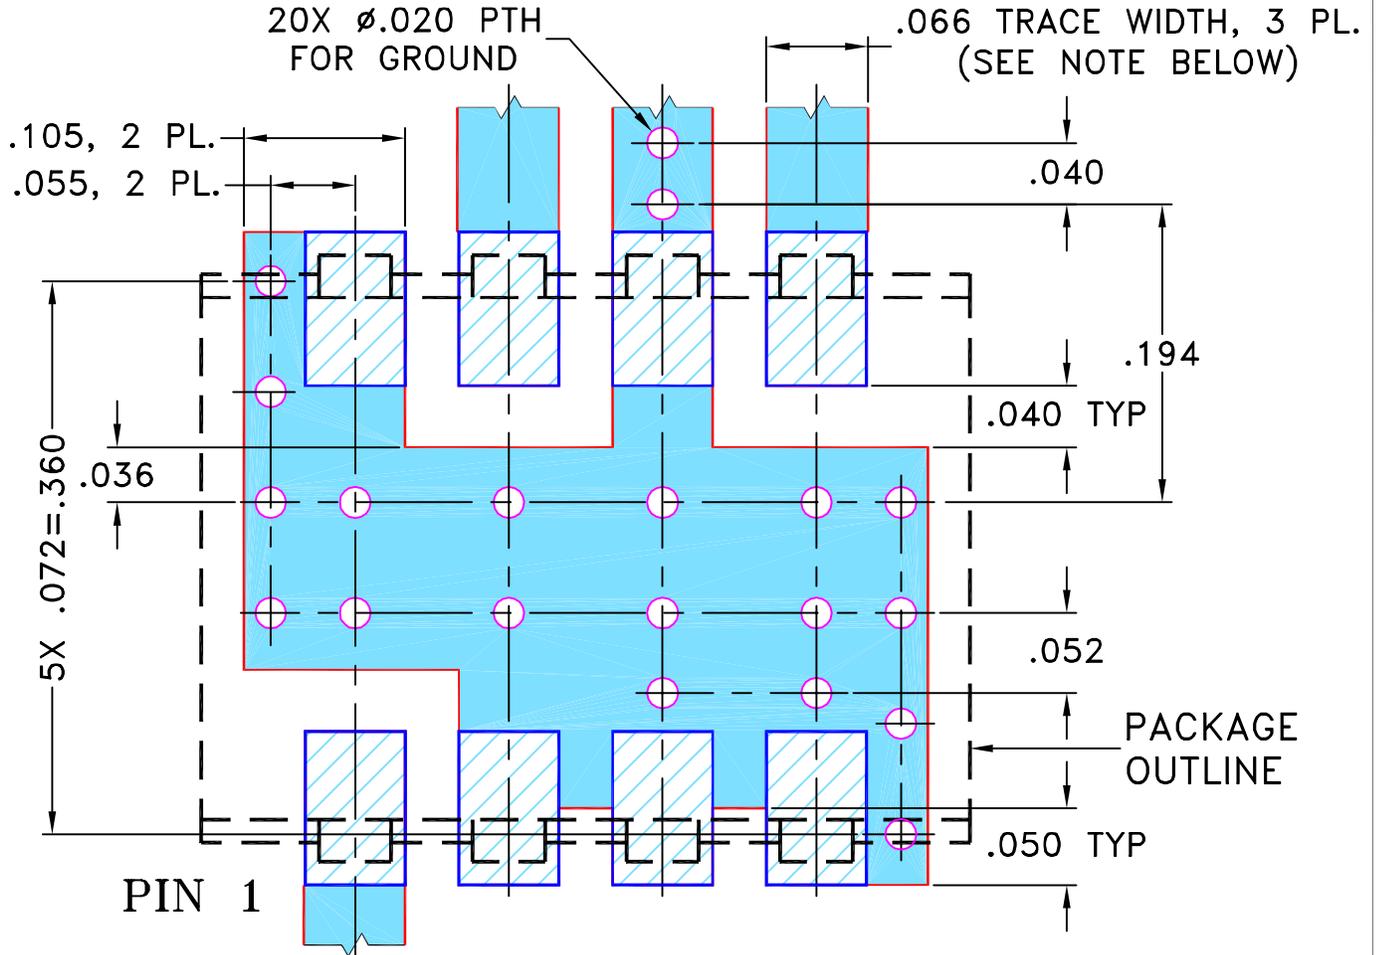

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	MMG	10/04/04
TOLERANCES ON:	AV	10/11/04
2 PL DECIMALS ±	WL	10/11/04
3 PL DECIMALS ± .005		
ANGLES ±		
FRACTIONS ±		

**Mini-Circuits®** 13 Neptune Avenue  
Brooklyn NY 11235


**PL, hp, BJ293, JYM, TB-259**

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-080	REV: A
FILE: 98PL080	SCALE: 8:1	SHEET: 1 OF 1	


Mini-Circuits®  
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

# Evaluation Board and Circuit

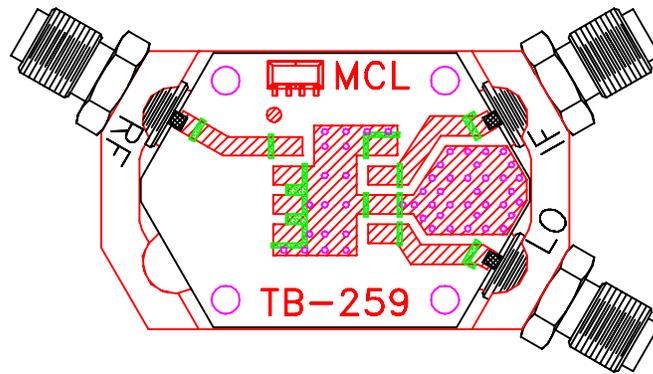

TB-259

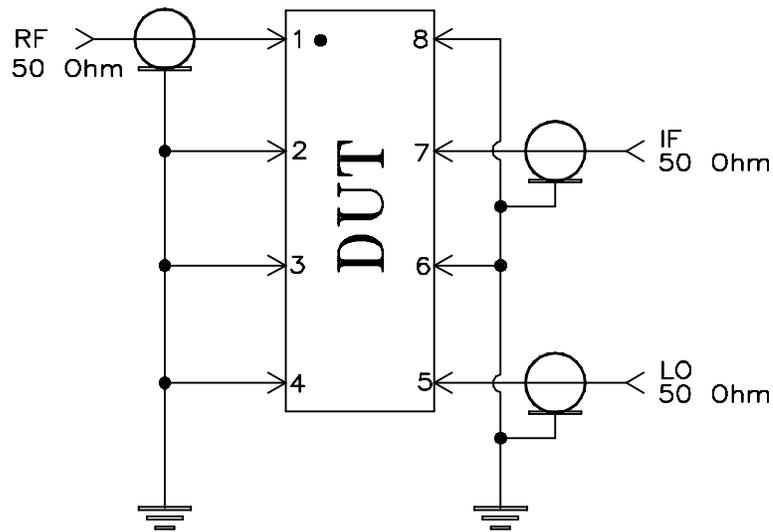

Schematic Diagram

## Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**