

Non-Catalog Model

Frequency Mixer

LRMS-1WHJ

Level 17 (LO Power +17 dBm)

Important Note

This is a non-catalog model and can be manufactured on specific request.
Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : QQQ569

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	10		750	MHz
	RF (fL to fU)	10		750	MHz
	IF	0		750	MHz
Conversion Loss	mid band		7.0	8.5	dB
	Total Range			8.8	dB
LO-RF Isolation	Low Range	40	55		dB
	Mid Range	22	43		dB
	Upper Range	20	28		dB
LO-IF Isolation	Low Range	30	52		dB
	Mid Range	22	38		dB
	Upper Range	20	29		dB
1 dB Comp. Input Power			+14		dBm

Notes: Low Range = [fL to 10fL]
mid band = [2fL to fU/2]

Mid Range = [10fL to fU/2]


Upper Range = [fU/2 to fU]

Phase detection, positive polarity.
Aqueous washable.

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA

PIN CONNECTIONS	
LO	1
RF	4
IF	5
GROUND	2, 3, 6

Electrical Schematics

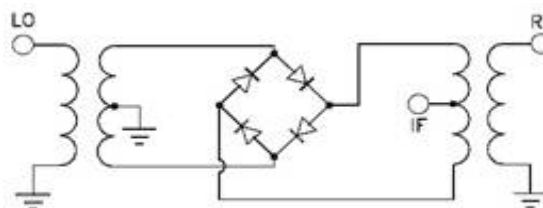

Frequency Mixer

LRMS-1WHJ

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+14	+17	+20
5.0	35.0	8.68	7.75	7.20
10.0	40.0	8.40	7.52	7.00
49.6	79.6	8.24	7.19	6.81
89.0	119.0	8.14	7.16	6.76
128.5	158.5	8.13	7.10	6.74
167.9	197.9	7.99	7.04	6.71
207.4	237.4	7.83	6.88	6.65
246.8	276.8	7.95	7.01	6.75
286.3	316.3	7.62	6.85	6.65
325.7	355.7	7.66	6.95	6.74
365.2	395.2	7.47	6.88	6.70
404.6	434.6	7.46	6.86	6.67
444.1	474.1	7.49	6.90	6.66
483.5	513.5	7.54	6.95	6.70
523.0	553.0	7.62	7.10	6.76
562.4	592.4	7.55	7.03	6.76
601.9	631.9	7.63	7.09	6.81
641.3	671.3	7.59	7.02	6.74
680.8	710.8	7.63	7.03	6.74
720.2	750.2	7.76	7.11	6.81
759.7	789.7	7.88	7.21	6.89
799.1	829.1	8.07	7.43	7.04
838.6	868.6	8.26	7.55	7.16
878.0	908.0	8.53	7.77	7.36
956.9	986.9	9.12	8.21	7.57
996.4	1026.4	9.45	8.50	7.71
1035.9	1065.9	9.57	8.52	7.69
1075.3	1105.3	9.62	8.46	7.66
1114.8	1144.8	9.71	8.49	7.70
1154.2	1184.2	9.65	8.48	7.76
1193.7	1223.7	9.62	8.51	7.81
1213.4	1243.4	9.73	8.57	7.92
1252.8	1282.8	9.72	8.61	8.05
1272.6	1302.6	9.86	8.77	8.22
1312.0	1342.0	10.02	8.93	8.41
1331.7	1361.7	10.17	9.08	8.52
1371.2	1401.2	10.46	9.44	8.88
1390.9	1420.9	10.56	9.58	9.03
1430.4	1460.4	10.87	9.97	9.43
1450.1	1480.1	10.99	10.18	9.65

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	23.14	26.98	30.82
49.6	79.6	22.12	25.41	28.70
89.0	119.0	22.93	26.25	29.08
128.5	158.5	23.19	26.06	28.63
167.9	197.9	23.15	26.25	30.44
207.4	237.4	23.71	27.23	29.52
246.8	276.8	21.82	25.79	31.60
286.3	316.3	23.97	29.07	27.34
325.7	355.7	23.22	28.35	27.98
365.2	395.2	26.93	27.04	27.73
404.6	434.6	26.67	26.20	25.55
444.1	474.1	24.73	25.15	25.17
483.5	513.5	23.95	23.37	24.80
523.0	553.0	23.98	23.83	25.09
562.4	592.4	26.04	24.76	26.31
601.9	631.9	26.00	25.14	26.46
641.3	671.3	27.48	25.51	27.35
680.8	710.8	25.13	24.93	26.22
720.2	750.2	21.34	23.67	25.57
759.7	789.7	19.09	22.46	25.79
799.1	829.1	17.54	20.26	24.80
838.6	868.6	16.64	18.66	22.75
878.0	908.0	16.49	17.79	21.34
917.5	947.5	16.23	16.95	19.87
956.9	986.9	15.85	16.83	19.32
996.4	1026.4	16.28	17.44	20.39
1035.9	1065.9	16.69	18.72	22.07
1075.3	1105.3	17.56	20.79	25.61
1114.8	1144.8	17.86	21.54	26.52
1154.2	1184.2	18.78	22.00	25.50
1193.7	1223.7	19.09	21.64	23.79
1213.4	1243.4	18.93	21.55	23.27
1252.8	1282.8	18.81	21.20	22.83
1272.6	1302.6	18.57	20.77	22.92
1312.0	1342.0	18.76	20.88	22.83
1331.7	1361.7	18.93	20.78	22.73
1371.2	1401.2	19.29	21.27	23.03
1390.9	1420.9	19.18	21.55	23.13
1430.4	1460.4	19.29	21.92	23.83
1450.1	1480.1	19.61	21.82	23.48

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+14dBm (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	0.36	0.19	0.11
49.6	79.6	0.25	0.15	0.07
89.0	119.0	0.30	0.10	0.06
128.5	158.5	0.37	0.12	0.09
167.9	197.9	0.29	0.16	0.09
207.4	237.4	0.41	0.20	0.10
246.8	276.8	0.33	0.16	0.09
286.3	316.3	0.58	0.21	0.10
325.7	355.7	0.51	0.17	0.07
365.2	395.2	0.65	0.18	0.11
404.6	434.6	0.61	0.21	0.14
444.1	474.1	0.60	0.22	0.14
483.5	513.5	0.59	0.21	0.17
523.0	553.0	0.60	0.19	0.17
562.4	592.4	0.68	0.25	0.21
601.9	631.9	0.71	0.29	0.24
641.3	671.3	0.79	0.40	0.30
680.8	710.8	0.79	0.45	0.33
720.2	750.2	0.92	0.57	0.43
759.7	789.7	0.97	0.66	0.50
799.1	829.1	0.90	0.67	0.54
838.6	868.6	0.89	0.69	0.55
878.0	908.0	0.80	0.66	0.56
917.5	947.5	0.67	0.63	0.59
956.9	986.9	0.47	0.51	0.57
996.4	1026.4	0.35	0.43	0.59
1035.9	1065.9	0.33	0.48	0.65
1075.3	1105.3	0.36	0.53	0.69
1114.8	1144.8	0.39	0.60	0.77
1154.2	1184.2	0.50	0.65	0.73
1193.7	1223.7	0.63	0.71	0.70
1213.4	1243.4	0.66	0.71	0.70
1252.8	1282.8	0.74	0.78	0.69
1272.6	1302.6	0.72	0.73	0.69
1312.0	1342.0	0.80	0.77	0.72
1331.7	1361.7	0.72	0.75	0.71
1371.2	1401.2	0.79	0.78	0.77
1390.9	1420.9	0.85	0.81	0.79
1430.4	1460.4	0.68	0.75	0.78
1450.1	1480.1	0.64	0.72	0.76

Frequency Mixer

LRMS-1WHJ

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=375.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=750.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+17			+17			+17
355.0	20.1	7.06	10.0	20.1	7.04	740.0	10.1	7.22
346.2	28.9	7.10	28.7	38.8	6.84	721.3	28.8	7.15
337.3	37.8	6.98	47.4	57.5	6.99	702.6	47.5	7.09
328.5	46.6	7.06	66.2	76.3	7.06	683.8	66.3	6.93
319.6	55.5	6.98	84.9	95.0	7.09	665.1	85.0	6.92
310.8	64.3	7.02	103.6	113.7	6.97	646.4	103.7	6.87
301.9	73.2	7.02	122.3	132.4	6.92	627.7	122.4	6.84
293.1	82.0	6.99	141.0	151.1	7.03	609.0	141.1	6.72
284.2	90.9	7.06	159.7	169.8	7.13	590.3	159.8	6.57
275.4	99.7	6.98	178.5	188.6	7.08	571.5	178.6	6.60
266.5	108.6	6.98	197.2	207.3	7.03	552.8	197.3	6.53
257.7	117.4	6.89	215.9	226.0	7.03	534.1	216.0	6.53
248.8	126.3	6.86	234.6	244.7	7.11	515.4	234.7	6.43
240.0	135.1	6.81	253.3	263.4	7.20	496.7	253.4	6.46
231.2	143.9	6.78	272.1	282.2	7.16	477.9	272.2	6.42
222.3	152.8	6.85	290.8	300.9	7.12	459.2	290.9	6.48
213.5	161.6	6.73	309.5	319.6	7.11	440.5	309.6	6.53
204.6	170.5	6.85	328.2	338.3	7.26	421.8	328.3	6.50
195.8	179.3	6.77	346.9	357.0	7.19	403.1	347.0	6.48
186.9	188.2	6.52	365.6	375.7	7.25	384.4	365.7	6.56
178.1	197.0	6.73	384.4	394.5	7.25	365.6	384.5	6.62
169.2	205.9	6.71	403.1	413.2	7.26	346.9	403.2	6.63
160.4	214.7	6.73	421.8	431.9	7.29	328.2	421.9	6.69
151.5	223.6	6.62	440.5	450.6	7.34	309.5	440.6	6.71
142.7	232.4	6.68	459.2	469.3	7.34	290.8	459.3	6.77
133.8	241.3	6.64	477.9	488.0	7.26	272.1	478.0	6.81
125.0	250.1	6.63	496.7	506.8	7.33	253.3	496.8	6.88
116.2	258.9	6.63	515.4	525.5	7.30	234.6	515.5	6.83
107.3	267.8	6.66	534.1	544.2	7.33	215.9	534.2	6.88
98.5	276.6	6.74	552.8	562.9	7.34	197.2	552.9	6.88
89.6	285.5	6.66	571.5	581.6	7.39	178.5	571.6	6.90
80.8	294.3	6.71	590.3	600.4	7.36	159.7	590.4	6.90
71.9	303.2	6.72	609.0	619.1	7.36	141.0	609.1	6.93
63.1	312.0	6.74	627.7	637.8	7.37	122.3	627.8	6.93
54.2	320.9	6.72	646.4	656.5	7.36	103.6	646.5	6.95
45.4	329.7	6.74	665.1	675.2	7.43	84.9	665.2	7.03
36.5	338.6	6.80	683.8	693.9	7.33	66.2	683.9	7.03
27.7	347.4	6.80	702.6	712.7	7.36	47.4	702.7	7.10
18.8	356.3	6.80	721.3	731.4	7.35	28.7	721.4	7.11
10.0	365.1	6.88	740.0	750.1	7.40	10.0	740.1	7.22

REV. X2
LRMS-1WHJ
100817
Page 2 of 5

Frequency Mixer

LRMS-1WHJ

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+14	+17	+20	+14	+17	+20
5.0	64.86	66.55	68.27	73.06	73.50	71.89
10.0	62.27	63.83	65.42	72.36	69.50	66.38
49.6	48.22	49.77	51.26	72.06	62.16	56.33
89.0	43.04	44.44	45.81	62.59	60.80	53.32
128.5	39.90	41.46	42.88	58.35	58.96	49.97
167.9	37.77	39.17	40.54	54.06	59.78	49.34
207.4	36.09	37.53	38.97	50.83	60.78	49.53
246.8	34.87	36.38	37.68	48.75	64.84	48.54
286.3	33.76	35.29	36.49	46.02	54.28	49.85
325.7	33.00	34.54	35.82	43.94	50.63	48.59
365.2	32.35	33.81	34.95	41.07	45.71	46.67
404.6	31.78	33.16	34.25	39.18	43.74	46.35
444.1	31.42	32.67	33.65	37.37	41.60	44.12
483.5	31.05	32.12	33.06	35.79	39.81	42.98
523.0	30.93	32.14	33.01	34.60	38.03	41.32
562.4	30.61	31.85	32.67	33.31	36.53	39.67
601.9	30.41	31.63	32.32	32.26	35.95	38.90
641.3	30.14	31.14	31.86	30.86	34.79	38.04
680.8	29.78	30.72	31.40	29.83	34.07	38.12
720.2	29.40	30.32	31.05	28.75	32.81	37.81
759.7	29.00	29.80	30.56	28.00	31.62	37.02
799.1	28.72	29.59	30.39	27.66	30.98	35.63
838.6	28.65	29.57	30.37	27.23	30.30	34.07
878.0	28.67	29.82	30.63	27.17	30.27	33.60
956.9	28.90	30.13	31.08	26.61	29.46	32.00
996.4	28.86	30.09	30.88	26.36	29.27	31.79
1035.9	28.93	30.01	30.55	26.07	28.98	31.26
1075.3	29.06	29.91	30.14	26.25	29.13	31.07
1114.8	28.85	29.34	29.49	25.47	29.08	32.50
1154.2	28.52	28.82	28.76	25.04	29.39	34.32
1193.7	28.41	28.54	28.38	24.48	29.08	34.91
1213.4	28.26	28.25	28.02	23.76	28.14	34.00
1252.8	28.35	28.15	27.83	23.18	27.21	32.34
1272.6	28.34	27.98	27.69	22.80	26.65	31.35
1312.0	28.18	27.60	27.26	22.36	26.07	30.63
1331.7	28.15	27.57	27.25	22.11	25.81	30.35
1371.2	27.83	27.04	26.61	22.22	26.02	30.81
1390.9	27.67	26.80	26.36	22.12	25.94	30.77
1430.4	27.40	26.51	26.05	22.12	26.17	31.23
1450.1	26.95	26.20	25.71	22.39	26.63	31.86

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	48.36	48.74	56.64
49.6	79.6	38.18	38.05	37.95
89.0	119.0	33.60	33.68	33.54
128.5	158.5	31.09	31.35	31.20
167.9	197.9	29.46	29.63	29.58
207.4	237.4	28.37	28.59	28.62
246.8	276.8	27.73	27.89	28.04
286.3	316.3	27.52	27.66	27.75
325.7	355.7	27.27	27.96	28.08
365.2	395.2	27.10	28.00	28.65
404.6	434.6	27.19	28.37	29.29
444.1	474.1	27.55	28.71	29.50
483.5	513.5	27.85	28.56	28.89
523.0	553.0	27.27	27.81	28.14
562.4	592.4	25.53	25.99	26.64
601.9	631.9	23.19	23.56	24.18
641.3	671.3	21.09	21.27	21.65
680.8	710.8	19.32	19.21	19.31
720.2	750.2	17.86	17.53	17.38
759.7	789.7	16.63	16.20	15.94
799.1	829.1	15.85	15.33	14.99
838.6	868.6	15.20	14.71	14.33
878.0	908.0	14.56	14.10	13.79
917.5	947.5	13.87	13.55	13.25
956.9	986.9	13.25	12.97	12.79
996.4	1026.4	12.65	12.48	12.40
1035.9	1065.9	12.08	12.09	12.04
1075.3	1105.3	11.70	11.82	11.92
1114.8	1144.8	11.34	11.45	11.64
1154.2	1184.2	11.04	11.25	11.35
1193.7	1223.7	10.96	11.12	11.17
1213.4	1243.4	10.93	11.13	11.18
1252.8	1282.8	10.88	11.12	11.15
1272.6	1302.6	10.86	11.09	11.15
1312.0	1342.0	10.73	11.04	11.08
1331.7	1361.7	10.65	10.98	11.01
1371.2	1401.2	10.46	10.76	10.83
1390.9	1420.9	10.37	10.66	10.72
1430.4	1460.4	10.15	10.37	10.40
1450.1	1480.1	10.01	10.17	10.18

Frequency Mixer

LRMS-1WHJ

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+14	+17	+20
5.0	35.0	1.94	2.02	2.07
10.0	40.0	1.58	1.71	1.83
49.6	79.6	1.03	1.14	1.25
89.0	119.0	1.04	1.16	1.26
128.5	158.5	1.05	1.17	1.27
167.9	197.9	1.06	1.18	1.28
207.4	237.4	1.07	1.21	1.31
246.8	276.8	1.06	1.17	1.29
286.3	316.3	1.08	1.23	1.32
325.7	355.7	1.08	1.22	1.33
365.2	395.2	1.10	1.25	1.35
404.6	434.6	1.11	1.27	1.37
444.1	474.1	1.12	1.28	1.38
483.5	513.5	1.13	1.27	1.37
523.0	553.0	1.14	1.27	1.37
562.4	592.4	1.18	1.30	1.39
601.9	631.9	1.20	1.33	1.42
641.3	671.3	1.23	1.37	1.47
680.8	710.8	1.27	1.42	1.52
720.2	750.2	1.27	1.44	1.54
759.7	789.7	1.28	1.44	1.53
799.1	829.1	1.27	1.40	1.51
838.6	868.6	1.25	1.37	1.47
878.0	908.0	1.24	1.33	1.42
917.5	947.5	1.26	1.32	1.40
956.9	986.9	1.31	1.34	1.42
996.4	1026.4	1.40	1.42	1.49
1035.9	1065.9	1.53	1.55	1.60
1075.3	1105.3	1.68	1.69	1.74
1114.8	1144.8	1.86	1.86	1.89
1154.2	1184.2	2.06	2.05	2.07
1193.7	1223.7	2.28	2.25	2.25
1213.4	1243.4	2.39	2.36	2.34
1252.8	1282.8	2.60	2.55	2.52
1272.6	1302.6	2.72	2.67	2.63
1312.0	1342.0	2.93	2.87	2.82
1331.7	1361.7	3.06	2.99	2.92
1371.2	1401.2	3.24	3.17	3.10
1390.9	1420.9	3.34	3.26	3.19
1430.4	1460.4	3.50	3.43	3.35
1450.1	1480.1	3.56	3.49	3.42

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+14	+17	+20
5.0	1.52	1.97	2.71
10.0	1.32	1.87	2.69
49.6	1.11	1.79	2.71
89.0	1.09	1.66	2.44
128.5	1.10	1.74	2.62
167.9	1.09	1.68	2.48
207.4	1.10	1.68	2.51
246.8	1.11	1.72	2.57
286.3	1.09	1.68	2.48
325.7	1.11	1.74	2.60
365.2	1.10	1.72	2.53
404.6	1.12	1.75	2.58
444.1	1.14	1.78	2.62
483.5	1.15	1.77	2.58
523.0	1.19	1.83	2.68
562.4	1.21	1.83	2.63
601.9	1.24	1.87	2.69
641.3	1.29	1.89	2.70
680.8	1.31	1.90	2.69
720.2	1.37	1.96	2.77
759.7	1.41	1.98	2.76
799.1	1.46	2.05	2.84
838.6	1.51	2.09	2.87
878.0	1.53	2.11	2.88
917.5	1.57	2.15	2.92
956.9	1.61	2.17	2.93
996.4	1.62	2.17	2.92
1035.9	1.64	2.17	2.91
1075.3	1.66	2.16	2.89
1114.8	1.68	2.15	2.86
1154.2	1.71	2.17	2.88
1193.7	1.76	2.18	2.87
1213.4	1.79	2.20	2.87
1252.8	1.86	2.25	2.92
1272.6	1.90	2.27	2.94
1312.0	1.98	2.29	2.92
1331.7	2.03	2.33	2.95
1371.2	2.13	2.40	3.00
1390.9	2.19	2.42	2.99
1430.4	2.32	2.48	3.02
1450.1	2.38	2.53	3.06

IF (OUT) (MHz)	IF VSWR @LO=750.1MHz (:1)		
	@LO (dBm)		
	+14	+17	+20
5.0	1.30	1.07	1.07
10.0	1.31	1.07	1.06
29.0	2.53	1.98	1.61
47.9	2.42	1.86	1.55
66.9	2.49	1.91	1.60
85.9	2.43	1.89	1.56
104.9	2.48	1.95	1.60
123.8	2.42	1.88	1.55
142.8	2.46	1.89	1.57
161.8	2.48	1.90	1.58
180.8	2.47	1.90	1.58
199.7	2.46	1.90	1.56
218.7	2.43	1.89	1.54
237.7	2.42	1.87	1.54
256.7	2.42	1.86	1.55
275.6	2.39	1.84	1.53
294.6	2.41	1.87	1.54
313.6	2.41	1.89	1.55
332.6	2.40	1.87	1.55
351.5	2.38	1.85	1.54
370.5	2.42	1.87	1.56
389.5	2.41	1.88	1.57
408.5	2.37	1.86	1.55
427.4	2.38	1.86	1.55
446.4	2.39	1.88	1.58
465.4	2.39	1.88	1.59
484.4	2.35	1.85	1.57
503.3	2.37	1.88	1.58
522.3	2.36	1.87	1.58
541.3	2.31	1.85	1.58
560.3	2.29	1.83	1.57
579.2	2.35	1.87	1.61
598.2	2.35	1.89	1.63
617.2	2.28	1.84	1.59
636.2	2.28	1.83	1.58
655.1	2.27	1.84	1.61
674.1	2.27	1.85	1.63
693.1	2.25	1.81	1.60
712.1	2.25	1.80	1.59
731.0	2.26	1.83	1.62
750.0	1.98	1.83	1.80

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	20	34	11	23	19	35	32	52	46	54
1	-	21	+0	31	15	30	26	45	30	44	35	45
2	98	56	45	56	46	69	45	54	50	68	76	62
3	>100	73	63	65	55	64	50	73	49	62	53	79
4	>100	83	77	84	75	89	77	80	75	77	70	80
5	>100	87	82	87	79	88	75	>92	77	90	75	86
6	>100	>92	>92	>92	>92	>92	88	>92	88	>92	86	>92
7	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
8	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
9	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
10	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	91	>92
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 370.1 MHz; -1.00 dBm.
LO IN: 400.01 MHz; +17.00 dBm
IF OUT: 29.91 MHz; -8.06 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	31	43	23	38	35	47	48	59	50	62
1	-	21	+0	29	15	32	24	40	37	50	44	51
2	85	50	42	50	40	56	38	51	42	73	58	72
3	>100	53	44	64	47	56	38	55	41	55	43	60
4	>100	64	57	66	56	70	60	78	55	67	63	69
5	>100	66	62	63	56	61	52	61	50	85	48	60
6	>100	75	67	90	70	73	78	72	71	68	64	66
7	>100	90	80	72	79	76	70	75	65	77	65	86
8	>100	91	89	86	84	83	92	87	80	79	74	77
9	>100	97	88	90	78	78	75	81	73	83	73	86
10	>100	>102	101	>102	97	92	93	86	87	86	81	83
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 370.1 MHz; 9.00 dBm.
LO IN: 400.01 MHz; +17.00 dBm
IF OUT: 29.91 MHz; 1.94 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
LRMS-1WHJ
100817
Page 5 of 5




Frequency Mixer


LRMS-1WHJ

Typical Performance Curves


Conversion Loss @ IF=30MHz

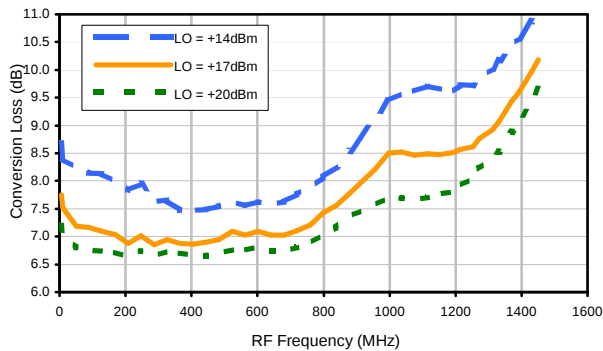


Conversion Loss vs. IF @ RF=375.1MHz

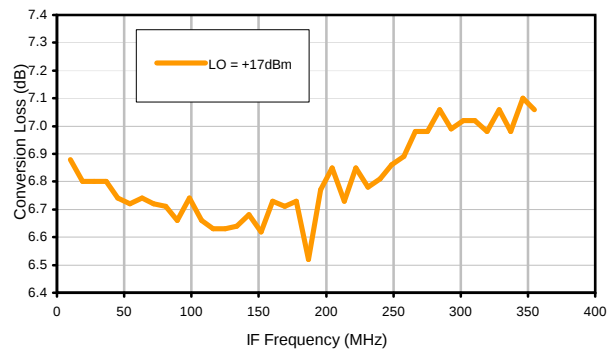


Conversion Loss vs. IF @ RF=10.1MHz

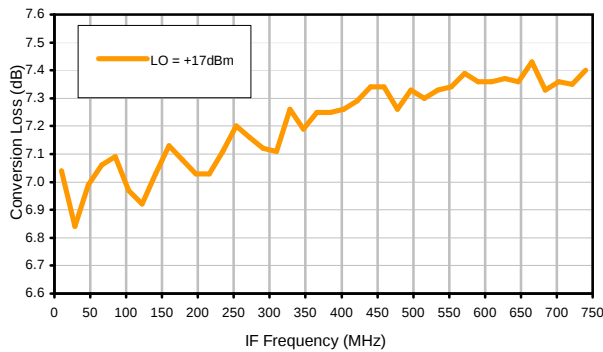


Conversion Loss vs. IF @ RF=750.1MHz

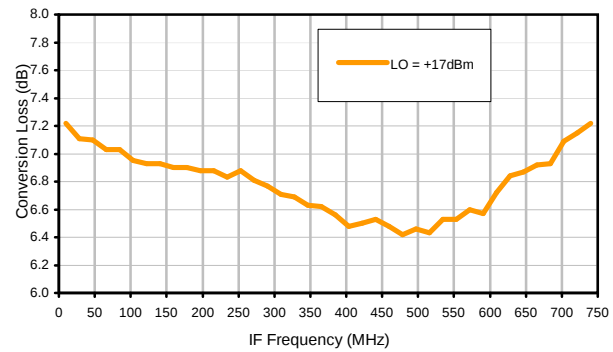

IP3 Input

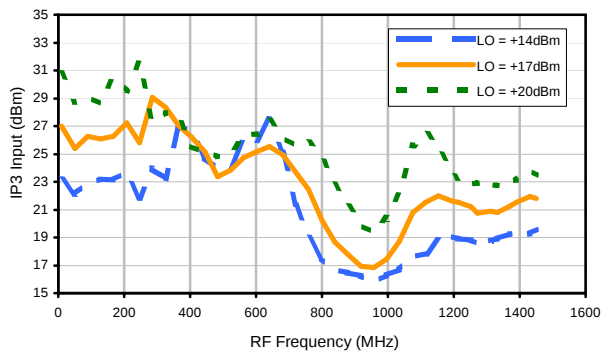

Compression @ RF IN=+14dBm

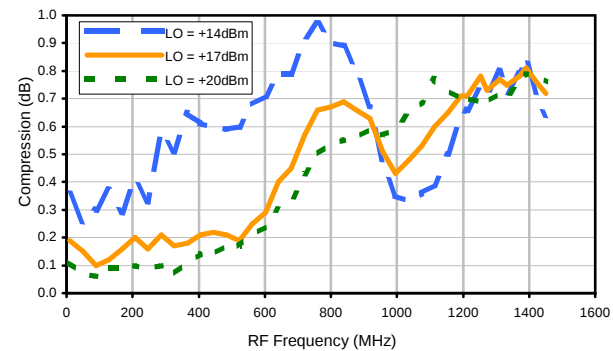


Frequency Mixer


LRMS-1WHJ

Typical Performance Curves


LO-RF Isolation

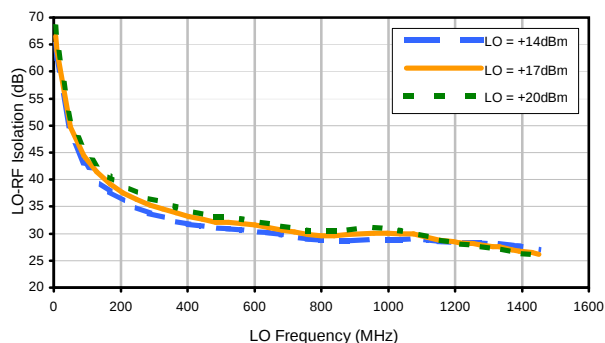


LO-IF Isolation

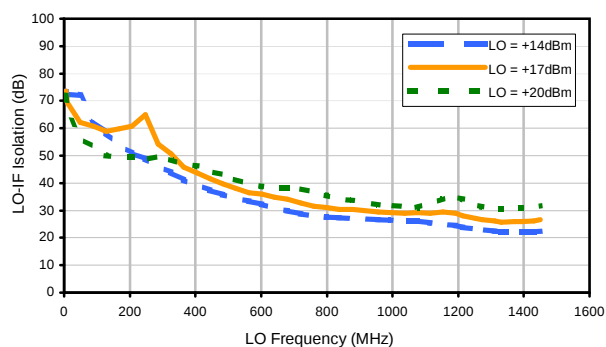


RF-IF Isolation

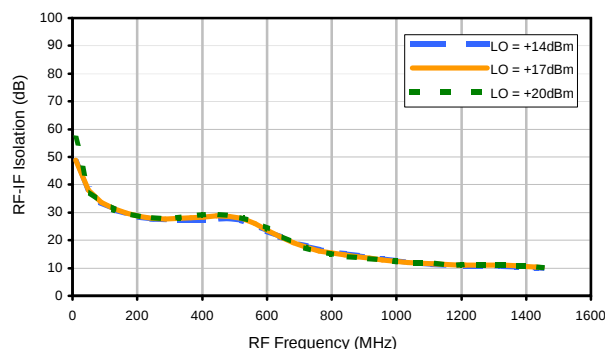


RF VSWR

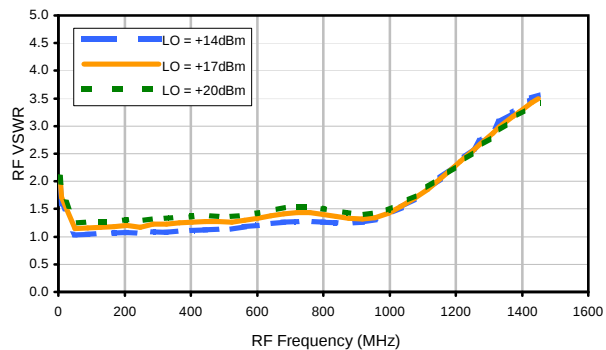

LO VSWR

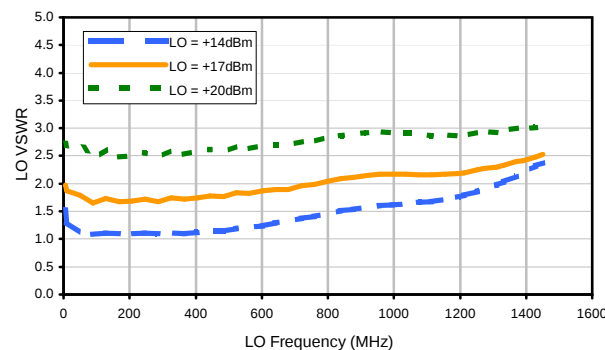

IF VSWR

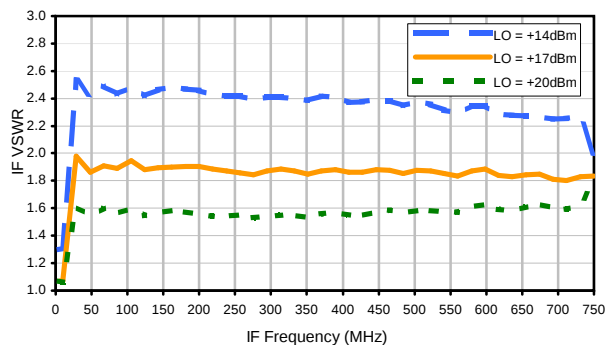

REV. X2
LRMS-1WHJ
100817
Page 2 of 3



Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	20	34	11	23	19	35	32	52	46	54
1	-	21	+0	31	15	30	26	45	30	44	35	45
2	98	56	45	56	46	69	45	54	50	68	76	62
3	>100	73	63	65	55	64	50	73	49	62	53	79
4	>100	83	77	84	75	89	77	80	75	77	70	80
5	>100	87	82	87	79	88	75	>92	77	90	75	86
6	>100	>92	>92	>92	>92	>92	88	>92	88	>92	86	>92
7	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
8	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
9	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
10	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	91	>92
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 370.1 MHz; -1.00 dBm.
LO IN: 400.01 MHz; +17.00 dBm
IF OUT: 29.91 MHz; -8.06 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	31	43	23	38	35	47	48	59	50	62
1	-	21	+0	29	15	32	24	40	37	50	44	51
2	85	50	42	50	40	56	38	51	42	73	58	72
3	>100	53	44	64	47	56	38	55	41	55	43	60
4	>100	64	57	66	56	70	60	78	55	67	63	69
5	>100	66	62	63	56	61	52	61	50	85	48	60
6	>100	75	67	90	70	73	78	72	71	68	64	66
7	>100	90	80	72	79	76	70	75	65	77	65	86
8	>100	91	89	86	84	83	92	87	80	79	74	77
9	>100	97	88	90	78	78	75	81	73	83	73	86
10	>100	>102	101	>102	97	92	93	86	87	86	81	83
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER


Test conditions: RF IN: 370.1 MHz; 9.00 dBm.
LO IN: 400.01 MHz; +17.00 dBm
IF OUT: 29.91 MHz; 1.94 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.


REV. X2
LRMS-1WHJ
100817
Page 3 of 3



Outline Dimensions

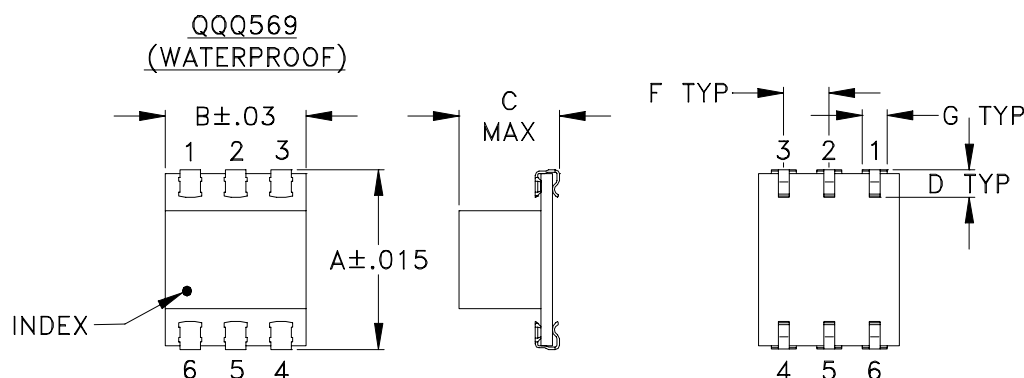

PCB Land Pattern

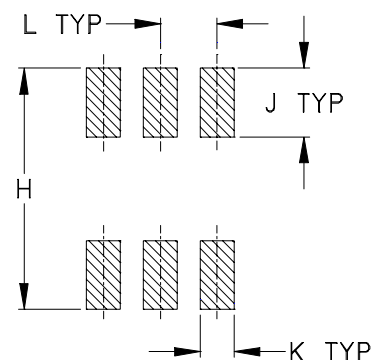

Suggested Layout,
Tolerance to be within $\pm .002$


CASE#	A	B	C	D	E	F	G	H	J	K	L	M	WT, GRAM
QQQ569	.390 (9.90)	.31 (7.87)	.225 (5.72)	.060 (1.52)	-	.100 (2.54)	.045 (1.14)	.420 (10.67)	.120 (3.05)	.060 (1.52)	.100 (2.54)	-	.50

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Ceramic.
- Termination finish:
 - For RoHS Case Styles: Tin plate over Nickel plate.
 - For RoHS-5 Case Styles: Tin-Lead plate.

Tape & Reel Packaging TR-F5

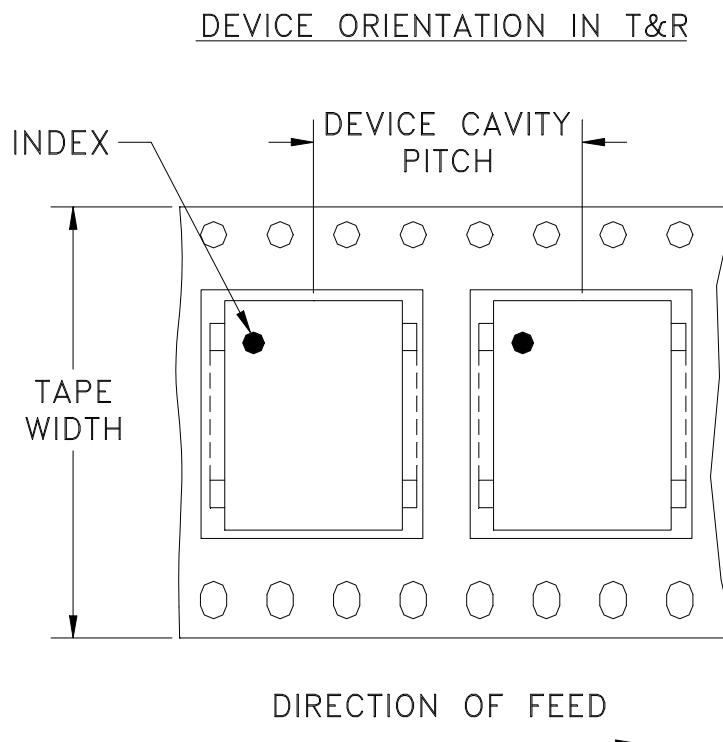

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
32	16	13	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/02/02	AV	DJ
A	M102713	UPDATED NOTES	01/14/06	GF	IL

SUGGESTED MOUNTING CONFIGURATION FOR QQQ569 CASE STYLE, "w" PIN CONNECTION

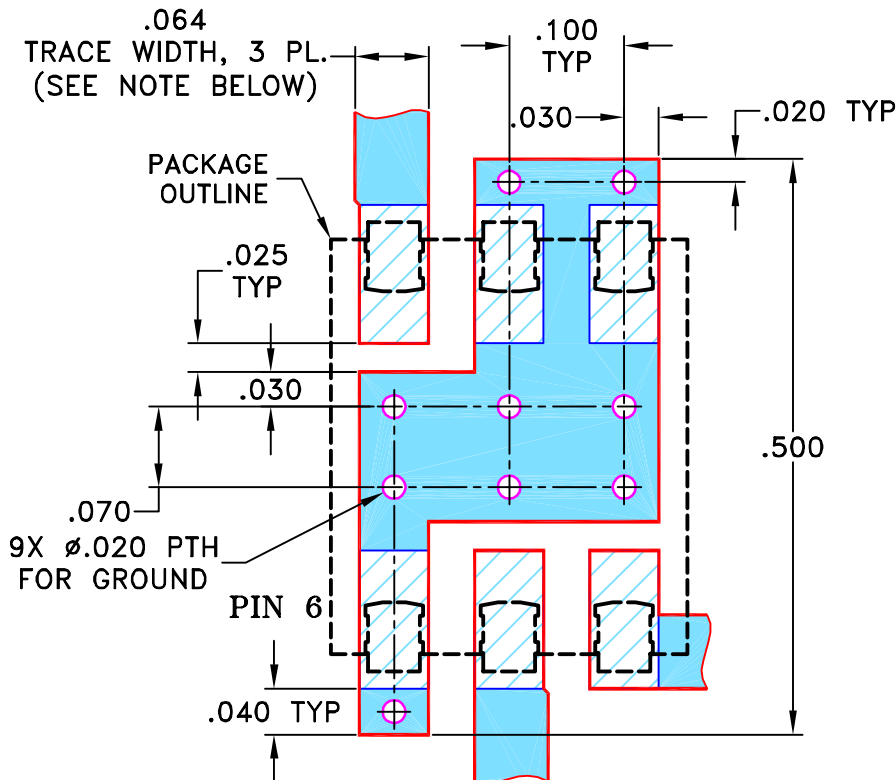

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" $\pm$ 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

07/19/02

TOLERANCES ON:

CHECKED

WL

08/02/02

2 PL DECIMALS $\pm$

APPROVED

DJ

08/02/02

3 PL DECIMALS $\pm$.005

ANGLES $\pm$

FRACTIONS $\pm$

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, w, QQQ569, LRMS-J, TB-44

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-083

REV:

A

FILE: 98PL083


SCALE:

6:1


SHEET:

1 OF 1

Evaluation Board and Circuit

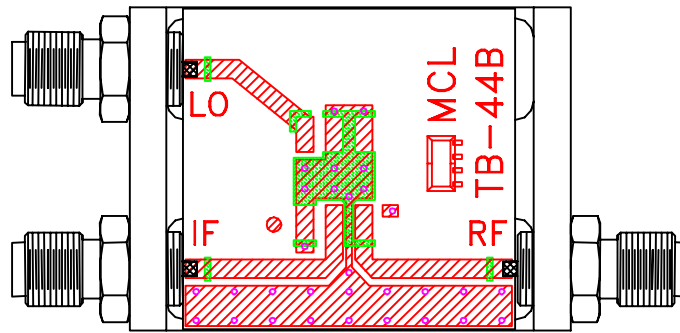

TB-44+

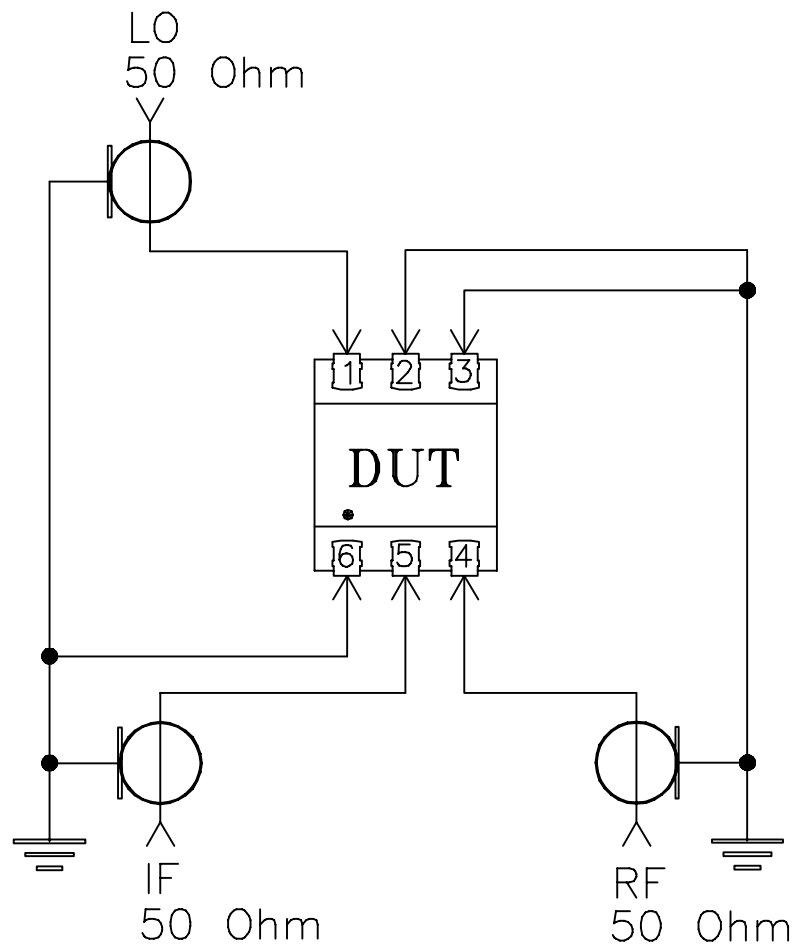

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®