

Non-Catalog Model

Frequency Mixer

LRMS-5MHJ

Level 13 (LO Power +13 dBm)

Important Note

This is a non-catalog model and can be manufactured on specific request.
Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : QQQ569

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	10		1500	MHz
	RF (fL to fU)	10		1500	MHz
	IF	0		900	MHz
Conversion Loss	mid band		5.7	9.0	dB
	Total Range			9.5	dB
LO-RF Isolation	Low Range	40	58		dB
	Mid Range	20	40		dB
	Upper Range	18	26		dB
LO-IF Isolation	Low Range	30	50		dB
	Mid Range	18	38		dB
	Upper Range	8	17		dB
1 dB Comp. Input Power			+9		dBm

Notes: Low Range = [fL to 10fL]
mid band = [2fL to fU/2]

Mid Range = [10fL to fU/2]


Upper Range = [fU/2 to fU]

Phase detection, positive polarity
Aqueous washable.

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA

PIN CONNECTIONS	
LO	1
RF	4
IF	5
GROUND	2, 3, 6

Electrical Schematics

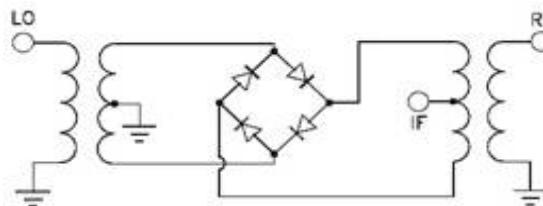

Frequency Mixer

LRMS-5MHJ

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	6.71	6.19	5.96
70.4	100.4	6.23	5.76	5.52
130.7	160.7	6.00	5.58	5.41
191.0	221.0	5.97	5.59	5.41
231.2	261.2	6.02	5.63	5.45
291.5	321.5	6.05	5.66	5.47
331.7	361.7	6.12	5.73	5.53
392.0	422.0	6.17	5.81	5.58
432.2	462.2	6.29	5.85	5.61
492.5	522.5	6.35	5.93	5.66
532.7	562.7	6.46	6.03	5.77
593.0	623.0	6.61	6.08	5.80
633.2	663.2	6.75	6.18	5.81
693.5	723.5	6.90	6.31	5.92
733.7	763.7	7.14	6.50	6.08
794.0	824.0	7.36	6.65	6.20
834.2	864.2	7.53	6.70	6.24
894.5	924.5	7.85	6.82	6.30
934.7	964.7	8.22	7.10	6.48
995.0	1025.0	8.41	7.57	6.84
1035.3	1065.3	8.43	7.78	7.14
1095.6	1125.6	8.43	7.98	7.52
1135.8	1165.8	8.38	8.02	7.66
1196.1	1226.1	8.37	8.09	7.81
1236.3	1266.3	8.39	8.10	7.87
1296.6	1326.6	8.49	8.19	7.97
1336.8	1366.8	8.53	8.26	8.06
1397.1	1427.1	8.70	8.40	8.21
1437.3	1467.3	8.78	8.42	8.24
1497.6	1527.6	8.89	8.41	8.23
1537.8	1567.8	8.96	8.43	8.23
1598.1	1628.1	9.16	8.48	8.29
1638.3	1668.3	9.30	8.50	8.31
1698.6	1728.6	9.51	8.58	8.38
1738.8	1768.8	9.73	8.61	8.38
1799.1	1829.1	10.34	8.73	8.42
1839.3	1869.3	11.02	8.89	8.48
1899.6	1929.6	11.84	9.14	8.57
1939.8	1969.8	13.17	9.55	8.66
2000.1	2030.1	14.33	10.07	9.03

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	19.09	21.27	23.62
70.4	100.4	20.70	23.89	21.16
130.7	160.7	20.55	18.27	20.39
191.0	221.0	16.93	18.23	20.93
231.2	261.2	16.28	18.30	21.47
291.5	321.5	15.93	18.61	22.13
331.7	361.7	16.16	19.39	22.92
392.0	422.0	17.03	20.32	25.56
432.2	462.2	16.43	20.96	26.31
492.5	522.5	17.19	19.80	24.83
532.7	562.7	18.04	20.63	23.92
593.0	623.0	17.54	24.23	25.68
633.2	663.2	15.91	21.90	24.34
693.5	723.5	16.23	19.95	25.59
733.7	763.7	17.00	20.40	21.86
794.0	824.0	17.73	19.08	18.78
834.2	864.2	16.65	18.93	21.43
894.5	924.5	15.88	20.29	25.67
934.7	964.7	15.19	19.17	24.48
995.0	1025.0	15.40	18.86	22.50
1035.3	1065.3	15.73	17.22	22.81
1095.6	1125.6	17.20	15.84	18.72
1135.8	1165.8	19.02	16.12	17.21
1196.1	1226.1	24.86	18.06	15.74
1236.3	1266.3	24.73	19.64	16.06
1296.6	1326.6	21.05	19.20	16.96
1336.8	1366.8	20.45	18.40	16.60
1397.1	1427.1	19.14	18.14	17.89
1437.3	1467.3	18.57	19.69	19.12
1497.6	1527.6	18.23	20.43	21.42
1537.8	1567.8	17.86	19.35	20.06
1598.1	1628.1	18.04	20.10	20.84
1638.3	1668.3	18.09	20.51	22.98
1698.6	1728.6	16.70	20.94	22.67
1738.8	1768.8	16.40	20.59	21.73
1799.1	1829.1	16.52	19.74	22.45
1839.3	1869.3	17.58	19.03	23.20
1899.6	1929.6	19.00	19.07	22.34
1939.8	1969.8	14.77	20.23	19.31
2000.1	2030.1	12.21	24.07	19.49

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+9dBm (dB)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	0.98	0.77	0.64
70.4	100.4	1.33	1.09	0.90
130.7	160.7	1.47	1.16	0.97
191.0	221.0	1.49	1.18	0.99
231.2	261.2	1.49	1.18	1.01
291.5	321.5	1.49	1.19	1.02
331.7	361.7	1.52	1.24	1.07
392.0	422.0	1.60	1.30	1.16
432.2	462.2	1.71	1.44	1.26
492.5	522.5	1.82	1.55	1.35
532.7	562.7	1.92	1.61	1.45
593.0	623.0	2.00	1.78	1.59
633.2	663.2	2.06	1.89	1.72
693.5	723.5	2.22	1.97	1.82
733.7	763.7	2.12	1.90	1.76
794.0	824.0	2.12	1.88	1.77
834.2	864.2	2.05	1.92	1.78
894.5	924.5	1.88	1.98	1.80
934.7	964.7	1.52	1.78	1.69
995.0	1025.0	1.25	1.37	1.44
1035.3	1065.3	1.13	1.10	1.17
1095.6	1125.6	1.06	0.89	0.87
1135.8	1165.8	0.98	0.76	0.72
1196.1	1226.1	0.92	0.63	0.56
1236.3	1266.3	0.86	0.54	0.48
1296.6	1326.6	0.90	0.51	0.46
1336.8	1366.8	0.90	0.53	0.46
1397.1	1427.1	1.04	0.59	0.48
1437.3	1467.3	1.01	0.58	0.48
1497.6	1527.6	1.02	0.63	0.46
1537.8	1567.8	1.08	0.65	0.45
1598.1	1628.1	1.14	0.62	0.38
1638.3	1668.3	1.10	0.57	0.35
1698.6	1728.6	1.16	0.56	0.33
1738.8	1768.8	1.17	0.58	0.33
1799.1	1829.1	0.95	0.61	0.33
1839.3	1869.3	0.64	0.66	0.34
1899.6	1929.6	0.25	0.63	0.34
1939.8	1969.8	-0.55	0.60	0.38
2000.1	2030.1	-1.23	0.38	0.27

Frequency Mixer

LRMS-5MHJ

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=750.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=1500.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+13			+13			+13
730.0	20.1	6.37	10.0	20.1	6.37	900.0	600.1	9.29
711.5	38.6	6.32	29.8	39.9	6.18	879.3	620.8	9.21
693.1	57.0	6.33	49.6	59.7	6.33	858.6	641.5	9.16
674.6	75.5	6.39	69.3	79.4	6.38	837.9	662.2	9.12
656.2	93.9	6.36	89.1	99.2	6.33	817.2	682.9	9.07
637.7	112.4	6.33	108.9	119.0	6.29	796.5	703.6	9.09
619.2	130.9	6.32	128.7	138.8	6.26	775.8	724.3	9.03
600.8	149.3	6.34	148.4	158.5	6.26	755.1	745.0	9.02
582.3	167.8	6.36	168.2	178.3	6.26	734.4	765.7	8.87
563.8	186.3	6.38	188.0	198.1	6.29	713.7	786.4	8.86
545.4	204.7	6.39	207.8	217.9	6.24	693.0	807.1	8.87
526.9	223.2	6.38	227.6	237.7	6.22	672.3	827.8	8.80
508.5	241.6	6.38	247.3	257.4	6.28	651.6	848.5	8.77
490.0	260.1	6.41	267.1	277.2	6.31	630.9	869.2	8.74
471.5	278.6	6.39	286.9	297.0	6.28	610.2	889.9	8.66
453.1	297.0	6.38	306.7	316.8	6.27	589.5	910.6	8.63
434.6	315.5	6.38	326.4	336.5	6.33	568.8	931.3	8.58
416.2	333.9	6.34	346.2	356.3	6.30	548.1	952.0	8.55
397.7	352.4	6.31	366.0	376.1	6.37	527.4	972.7	8.52
379.2	370.9	6.23	385.8	395.9	6.36	506.7	993.4	8.47
360.8	389.3	6.29	405.6	415.7	6.33	486.0	1014.1	8.49
342.3	407.8	6.27	425.3	435.4	6.39	465.3	1034.8	8.45
323.8	426.3	6.29	445.1	455.2	6.39	444.7	1055.4	8.48
305.4	444.7	6.29	464.9	475.0	6.44	424.0	1076.1	8.47
286.9	463.2	6.34	484.7	494.8	6.41	403.3	1096.8	8.46
268.5	481.6	6.33	504.4	514.5	6.42	382.6	1117.5	8.45
250.0	500.1	6.35	524.2	534.3	6.43	361.9	1138.2	8.46
231.5	518.6	6.34	544.0	554.1	6.45	341.2	1158.9	8.48
213.1	537.0	6.38	563.6	573.7	6.41	320.5	1179.6	8.48
194.6	555.5	6.37	603.3	613.4	6.44	299.8	1200.3	8.53
176.2	573.9	6.37	642.9	653.0	6.48	279.1	1221.0	8.53
157.7	592.4	6.37	662.7	672.8	6.50	258.4	1241.7	8.59
139.2	610.9	6.34	702.2	712.3	6.53	217.0	1283.1	8.64
120.8	629.3	6.34	722.0	732.1	6.60	196.3	1303.8	8.64
102.3	647.8	6.36	761.6	771.7	6.65	154.9	1345.2	8.69
83.8	666.3	6.44	781.3	791.4	6.70	134.2	1365.9	8.75
65.4	684.7	6.43	820.9	831.0	6.75	92.8	1407.3	8.76
46.9	703.2	6.48	840.7	850.8	6.81	72.1	1428.0	8.74
28.5	721.6	6.47	880.2	890.3	6.89	30.7	1469.4	8.67
10.0	740.1	6.66	900.0	910.1	6.91	10.0	1490.1	8.69

REV. X2
LRMS-5MHJ
100817
Page 2 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

LRMS-5MHJ

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+10	+13	+16	+10	+13	+16
10.1	80.50	81.54	80.03	64.42	76.65	71.70
70.4	63.53	68.78	76.05	46.57	55.87	57.29
130.7	56.66	61.62	70.74	42.16	52.68	50.63
191.0	52.05	56.84	63.95	38.42	47.13	49.62
231.2	50.97	56.70	64.77	37.62	47.65	46.00
291.5	48.92	54.04	61.40	35.43	45.04	45.07
331.7	48.66	54.70	63.84	34.98	46.46	42.70
392.0	48.13	54.63	67.51	33.98	46.36	41.28
432.2	48.01	55.37	69.04	34.10	48.70	38.16
492.5	47.88	57.85	62.02	33.79	50.53	36.77
532.7	48.24	59.06	58.77	34.61	49.57	35.01
593.0	48.72	63.95	51.92	35.33	43.82	32.98
633.2	49.22	57.97	48.49	36.41	39.65	30.90
693.5	49.16	55.74	46.71	38.37	36.59	28.93
733.7	49.16	55.18	45.50	41.64	35.14	27.85
794.0	49.01	54.92	45.32	47.08	32.82	26.97
834.2	49.43	55.27	45.46	40.76	30.63	26.08
894.5	48.53	57.01	46.72	33.34	27.09	23.92
934.7	47.20	60.75	47.28	31.36	25.20	22.51
995.0	44.67	64.89	50.73	29.36	23.38	20.81
1035.3	43.62	55.58	54.39	27.98	22.37	19.87
1095.6	42.01	49.05	68.95	25.92	21.43	18.76
1135.8	41.31	47.24	59.03	24.44	20.61	18.23
1196.1	40.20	44.95	51.56	22.84	19.64	17.44
1236.3	39.23	43.48	48.62	22.08	19.11	17.03
1296.6	37.57	41.04	45.51	21.16	18.50	16.52
1336.8	36.50	39.45	43.01	20.57	17.98	16.20
1397.1	35.15	37.63	40.28	19.67	17.51	15.85
1437.3	34.81	37.19	39.59	18.95	16.96	15.42
1497.6	34.00	36.26	38.37	17.97	16.31	14.79
1537.8	33.77	36.15	38.20	17.18	15.74	14.26
1598.1	32.91	35.14	36.90	16.34	15.10	13.82
1638.3	32.21	34.37	35.78	15.80	14.65	13.51
1698.6	30.82	32.92	34.34	15.11	14.31	13.37
1738.8	30.30	32.39	33.79	14.54	14.03	13.19
1799.1	29.07	30.99	32.60	14.01	13.74	13.12
1839.3	28.83	30.68	32.28	13.79	13.59	12.94
1899.6	27.80	29.44	31.03	13.35	13.39	12.90
1939.8	27.45	28.96	30.39	13.27	13.14	12.68
2000.1	26.62	27.96	29.25	13.09	13.12	12.72

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+10	+13	+16
10.1	40.1	49.39	49.96	52.62
70.4	100.4	39.78	39.13	38.59
130.7	160.7	35.45	34.74	34.52
191.0	221.0	33.54	32.73	32.19
231.2	261.2	32.52	31.92	31.63
291.5	321.5	31.83	31.18	30.75
331.7	361.7	31.41	30.72	30.26
392.0	422.0	29.87	29.48	29.13
432.2	462.2	28.76	28.54	28.26
492.5	522.5	26.96	26.76	26.48
532.7	562.7	25.50	25.35	25.11
593.0	623.0	23.58	23.39	23.27
633.2	663.2	22.29	22.18	22.00
693.5	723.5	21.00	20.90	20.88
733.7	763.7	20.40	20.29	20.15
794.0	824.0	19.82	19.74	19.68
834.2	864.2	19.71	19.71	19.78
894.5	924.5	19.52	19.96	20.20
934.7	964.7	19.11	19.79	20.21
995.0	1025.0	18.38	19.12	19.87
1035.3	1065.3	17.81	18.56	19.25
1095.6	1125.6	17.14	17.76	18.42
1135.8	1165.8	16.80	17.34	17.86
1196.1	1226.1	16.47	16.89	17.30
1236.3	1266.3	16.26	16.65	17.02
1296.6	1326.6	15.88	16.24	16.57
1336.8	1366.8	15.66	16.00	16.34
1397.1	1427.1	15.29	15.65	16.08
1437.3	1467.3	15.20	15.60	16.00
1497.6	1527.6	15.14	15.63	16.07
1537.8	1567.8	15.19	15.65	16.09
1598.1	1628.1	15.17	15.69	16.09
1638.3	1668.3	15.19	15.74	16.12
1698.6	1728.6	15.03	15.73	16.15
1738.8	1768.8	14.84	15.63	16.04
1799.1	1829.1	14.61	15.45	15.99
1839.3	1869.3	14.40	15.24	15.85
1899.6	1929.6	14.19	15.01	15.61
1939.8	1969.8	14.11	14.90	15.39
2000.1	2030.1	14.14	14.96	15.38

Frequency Mixer

LRMS-5MHJ

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=1500.1MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+10	+13	+16		+10	+13	+16		+10	+13	+16
10.1	40.1	1.65	1.62	1.62	10.1	1.56	2.27	3.26	10.0	1.55	1.31	1.13
70.4	100.4	1.21	1.13	1.14	70.4	1.56	2.32	3.33	29.8	1.44	1.22	1.05
130.7	160.7	1.16	1.06	1.07	130.7	1.59	2.41	3.49	49.6	1.38	1.17	1.03
191.0	221.0	1.15	1.04	1.02	191.0	1.53	2.26	3.21	69.3	1.38	1.17	1.01
231.2	261.2	1.17	1.06	1.02	231.2	1.60	2.40	3.43	89.1	1.41	1.19	1.03
291.5	321.5	1.17	1.08	1.05	291.5	1.59	2.33	3.26	108.9	1.43	1.22	1.03
331.7	361.7	1.19	1.11	1.08	331.7	1.66	2.44	3.41	128.7	1.44	1.22	1.05
392.0	422.0	1.21	1.15	1.13	392.0	1.67	2.41	3.31	148.4	1.42	1.20	1.03
432.2	462.2	1.26	1.19	1.16	432.2	1.76	2.51	3.42	168.2	1.39	1.17	1.01
492.5	522.5	1.30	1.24	1.21	492.5	1.80	2.52	3.37	188.0	1.39	1.17	1.01
532.7	562.7	1.34	1.29	1.26	532.7	1.88	2.59	3.44	207.8	1.41	1.18	1.00
593.0	623.0	1.44	1.38	1.34	593.0	1.94	2.62	3.43	227.6	1.41	1.18	1.01
633.2	663.2	1.55	1.47	1.42	633.2	2.02	2.69	3.47	247.3	1.41	1.18	1.00
693.5	723.5	1.70	1.62	1.56	693.5	2.08	2.74	3.50	267.1	1.43	1.20	1.02
733.7	763.7	1.84	1.74	1.68	733.7	2.15	2.78	3.52	286.9	1.43	1.20	1.02
794.0	824.0	2.05	1.95	1.86	794.0	2.23	2.82	3.52	306.7	1.40	1.17	1.04
834.2	864.2	2.20	2.07	1.98	834.2	2.30	2.85	3.51	326.4	1.38	1.15	1.05
894.5	924.5	2.43	2.26	2.15	894.5	2.41	2.91	3.51	346.2	1.38	1.15	1.03
934.7	964.7	2.60	2.42	2.30	934.7	2.49	2.98	3.54	366.0	1.40	1.16	1.03
995.0	1025.0	2.77	2.66	2.53	995.0	2.57	3.07	3.60	385.8	1.40	1.16	1.03
1035.3	1065.3	2.83	2.77	2.67	1035.3	2.63	3.13	3.66	405.6	1.40	1.16	1.04
1095.6	1125.6	2.86	2.85	2.80	1095.6	2.68	3.14	3.65	425.3	1.37	1.13	1.06
1135.8	1165.8	2.87	2.87	2.85	1135.8	2.74	3.17	3.67	445.1	1.34	1.11	1.09
1196.1	1226.1	2.87	2.87	2.86	1196.1	2.78	3.17	3.62	464.9	1.37	1.13	1.08
1236.3	1266.3	2.89	2.88	2.86	1236.3	2.84	3.20	3.65	484.7	1.41	1.17	1.05
1296.6	1326.6	2.95	2.93	2.90	1296.6	2.92	3.20	3.62	504.4	1.41	1.16	1.04
1336.8	1366.8	3.00	2.97	2.94	1336.8	2.99	3.24	3.64	524.2	1.37	1.13	1.07
1397.1	1427.1	3.06	3.02	2.98	1397.1	3.08	3.25	3.60	544.0	1.35	1.11	1.09
1437.3	1467.3	3.10	3.04	2.99	1437.3	3.17	3.30	3.62	583.6	1.40	1.15	1.09
1497.6	1527.6	3.14	3.05	3.01	1497.6	3.27	3.30	3.58	603.3	1.42	1.16	1.05
1537.8	1567.8	3.15	3.05	3.00	1537.8	3.36	3.34	3.60	642.9	1.37	1.12	1.08
1598.1	1628.1	3.17	3.05	3.00	1598.1	3.53	3.38	3.59	662.7	1.35	1.10	1.11
1638.3	1668.3	3.20	3.05	2.99	1638.3	3.68	3.49	3.67	702.2	1.42	1.15	1.06
1698.6	1728.6	3.26	3.08	3.01	1698.6	4.03	3.66	3.76	722.0	1.42	1.15	1.06
1738.8	1768.8	3.33	3.11	3.03	1738.8	4.25	3.82	3.88	761.6	1.39	1.12	1.08
1799.1	1829.1	3.48	3.17	3.06	1799.1	4.78	4.07	4.01	781.3	1.38	1.12	1.09
1839.3	1869.3	3.61	3.22	3.09	1839.3	5.00	4.25	4.14	820.9	1.40	1.13	1.08
1899.6	1929.6	3.80	3.32	3.15	1899.6	5.58	4.57	4.29	840.7	1.41	1.13	1.08
1939.8	1969.8	3.99	3.42	3.21	1939.8	5.74	4.73	4.42	880.2	1.38	1.11	1.12
2000.1	2030.1	4.16	3.54	3.34	2000.1	6.26	5.10	4.60	900.0	1.37	1.11	1.14

REV. X2
LRMS-5MHJ
100817
Page 4 of 5

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	12	29	23	34	22	53	43	60	42	58
1	-	14	+0	36	19	38	47	51	43	57	52	60
2	82	45	28	45	27	56	44	62	38	54	55	66
3	>100	39	39	43	48	47	52	49	48	61	52	64
4	>100	58	60	53	64	54	48	59	55	52	67	61
5	>100	61	51	54	55	62	48	63	60	81	65	65
6	>100	87	79	64	69	71	50	67	49	66	60	73
7	>100	84	70	77	64	78	63	67	64	75	70	84
8	>100	96	91	87	85	75	81	69	67	67	67	77
9	>100	>97	89	95	79	81	76	81	74	73	77	74
10	>100	93	92	>97	94	94	84	75	89	84	66	77
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 750.1 MHz; 4.00 dBm.
LO IN: 780.01 MHz; +13.00 dBm
IF OUT: 29.91 MHz; -2.58 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	7	19	11	21	8	36	36	44	32	39
1	-	13	+0	34	18	32	38	44	34	47	42	51
2	96	53	38	52	36	59	52	52	50	54	57	62
3	>100	64	58	60	53	61	63	70	58	76	64	74
4	>100	82	>87	>87	73	66	69	76	74	82	76	77
5	>100	80	>87	83	87	81	70	80	>87	>87	87	86
6	>100	>87	87	>87	78	>87	80	68	80	>87	82	>87
7	>100	>87	>87	85	85	87	>87	86	78	>87	>87	87
8	>100	>87	86	87	84	>87	>87	>87	79	78	>87	>87
9	>100	78	82	81	83	>87	>87	>87	>87	>87	79	>87
10	>100	84	79	>87	>87	80	>87	82	86	>87	78	77
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 750.1 MHz; -6.00 dBm.
LO IN: 780.01 MHz; +13.00 dBm
IF OUT: 29.91 MHz; -12.62 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
LRMS-5MHJ
100817
Page 5 of 5



Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see




Frequency Mixer


LRMS-5MHJ

Typical Performance Curves


Conversion Loss @ IF=30MHz

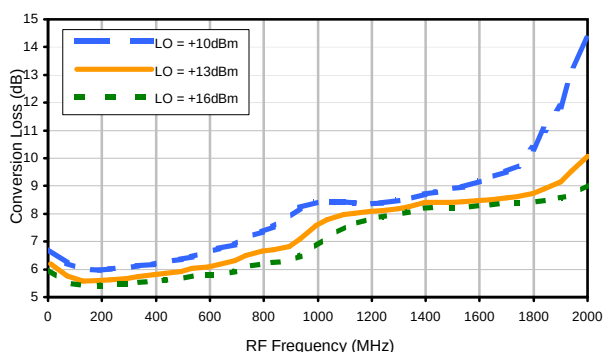


Conversion Loss vs. IF @ RF=750.1MHz

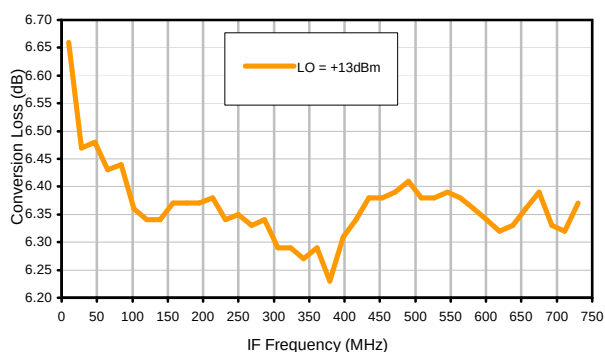


Conversion Loss vs. IF @ RF=10.1MHz

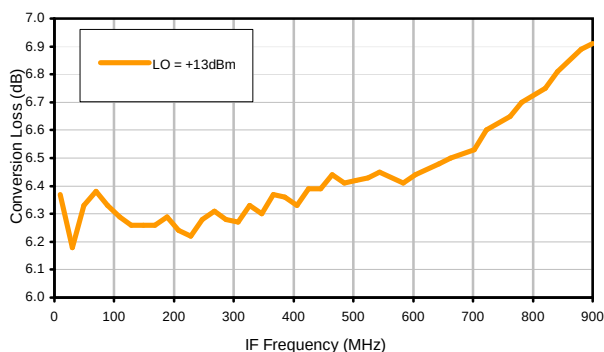


Conversion Loss vs. IF @ RF=1500.1MHz

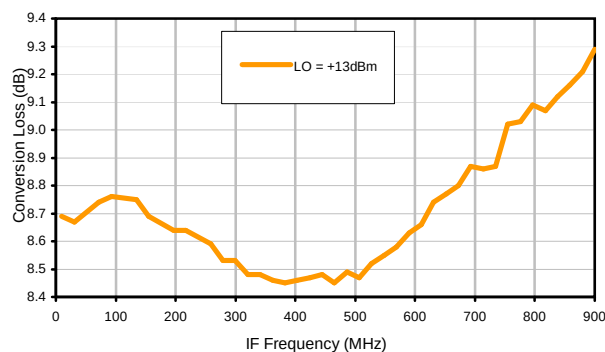

IP3 Input

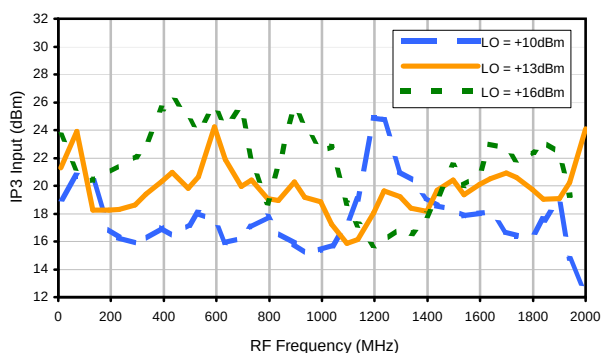

Compression @ RF IN=+9dBm

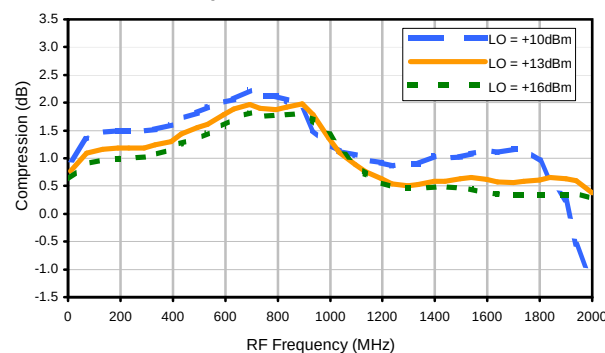


Frequency Mixer


LRMS-5MHJ

Typical Performance Curves


LO-RF Isolation

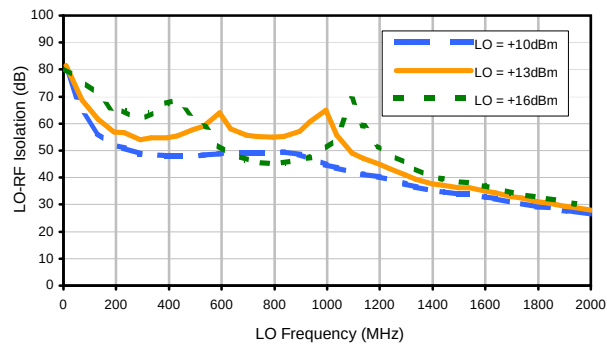


LO-IF Isolation

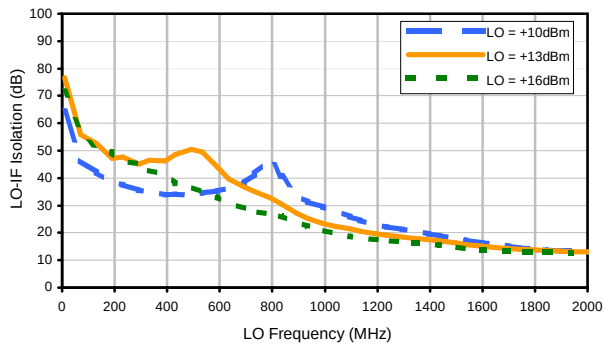


RF-IF Isolation

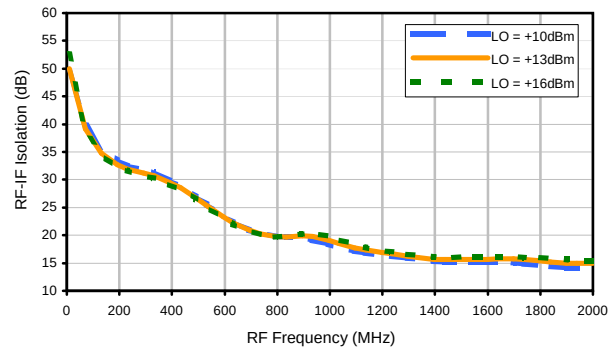


RF VSWR

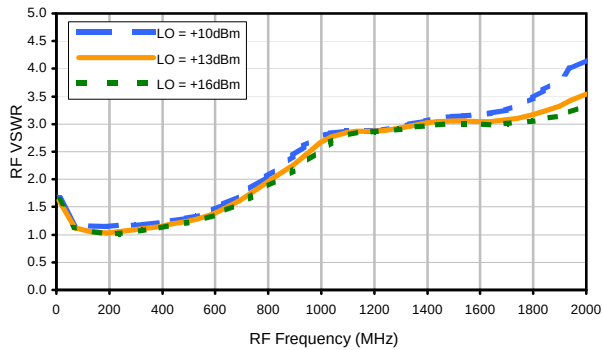

LO VSWR

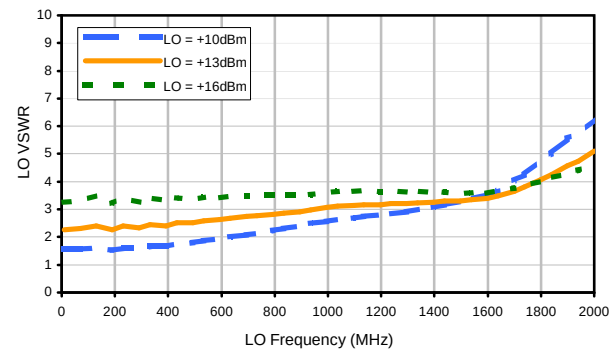

IF VSWR

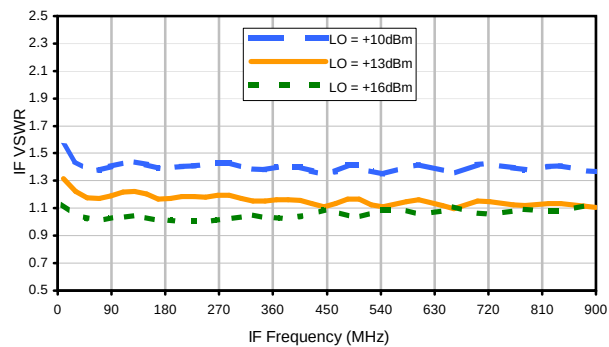

REV. X2
LRMS-5MHJ
100817
Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	12	29	23	34	22	53	43	60	42	58
1	-	14	+0	36	19	38	47	51	43	57	52	60
2	82	45	28	45	27	56	44	62	38	54	55	66
3	>100	39	39	43	48	47	52	49	48	61	52	64
4	>100	58	60	53	64	54	48	59	55	52	67	61
5	>100	61	51	54	55	62	48	63	60	81	65	65
6	>100	87	79	64	69	71	50	67	49	66	60	73
7	>100	84	70	77	64	78	63	67	64	75	70	84
8	>100	96	91	87	85	75	81	69	67	67	67	77
9	>100	>97	89	95	79	81	76	81	74	73	77	74
10	>100	93	92	>97	94	94	84	75	89	84	66	77
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 750.1 MHz; 4.00 dBm.
LO IN: 780.01 MHz; +13.00 dBm
IF OUT: 29.91 MHz; -2.58 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	7	19	11	21	8	36	36	44	32	39
1	-	13	+0	34	18	32	38	44	34	47	42	51
2	96	53	38	52	36	59	52	52	50	54	57	62
3	>100	64	58	60	53	61	63	70	58	76	64	74
4	>100	82	>87	>87	73	66	69	76	74	82	76	77
5	>100	80	>87	83	87	81	70	80	>87	>87	87	86
6	>100	>87	87	>87	78	>87	80	68	80	>87	82	>87
7	>100	>87	>87	85	85	87	>87	86	78	>87	>87	87
8	>100	>87	86	87	84	>87	>87	>87	79	78	>87	>87
9	>100	78	82	81	83	>87	>87	>87	>87	>87	79	>87
10	>100	84	79	>87	>87	80	>87	82	86	>87	78	77
RF CAL	0	1	2	3	4	5	6	7	8	9	10	

LO HARMONICS ORDER

Test conditions: RF IN: 750.1 MHz; -6.00 dBm.
LO IN: 780.01 MHz; +13.00 dBm
IF OUT: 29.91 MHz; -12.62 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
LRMS-5MHJ
100817
Page 3 of 3




Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Outline Dimensions

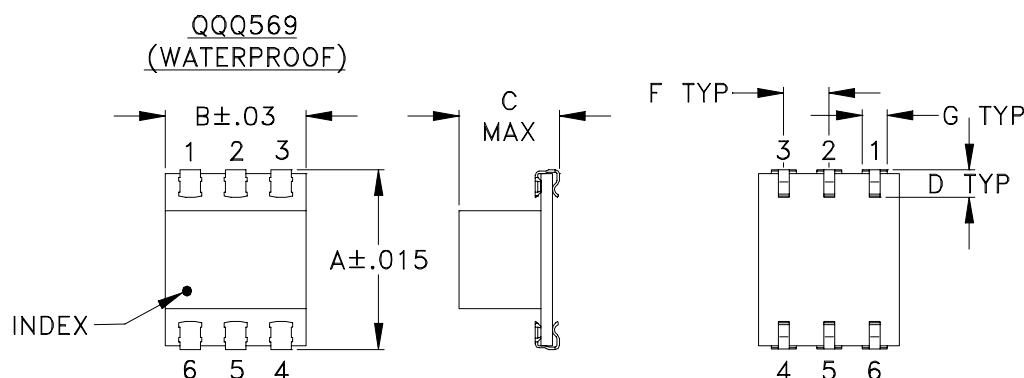

PCB Land Pattern

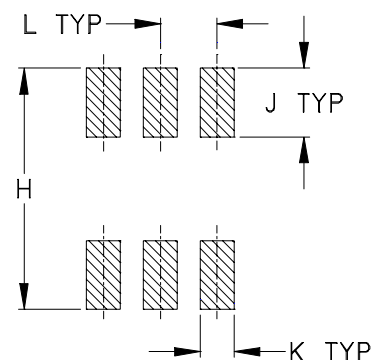

Suggested Layout,
Tolerance to be within $\pm .002$


CASE#	A	B	C	D	E	F	G	H	J	K	L	M	WT, GRAM
QQQ569	.390 (9.90)	.31 (7.87)	.225 (5.72)	.060 (1.52)	-	.100 (2.54)	.045 (1.14)	.420 (10.67)	.120 (3.05)	.060 (1.52)	.100 (2.54)	-	.50

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Ceramic.
- Termination finish:
 - For RoHS Case Styles: Tin plate over Nickel plate.
 - For RoHS-5 Case Styles: Tin-Lead plate.

Tape & Reel Packaging TR-F5

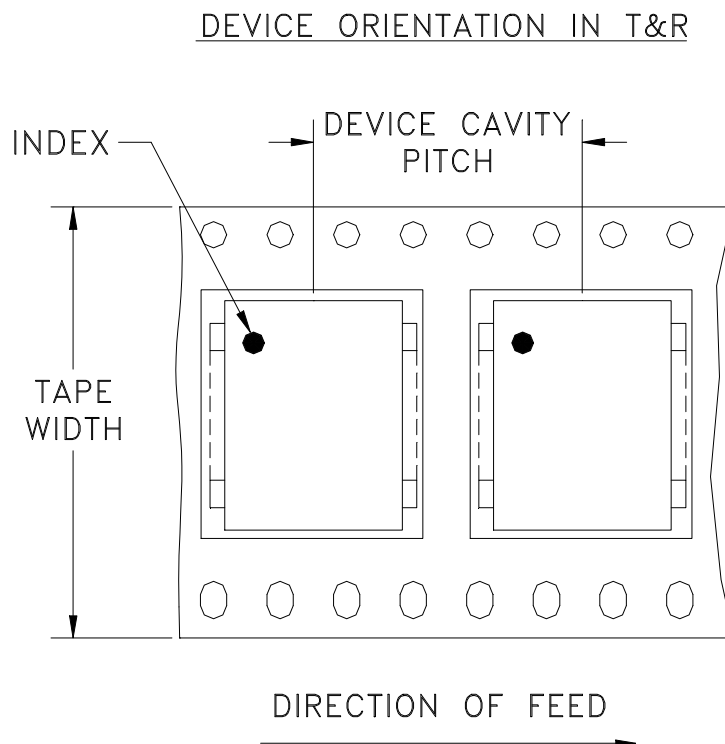

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
32	16	13	500

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M82272	NEW RELEASE	08/02/02	AV	DJ
A	M102713	UPDATED NOTES	01/14/06	GF	IL

SUGGESTED MOUNTING CONFIGURATION FOR QQQ569 CASE STYLE, "w" PIN CONNECTION

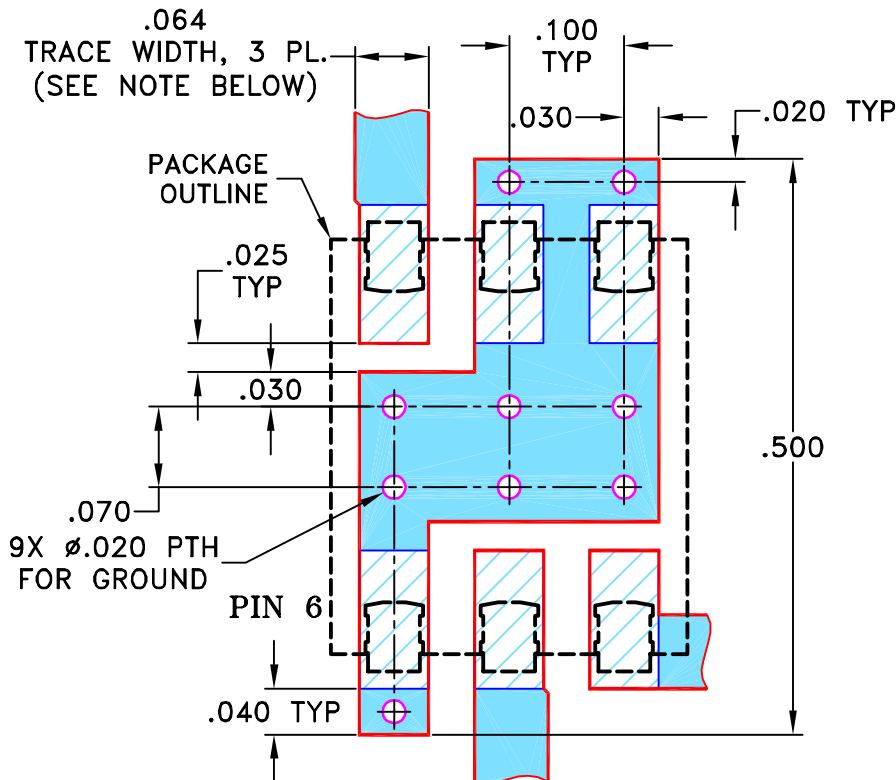

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" $\pm$ 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

07/19/02

TOLERANCES ON:

CHECKED

WL

08/02/02

2 PL DECIMALS $\pm$.005

APPROVED

DJ

08/02/02

ANGLES $\pm$

FRACTIONS $\pm$

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, w, QQQ569, LRMS-J, TB-44

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-083

REV:

A

FILE: 98PL083


SCALE:

6:1


SHEET:

1 OF 1

Evaluation Board and Circuit

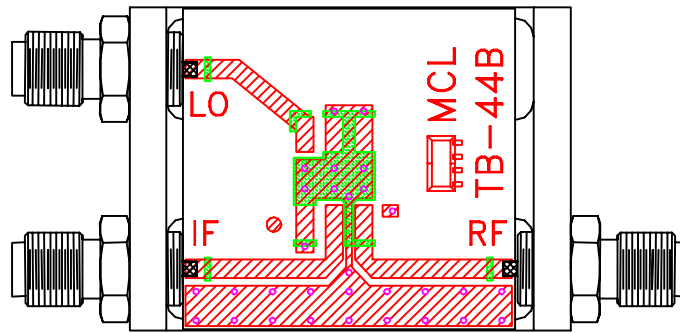


TB-44+

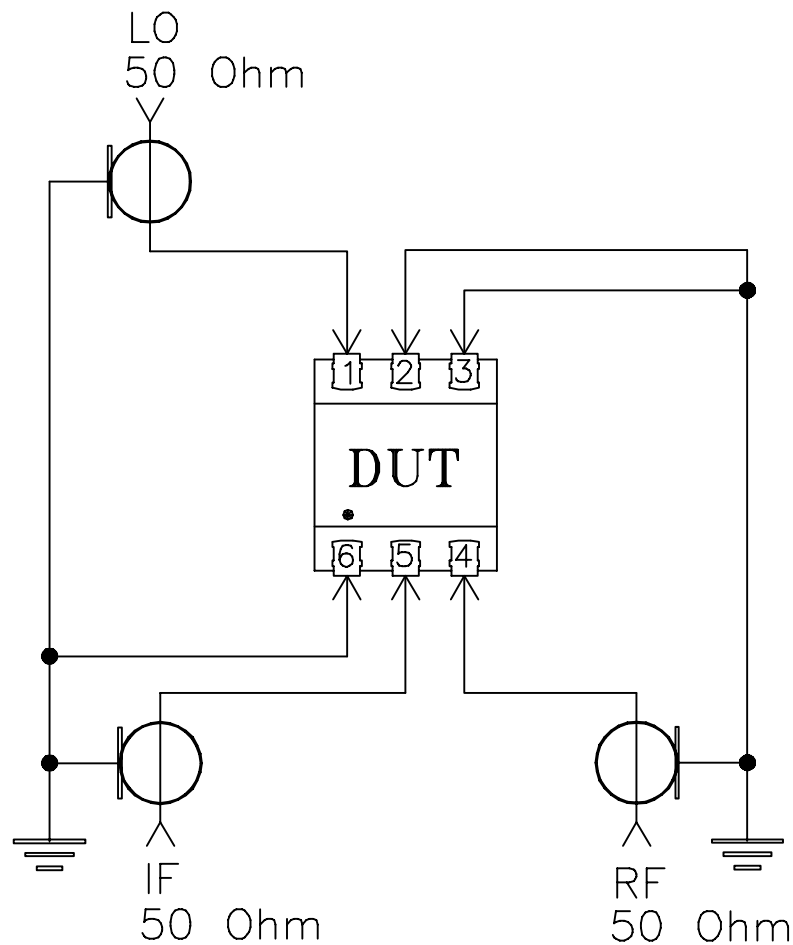

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®