

USB / Ethernet

Programmable Attenuator

50Ω 0 – 95 dB, 0.25 dB step 1 to 6000 MHz

RC4DAT-6G-95

The Big Deal

- Four independently programmable channels
- Wide attenuation range, 95 dB
- Fine attenuation resolution, 0.25 dB
- Short attenuation transition time (650 ns)
- **USB and Ethernet control**

Applications

- MIMO test sets
- Automated Test Equipment (ATE)
- WiMAX, 4G, 5G, LTE, DVB Fading Simulators
- Handover system Evaluation
- Power level cycling



Software Package Case Style: QE2249

Included Accessories

Model No.	Description	Qty.
MUSB-CBL-3+	2.6 ft. USB cable	1

RoHS Compliant

See our web site for RoHS Compliance methodologies and qualifications

Product Overview

Mini-Circuits' RC4DAT-6G-95 is a 4-channel programmable attenuator suitable for a wide range of signal level control applications from 1 MHz to 6 GHz. Each independently controlled channel provides 0 to 95 dB attenuation in 0.25 dB steps with more than 100 dB isolation between channels. Its unique design maintains linear attenuation change per dB, even at the highest attenuation settings.

All 4 bi-directional RF channels are housed in a single, compact and rugged package with SMA female connectors on all RF ports, a standard Ethernet port (RJ45) and a USB type Mini-B power and control port.

The attenuator can be controlled via USB or Ethernet (supporting HTTP, Telnet and SSH network protocols). Full software support is provided and can be downloaded from our website any time at <http://www.minicircuits.com/softwaredownload/patt.html>. The package includes our user-friendly GUI application for Windows® and a full API with programming instructions for Windows® and Linux® environments (both 32-bit and 64-bit systems).

Key Features

Feature	Advantages
USB & Ethernet control	USB HID and Ethernet (HTTP / Telnet / SSH) interfaces provide easy compatibility with a wide range of software setups and programming environments. The device draws all power requirements through the USB port.
Programmable attenuation sweep and Hop sequences	The RC4DAT-6G-95 can be programmed with a timed sequence of attenuation settings, to run without any additional external control
95 dB attenuation range.	The RC4DAT-6G-95 provides high-accuracy attenuation up to 95 dB, allowing the user precise level control over a broad attenuation and frequency range.
High linearity	Typical input IP3 of +54 dBm up to 6000 MHz

Trademarks: Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Linux is a registered trademark of Linus Torvalds. Mac is a registered trademark of Apple Corporation. SSH is a registered trademark of SSH Communications Security Corp. Pentium is a registered trademark of Intel Corporation. Neither Mini-Circuits nor the Mini-Circuits RC4DAT-series attenuators are affiliated with or endorsed by the owners of the above referenced trademarks.

Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation.

Rev. G
ECO-011494
EDR-11482
RC4DAT-6G-95
MCIL
220224
Page 1 of 9

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Electrical Specifications ^{1,2} at 0°C to 50°C

Parameter	Frequency range	Conditions	Min.	Typ.	Max.	Units
Attenuation range	1 - 6000 MHz	0.25 dB step	0	-	90	dB
		0.5 dB step	90	-	95	
Attenuation accuracy ³	1 - 2000 MHz	@ 0.25 - 20 dB	-	±0.25	±(5.5% of nominal value+ 0.25)	dB
		@ 20.25 - 60 dB	-	±0.50	±(2% of nominal value+ 0.90)	
		@ 60.25 - 90 dB	-	±0.75	±(3.5% of nominal value+ 0.70)	
	2000 - 4000 MHz	@ 0.25 - 20 dB	-	±0.20	±(5.5% of nominal value+ 0.25)	
		@ 20.25 - 60 dB	-	±0.30	±(2% of nominal value+0.7)	
		@ 60.25 - 90 dB	-	±0.40	±(3% of nominal value+0.90)	
	4000 - 6000 MHz	@ 0.25 - 20 dB	-	±0.15	±(6.5% of nominal value+0.15)	
		@ 20.25 - 60 dB	-	±0.35	±(3.5% of nominal value+0.45)	
		@ 60.25 - 90 dB	-	±0.65	±(3.5% of nominal value+0.90)	
	1 - 6000 MHz	@ 90.5 - 95 dB	-	±0.90	±(6% of nominal value-1.35)	
Insertion Loss	1 - 2000 MHz	@ 0 dB	-	4.5	7.0	dB
	2000 - 4000 MHz		-	6.0	8.5	
	4000 - 6000 MHz		-	7.4	10.0	
Isolation In - Out (within a channel)	1 - 6000 MHz	Note 4	-	100	-	dB
Isolation (between channels)	1 - 6000 MHz	@ 0 - 90 dB	100	-	-	
Input operating power ⁵ (RF In and RF Out out ports)	1 - 50 MHz	@ 0 - 90 dB	-	-	Note 6	dBm
	50 - 6000 MHz		-	-	+23	
IP3 Input ⁷	1 - 3000 MHz	@ 0 dB setting (P _{IN} =+10 dBm)	-	+55	-	dBm
	3000 - 6000 MHz		-	+52	-	
VSWR	1 - 500 MHz	@ 0 - 40 dB	-	1.15	-	:1
		@ 40.25 - 90 dB	-	1.05	-	
	500 - 4000 MHz	@ 0 - 40 dB	-	1.10	-	
		@ 40.25 - 90 dB	-	1.05	-	
	4000 - 6000 MHz	@ 0 - 90 dB	-	1.3	-	
Min Dwell Time per channel ⁸	1 - 6000 MHz	High speed mode	-	600	-	μsec
Channel Synchronization ⁹	1 - 6000 MHz	Note 8	-	400	-	μsec
Attenuation Transition Time ¹⁰	1 - 6000 MHz	-	-	650	-	nsec
Supply Voltage	-	via USB port	4.75	5	5.25	V
USB current draw	-	-	-	190	330	mA

¹ Attenuator RF ports are interchangeable, and support simultaneous, bidirectional signal transmission, however the specifications are guaranteed for the RF in and RF out as noted on the label. There may be minor changes in performance when injecting signals to the RF Out port.

² RF performance specified per channel, performance of all four channels is identical.

³ Max accuracy defined as ±[absolute error+% of attenuation setting] for example when setting the attenuator to 80 dB attenuation the maximum error at 5000 MHz will be:
 $\pm(0.90+0.035 \times 80) = \pm(0.90+2.8) = \pm 3.70 \text{ dB}$

⁴ Isolation In-Out is defined as max attenuation plus insertion loss; this is the path loss through the attenuator when initially powered up. After a brief delay (~0.5 sec typically) the attenuator will revert to a user defined "power-up" state (either max attenuation or a pre-set value).

⁵ Total operating input power per channel from both RF In and RF Out out ports. Compression level not noted as it exceeds max safe operating power level.

⁶ Derate linearly from +23 dBm at 50 MHz to +12 dBm at 1 MHz.

⁷ Tested with 1 MHz span between signals.

⁸ Minimum Dwell Time is the time the RC4DAT will take to respond to a command to change attenuation states in a channel without communication delays. In PC control add communication delays (on the order of msec for USB) to get actual response time.

⁹ Channel Synchronization is the delay between the first and last attenuator transitions beginning, in response to a command to set all channels.

¹⁰ Attenuation Transition Time is specified as the time between starting to change the attenuation state and settling on the requested attenuation state.

Absolute Maximum Ratings

Operating Temperature	0°C to 50°C	
Storage Temperature	-20°C to 85°C	
V _{USB} Max.	6V	
DC voltage at RF port	16V	
Total RF power for RF In & RF Out	@ 1 to 50 MHz	Derate linearly from +12 dBm@ 1 MHz to +26 dBm@50 MHz
	@ 50 to 6000 MHz	+26 dBm

Permanent damage may occur if any of these limits are exceeded.

Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.




Communication parameters


Interface	Parameter	Old units, up to S/N 11910299999	New units, from S/N 11910300001 and up
Ethernet control	supported protocols	TCP / IP, HTTP, Telnet, DHCP, UDP (limited)	TCP / IP, HTTP, Telnet, SSH, DHCP, UDP (limited)
	Max data rate	10 Mbps (10 Base-T Half Duplex)	100 Mbps (100 Base-T Full Duplex)
USB control	supported protocols	HID (Human Interface Device) - Full Speed	HID (Human Interface Device) - High Speed
	Min communication time	3 ms Typ ¹¹	400 µs Typ ¹¹

¹¹ USB min communication time is based on the polling interval of the USB HID protocol(125 µs polling interval, 1024 bytes per packet), medium CPU load and no other high speed USB devices using the USB bus.

RC4DAT response to communication interrupt

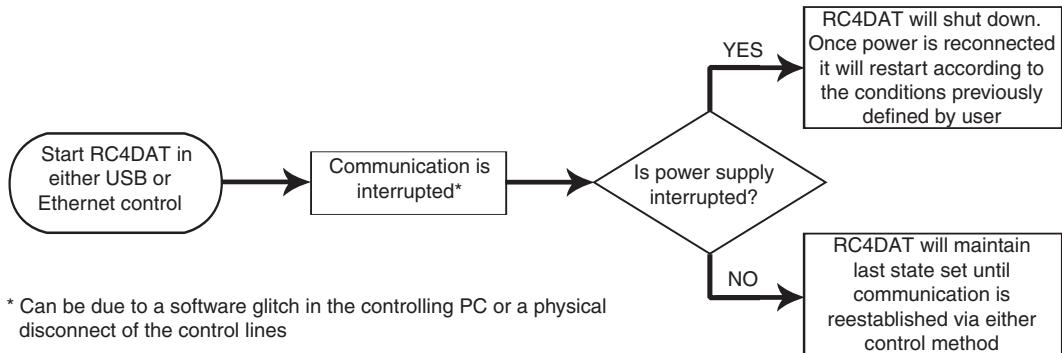

Block Diagram

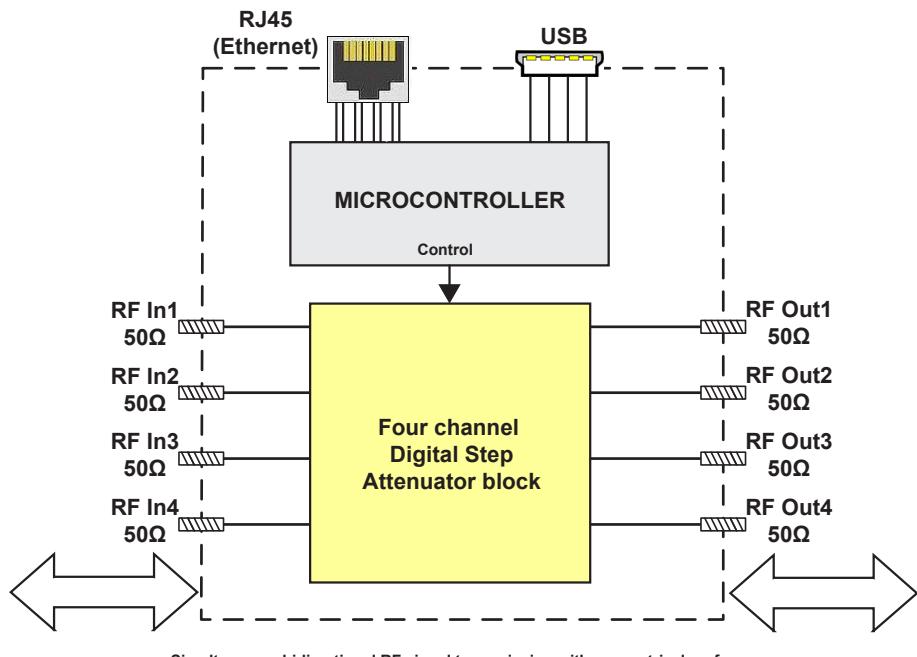




Connections

RF In 1,2,3,4	(SMA female)
RF Out 1,2,3,4	(SMA female)
USB	(USB type Mini-B female)
Network (Ethernet/LAN)	(RJ45 socket)

USB/Ethernet Programmable Attenuator


RC4DAT-6G-95

Outline Drawing (QE2249)

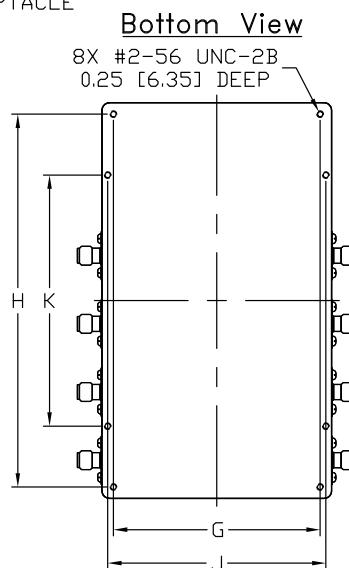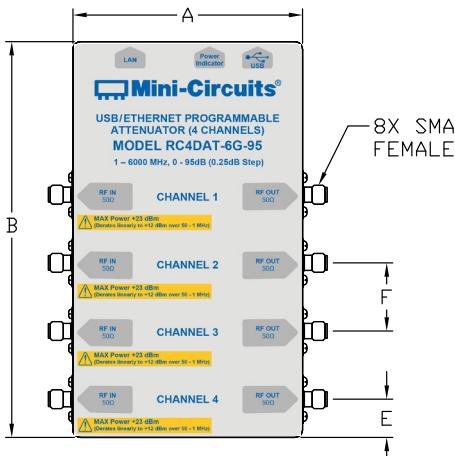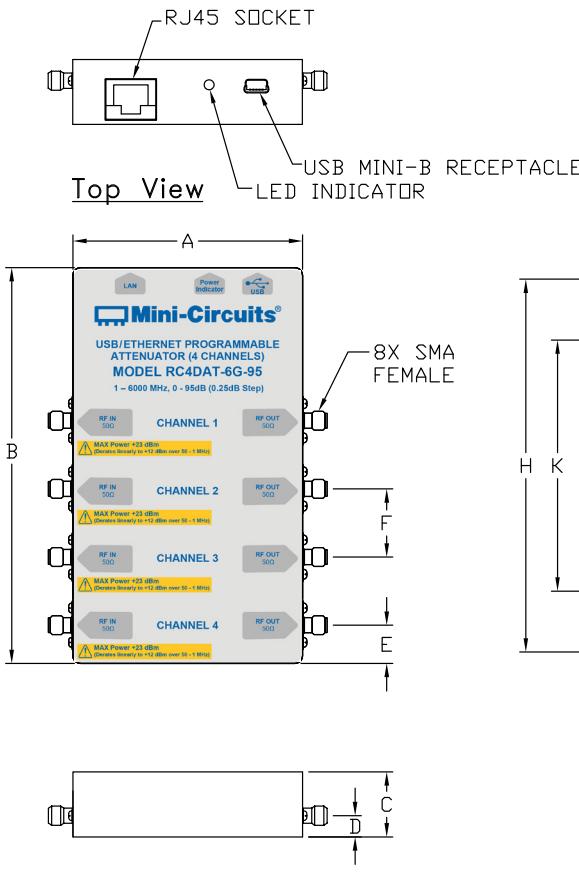

Connections

RF IN 1, 2, ,3, 4	(SMA female)
RF OUT 1, 2, ,3, 4	(SMA female)
USB	(USB type Mini-B female)
Network (Ethernet/LAN)	(RJ45 socket)

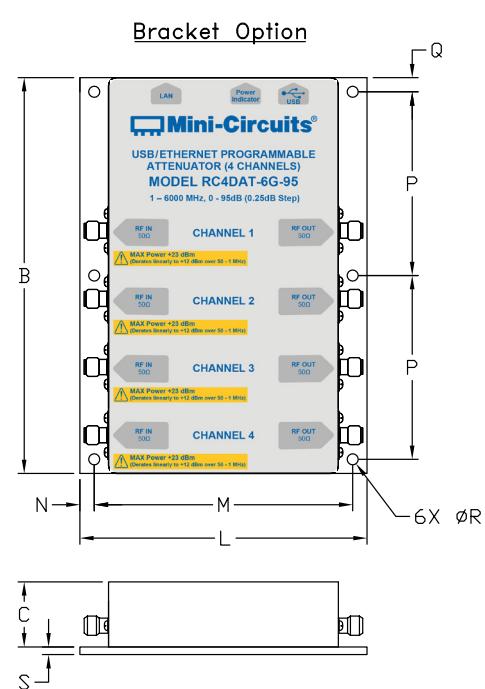

Instruction for mounting bracket:

1. Tool required: Phillips head screwdriver
2. Mount the bracket over threaded holes on the bottom side with the fasteners provided with the bracket.

Outline Dimensions (inch mm)


A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	WT. GRAMS
3.00 76.2	5.17 131.3	0.85 21.6	0.28 7.1	0.50 12.7	0.89 22.6	2.700 68.58	4.870 123.7	2.850 72.39	3.280 83.31	3.75 95.25	3.375 85.72	0.188 4.76	2.400 60.96	0.185 4.70	0.144 3.66	0.100 2.54	0.185 4.70	400

Mini-Circuits[®]



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Page 4 of 9



Typical Performance Curves

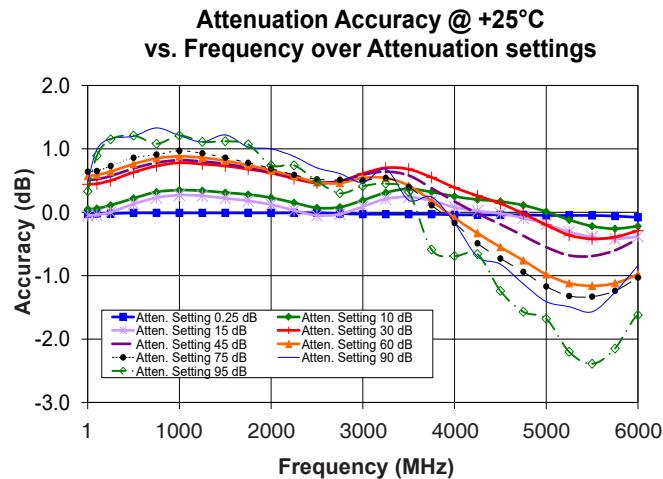


Attenuation relative to Insertion Loss @ +25°C vs. Frequency over Attenuation settings

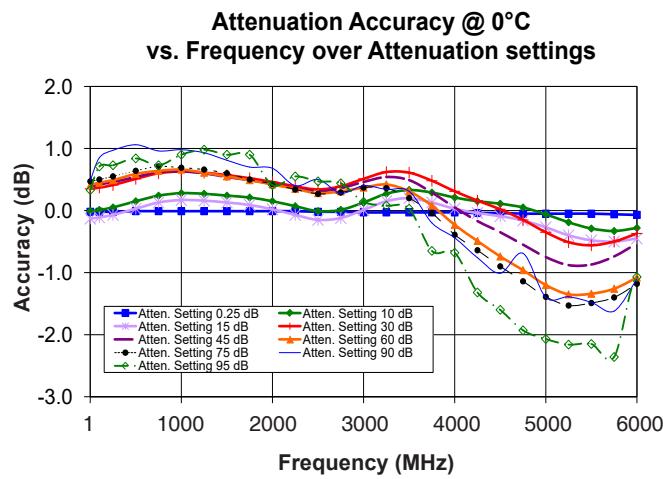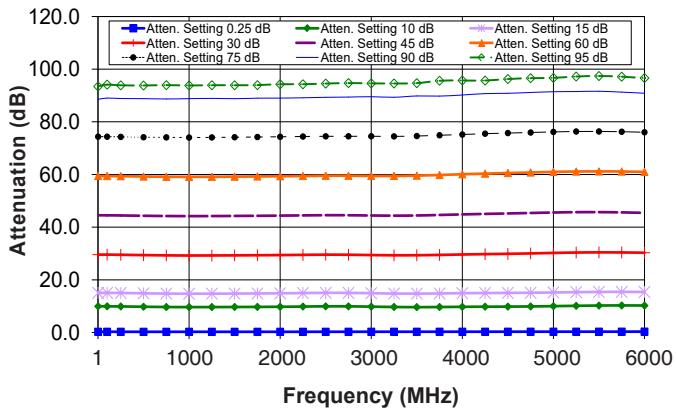







Attenuation relative to Insertion Loss @ 0°C vs. Frequency over Attenuation settings

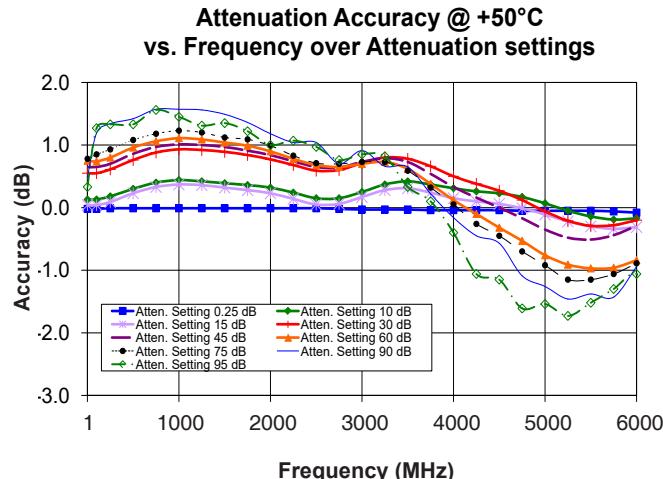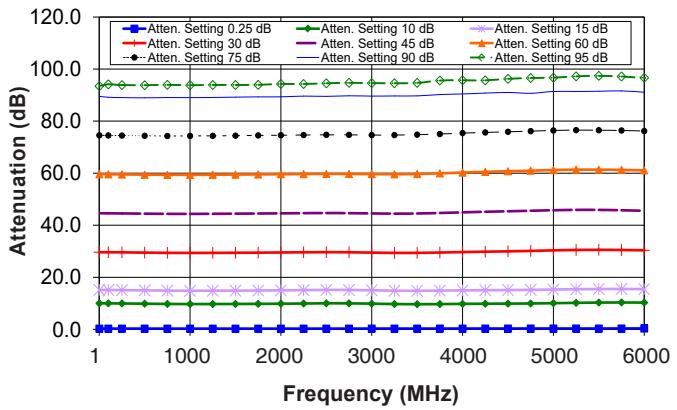


Attenuation relative to Insertion Loss @ +50°C vs. Frequency over Attenuation settings

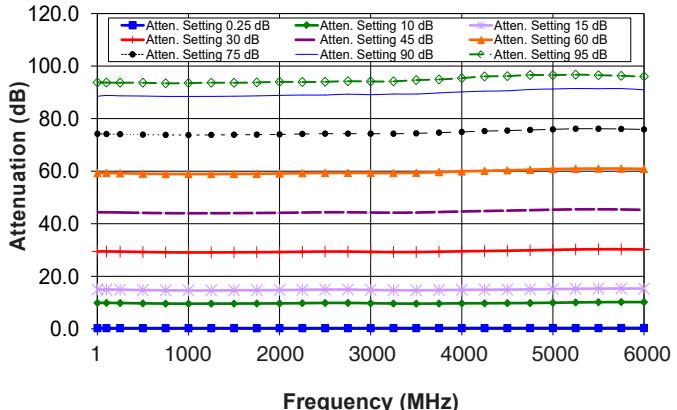


Typical Performance Curves (Continued)

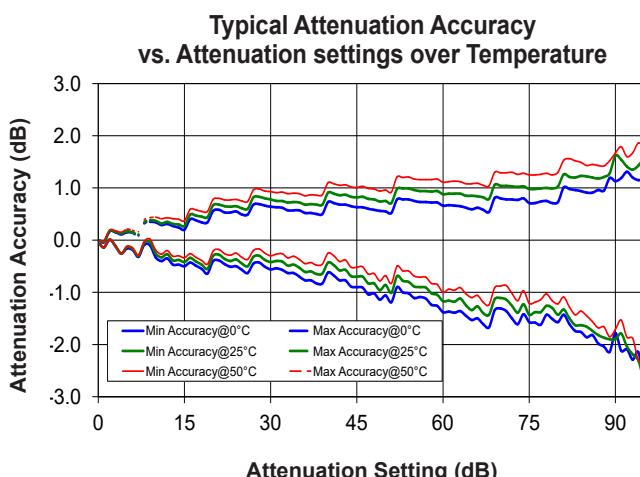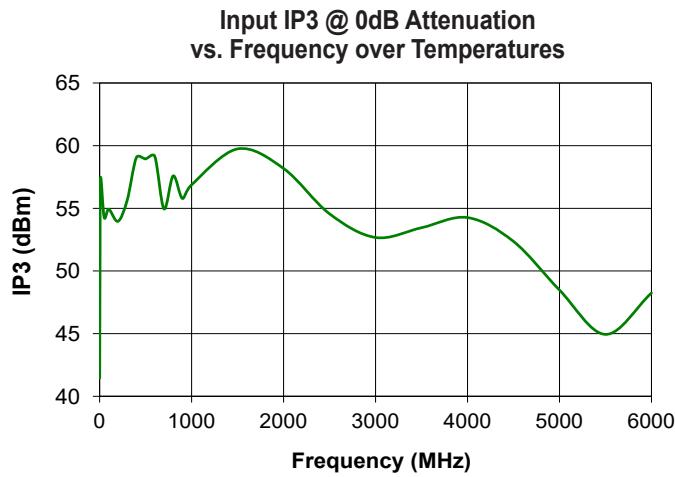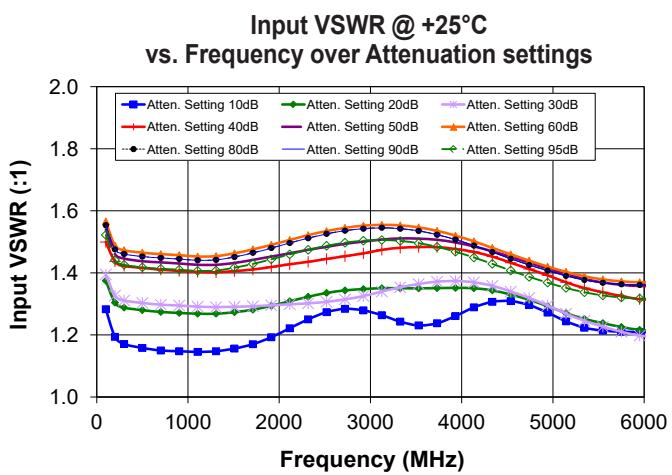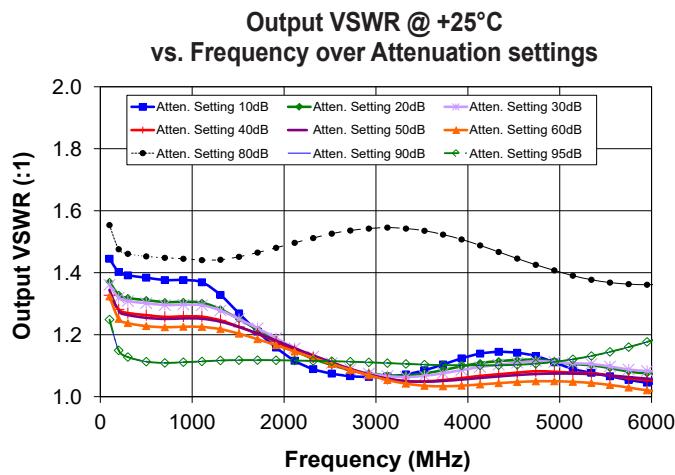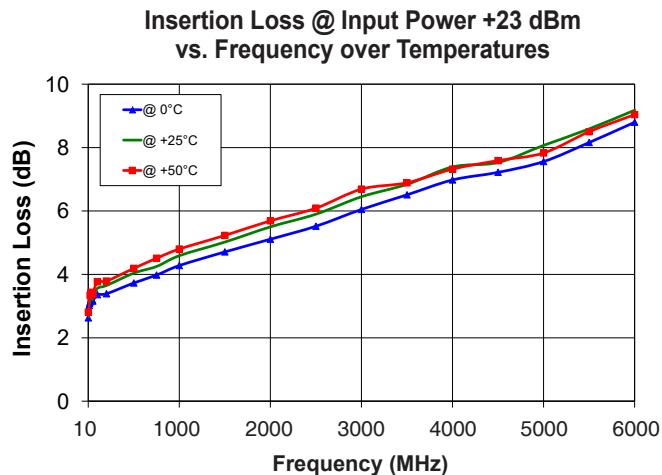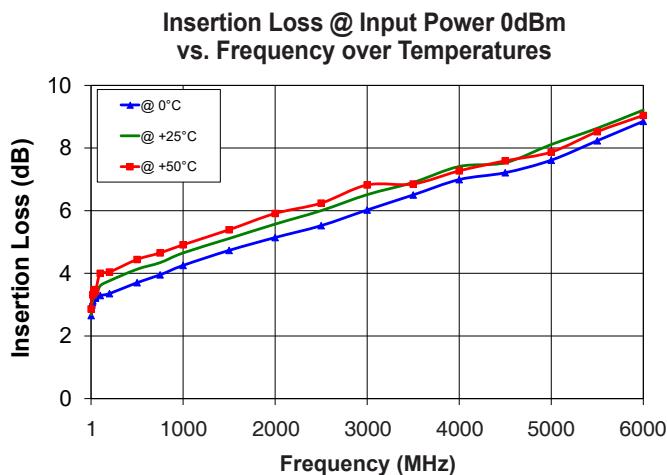


**Attenuation Accuracy @ 30dB setting
vs. Frequency at four channels**

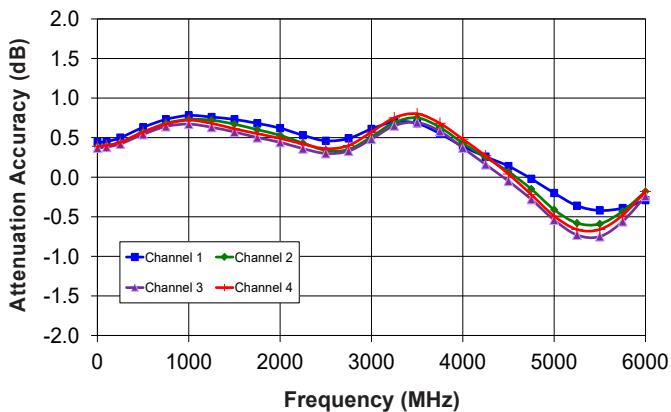


**Attenuation Accuracy @ 60dB setting
vs. Frequency at four channels**

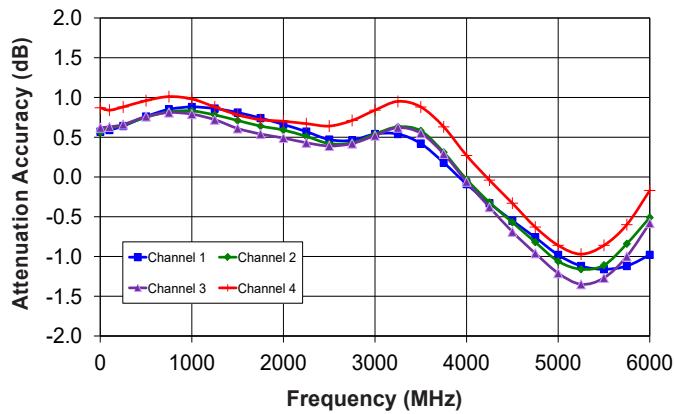


**Attenuation Accuracy @ 90dB setting
vs. Frequency at four channels**

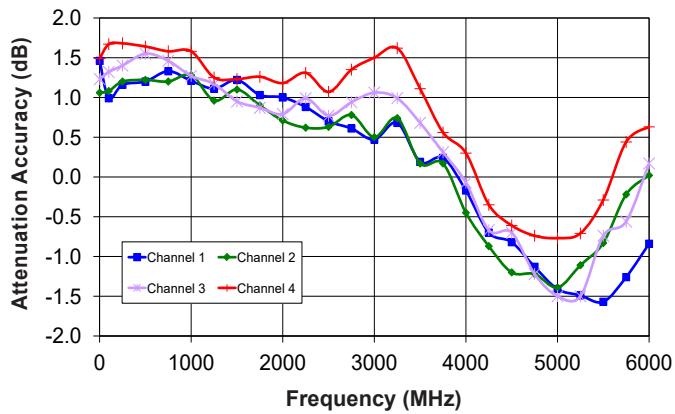

**Isolation between RF In 1 and RF In 2
vs. Frequency@ 0dB atten. setting**

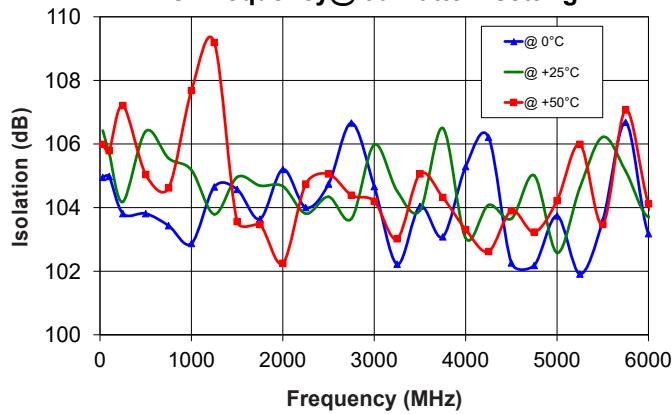

**Isolation between channels
vs. Frequency**

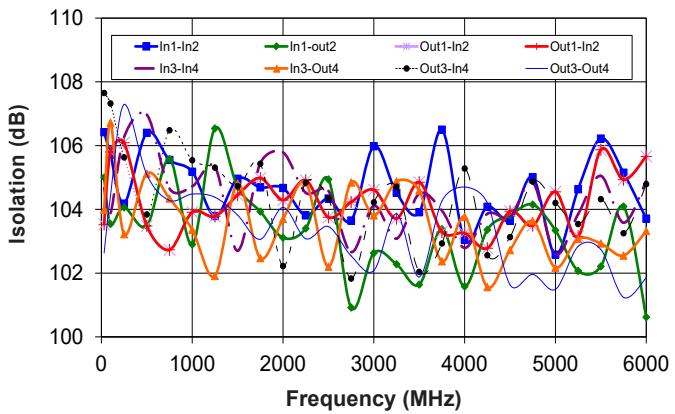

Software & Documentation Download:


- Mini-Circuits' full software and support package including user guide, Windows GUI, DLL files, programming manual and examples can be downloaded free of charge from <http://www.minicircuits.com/softwaredownload/patt.html>
- Please contact testsolutions@minicircuits.com for support

Minimum System Requirements

Parameter	Requirements	
Interface	USB HID or HTTP Get/Post or Telnet protocols or SSH protocols	
System requirements	GUI:	Windows 32 & 64 bit systems from Windows 98 up to Windows 10
	USB API (ActiveX & .Net)	Windows 32 & 64 bit systems with ActiveX or .Net support from Windows 98 up to Windows 10
	USB direct programming support	Linux, Windows systems from Windows 98 up to Windows 10
	HTTP, Telnet or SSH	Any computer with a network port and Ethernet-TCP/IP (HTTP, Telnet or SSH protocols) support
Hardware	Pentium® II or higher, RAM 256 MB	

Graphical User Interface (GUI) for Windows**Key Features:**

- Manual attenuation setting
- Sweep and Hop attenuation sequences directed from the PC, or entire sequence loaded into RC4DAT.
- Attenuator address configuration and Firmware upgrade
- Attenuation at power up may be set to selected attenuation level or last attenuation state recorded.
- USB, HTTP or Telnet control of RC4DAT
- Setting Ethernet configuration

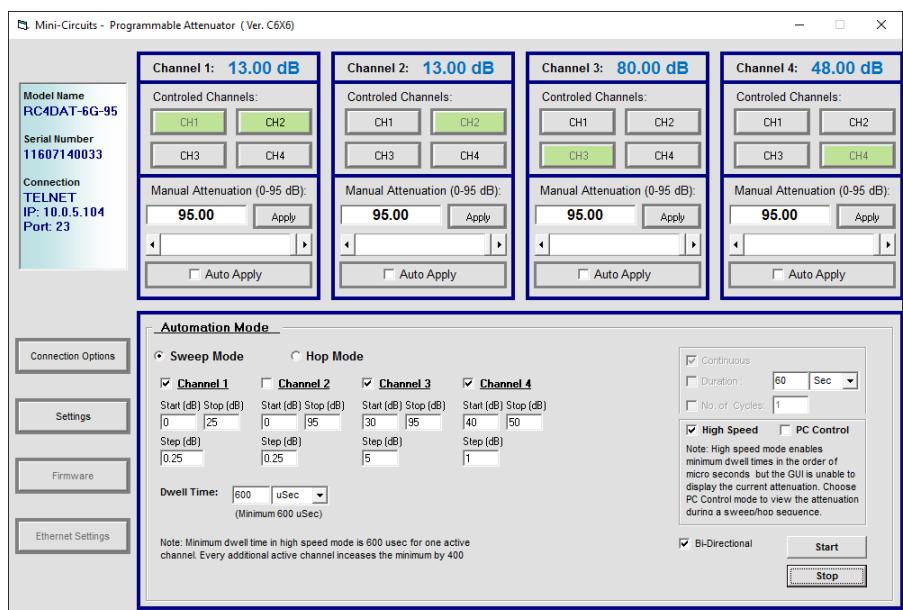**Application Programming Interface (API)**

Programming manual: https://www.minicircuits.com/softwaredownload/Prog_Manual-6-Programmable_Attenuator.pdf

Windows Support:

- API DLL files exposing the full switch functionality
 - ActiveX COM DLL file for creation of 32-bit programs
 - .Net library DLL file for creation of 32 / 64-bit programs
- Supported by most common programming environments (refer to application note [AN-49-001](#) for summary of tested environments)

Linux Support:

- Full attenuator control in a Linux environment is achieved by way of USB interrupt commands.

Ordering Information


Model	Description
RC4DAT-6G-95	USB/Ethernet four channel Programmable Attenuator

Included Accessories

Included Accessories	Part No.	Description
	MUSB-CBL-3+	2.6 ft (0.8 m) USB Cable: USB type A(Male) to USB type Mini-B(Male)

Optional Accessories

Optional Accessories	Description
USB-AC/DC-5	AC/DC 5V _{DC} Power Adapter with US, EU, IL, UK, AUS, and China power plugs ^{12,13}
MUSB-CBL-3+	2.6 ft (0.8 m) USB Cable: USB type A(Male) to USB type Mini-B(Male)
MUSB-CBL-7+	6.6 ft (2.0 m) USB Cable: USB type A(Male) to USB type Mini-B(Male)
CBL-RJ45-MM-5+	5 ft (1.5 m) Ethernet cable: RJ45(Male) to RJ45(Male) Cat 5E cable
BKT-355-02+	Bracket kit including 3.75" x 5.17" bracket, mounting screws and washers
RKT-RC4DAT	Rack-mounting bracket (19" width, 3U height) for up to 8 x RC4DAT-6G-xx 4-channel attenuators, including all required accessories for mounting within a rack cabinet. Please contact testsolutions@minicircuits.com for details.

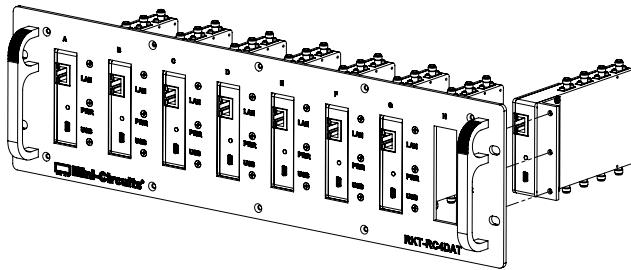

¹² The USB-AC/DC-5 may be used to provide the 5V_{DC} power input via USB port if operating the RC4DAT with Ethernet control. Not required if using USB control.

¹³ Power plugs for other countries are also available, if you need a power plug for a country not listed please contact testsolutions@minicircuits.com

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Programmable Attenuator

RC4DAT-6G-95

Typical Performance Data @ +25°C

FREQUENCY (MHz)	Attenuation relative to Insertion Loss (dB)								
	0.25 dB	10 dB	15 dB	30 dB	45 dB	60 dB	75 dB	90 dB	95 dB
	0.27	9.95	15.05	29.56	44.50	59.43	74.36	88.54	93.43
1	0.27	9.94	15.05	29.56	44.50	59.42	74.34	88.43	93.48
5	0.27	9.94	15.05	29.56	44.49	59.41	74.35	88.73	93.75
10	0.27	9.94	15.04	29.55	44.49	59.42	74.31	88.82	94.02
20	0.27	9.94	15.04	29.55	44.48	59.41	74.33	88.98	93.81
50	0.27	9.94	15.04	29.55	44.48	59.41	74.35	89.01	94.11
100	0.27	9.94	15.04	29.55	44.48	59.41	74.35	88.91	93.87
200	0.27	9.91	15.02	29.52	44.45	59.38	74.31	88.80	93.79
500	0.26	9.78	14.87	29.37	44.31	59.24	74.14	88.67	93.92
750	0.26	9.68	14.77	29.27	44.22	59.15	74.09	88.79	93.79
1000	0.26	9.65	14.73	29.22	44.18	59.12	74.03	88.79	93.79
1500	0.26	9.69	14.78	29.27	44.25	59.19	74.14	88.78	93.88
2000	0.26	9.77	14.88	29.38	44.37	59.34	74.31	89.00	94.27
2500	0.27	9.93	15.05	29.54	44.53	59.53	74.48	89.30	94.51
3000	0.28	9.81	14.91	29.39	44.41	59.46	74.50	89.53	94.59
3500	0.28	9.63	14.76	29.32	44.42	59.58	74.60	89.81	94.68
4000	0.29	9.75	14.92	29.61	44.83	60.09	75.17	90.17	95.69
4500	0.29	9.83	15.02	29.87	45.19	60.55	75.73	90.82	96.24
5000	0.30	10.00	15.19	30.21	45.55	60.98	76.17	91.41	96.68
5500	0.30	10.22	15.39	30.42	45.69	61.16	76.33	91.58	97.39
6000	0.33	10.22	15.38	30.29	45.42	60.98	76.03	90.84	96.62

FREQUENCY (MHz)	Attenuation accuracy relative to nominal attenuation setting (dB)								
	0.25 dB	10 dB	15 dB	30 dB	45 dB	60 dB	75 dB	90 dB	95 dB
	-0.02	0.05	-0.05	0.44	0.51	0.57	0.64	1.46	1.57
1	-0.02	0.06	-0.05	0.44	0.50	0.58	0.66	1.57	1.52
5	-0.02	0.06	-0.05	0.44	0.51	0.59	0.65	1.27	1.25
10	-0.02	0.06	-0.05	0.44	0.51	0.59	0.65	1.18	0.98
20	-0.02	0.06	-0.04	0.45	0.51	0.58	0.69	1.02	1.19
50	-0.02	0.06	-0.04	0.45	0.52	0.59	0.67	0.99	0.89
100	-0.02	0.06	-0.04	0.45	0.52	0.59	0.65	0.99	0.89
200	-0.02	0.09	-0.02	0.48	0.55	0.62	0.69	1.09	1.13
500	-0.01	0.22	0.13	0.63	0.69	0.76	0.86	1.20	1.21
750	-0.01	0.32	0.23	0.73	0.78	0.85	0.91	1.33	1.08
1000	-0.01	0.35	0.27	0.78	0.82	0.88	0.97	1.21	1.21
1500	-0.01	0.31	0.22	0.73	0.76	0.81	0.86	1.22	1.12
2000	-0.01	0.23	0.12	0.62	0.63	0.66	0.69	1.00	0.74
2500	-0.01	0.07	-0.05	0.46	0.47	0.47	0.52	0.70	0.49
3000	-0.03	0.19	0.09	0.61	0.59	0.54	0.50	0.47	0.41
3500	-0.03	0.37	0.24	0.68	0.58	0.42	0.40	0.19	0.32
4000	-0.04	0.25	0.08	0.39	0.17	-0.09	-0.17	-0.17	-0.69
4500	-0.04	0.17	-0.02	0.14	-0.19	-0.55	-0.73	-0.82	-1.24
5000	-0.05	0.01	-0.19	-0.20	-0.55	-0.98	-1.17	-1.41	-1.68
5500	-0.05	-0.22	-0.39	-0.42	-0.69	-1.16	-1.33	-1.57	-2.39
6000	-0.08	-0.22	-0.38	-0.29	-0.42	-0.98	-1.03	-0.84	-1.62

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR

RC4DAT-6G-90

160915

Page 1 of 3



Programmable Attenuator

RC4DAT-6G-95

Typical Performance Data @ +25°C

FREQUENCY (MHz)	Input VSWR (:1)								
	0.25 dB	10 dB	15 dB	30 dB	45 dB	60 dB	75 dB	90 dB	95 dB
100	1.28	1.37	1.39	1.50	1.54	1.57	1.55	1.55	1.52
200	1.19	1.30	1.33	1.44	1.46	1.49	1.48	1.48	1.44
500	1.16	1.28	1.30	1.42	1.44	1.46	1.45	1.45	1.42
750	1.15	1.27	1.30	1.41	1.43	1.46	1.45	1.45	1.41
1000	1.15	1.27	1.29	1.41	1.43	1.46	1.44	1.44	1.41
1500	1.15	1.27	1.29	1.40	1.43	1.46	1.45	1.45	1.42
2000	1.21	1.30	1.30	1.42	1.46	1.50	1.49	1.49	1.45
2500	1.27	1.33	1.31	1.44	1.48	1.53	1.52	1.52	1.49
3000	1.28	1.35	1.33	1.47	1.50	1.55	1.54	1.54	1.51
3500	1.23	1.35	1.36	1.48	1.51	1.55	1.54	1.54	1.50
4000	1.27	1.35	1.37	1.47	1.49	1.51	1.50	1.50	1.46
4500	1.31	1.33	1.34	1.44	1.46	1.46	1.45	1.45	1.41
5000	1.27	1.29	1.29	1.39	1.41	1.41	1.40	1.40	1.36
5500	1.21	1.24	1.23	1.34	1.37	1.38	1.37	1.37	1.33
6000	1.21	1.22	1.20	1.32	1.36	1.37	1.36	1.36	1.32

FREQUENCY (MHz)	Output VSWR (:1)								
	0.25 dB	10 dB	15 dB	30 dB	45 dB	60 dB	75 dB	90 dB	95 dB
100	1.44	1.37	1.36	1.33	1.34	1.32	1.27	1.25	1.25
200	1.40	1.33	1.32	1.28	1.28	1.25	1.17	1.15	1.15
500	1.38	1.31	1.30	1.26	1.25	1.23	1.14	1.11	1.11
750	1.38	1.31	1.30	1.26	1.25	1.22	1.14	1.11	1.11
1000	1.38	1.31	1.30	1.26	1.25	1.23	1.14	1.11	1.11
1500	1.27	1.25	1.25	1.23	1.23	1.20	1.14	1.12	1.12
2000	1.14	1.17	1.17	1.16	1.17	1.16	1.13	1.12	1.12
2500	1.08	1.10	1.11	1.11	1.11	1.11	1.11	1.11	1.11
3000	1.06	1.07	1.07	1.06	1.07	1.06	1.09	1.11	1.11
3500	1.08	1.07	1.07	1.05	1.05	1.04	1.07	1.10	1.10
4000	1.13	1.10	1.09	1.06	1.06	1.04	1.06	1.10	1.10
4500	1.14	1.12	1.11	1.08	1.07	1.05	1.06	1.10	1.10
5000	1.11	1.11	1.11	1.08	1.07	1.05	1.07	1.11	1.11
5500	1.07	1.09	1.10	1.07	1.07	1.04	1.09	1.14	1.14
6000	1.04	1.07	1.08	1.05	1.06	1.02	1.12	1.18	1.18

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR

RC4DAT-6G-90

160915

Page 2 of 3



Programmable Attenuator

RC4DAT-6G-95

Typical Performance Data @ +25°C

FREQUENCY (MHz)	IP3 (dBm)	Insertion Loss @P _{IN} =0 dBm (dB)	Insertion Loss @P _{IN} =+20 dBm (dB)
1	41.45	2.68	2.66
5	51.50	2.94	2.95
10	57.44	3.02	3.05
50	54.26	3.24	3.21
100	54.93	3.60	3.56
200	53.96	3.76	3.65
300	55.64	3.87	3.80
400	59.05	3.79	3.73
500	58.93	4.13	4.04
600	59.15	4.21	4.12
700	54.95	4.22	4.16
800	57.59	4.36	4.29
900	55.78	4.49	4.41
1000	56.87	4.65	4.59
1500	59.74	5.11	5.02
2000	58.18	5.57	5.50
2500	54.56	6.00	5.90
3000	52.67	6.51	6.45
3500	53.45	6.90	6.84
4000	54.26	7.41	7.39
4500	52.36	7.53	7.53
5000	48.48	8.11	8.07
5500	44.94	8.63	8.59
6000	48.24	9.21	9.18

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR

RC4DAT-6G-90

160915






Page 3 of 3



Programmable Attenuator

RC4DAT-6G-90

Typical Performance Curves @ +25°C

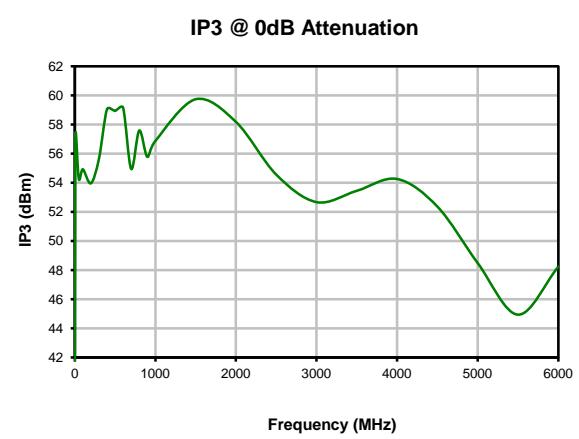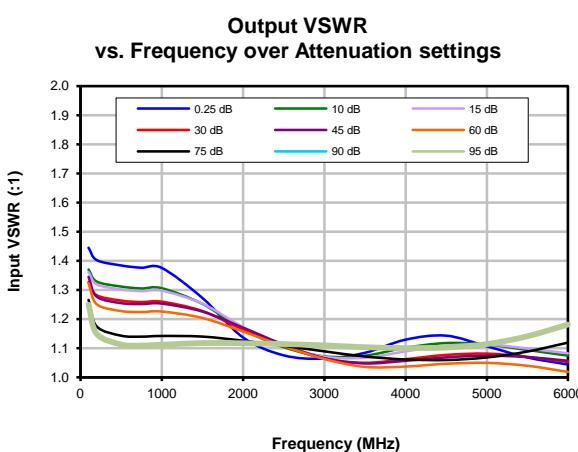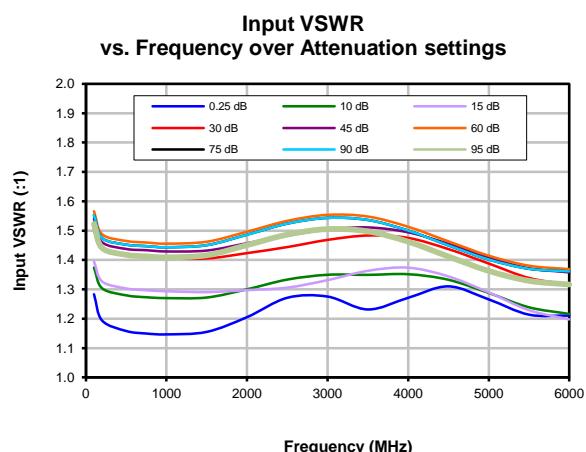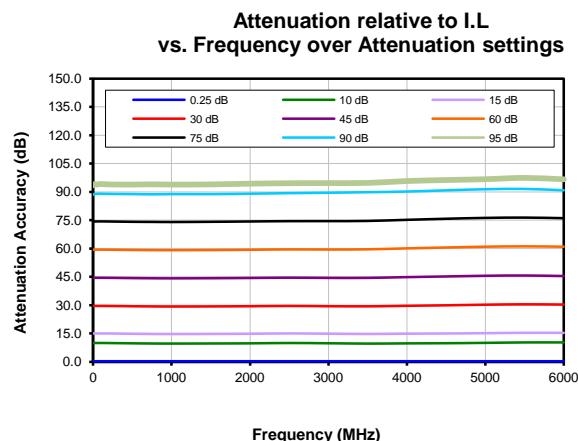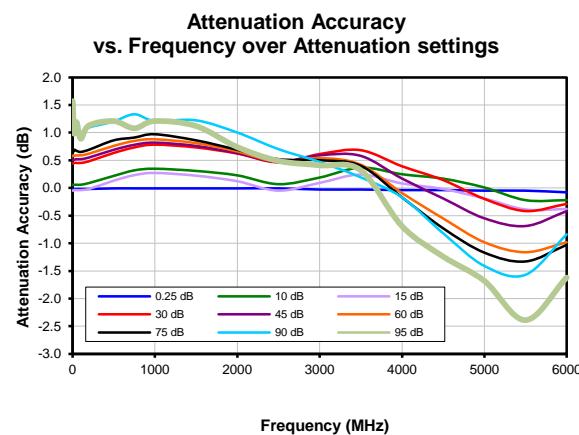

Notes:
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
RC4DAT-6G-95
160915
Page 1 of 1

Mini-Circuits®


www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Case Style

QE

Outline Dimensions

QE2249

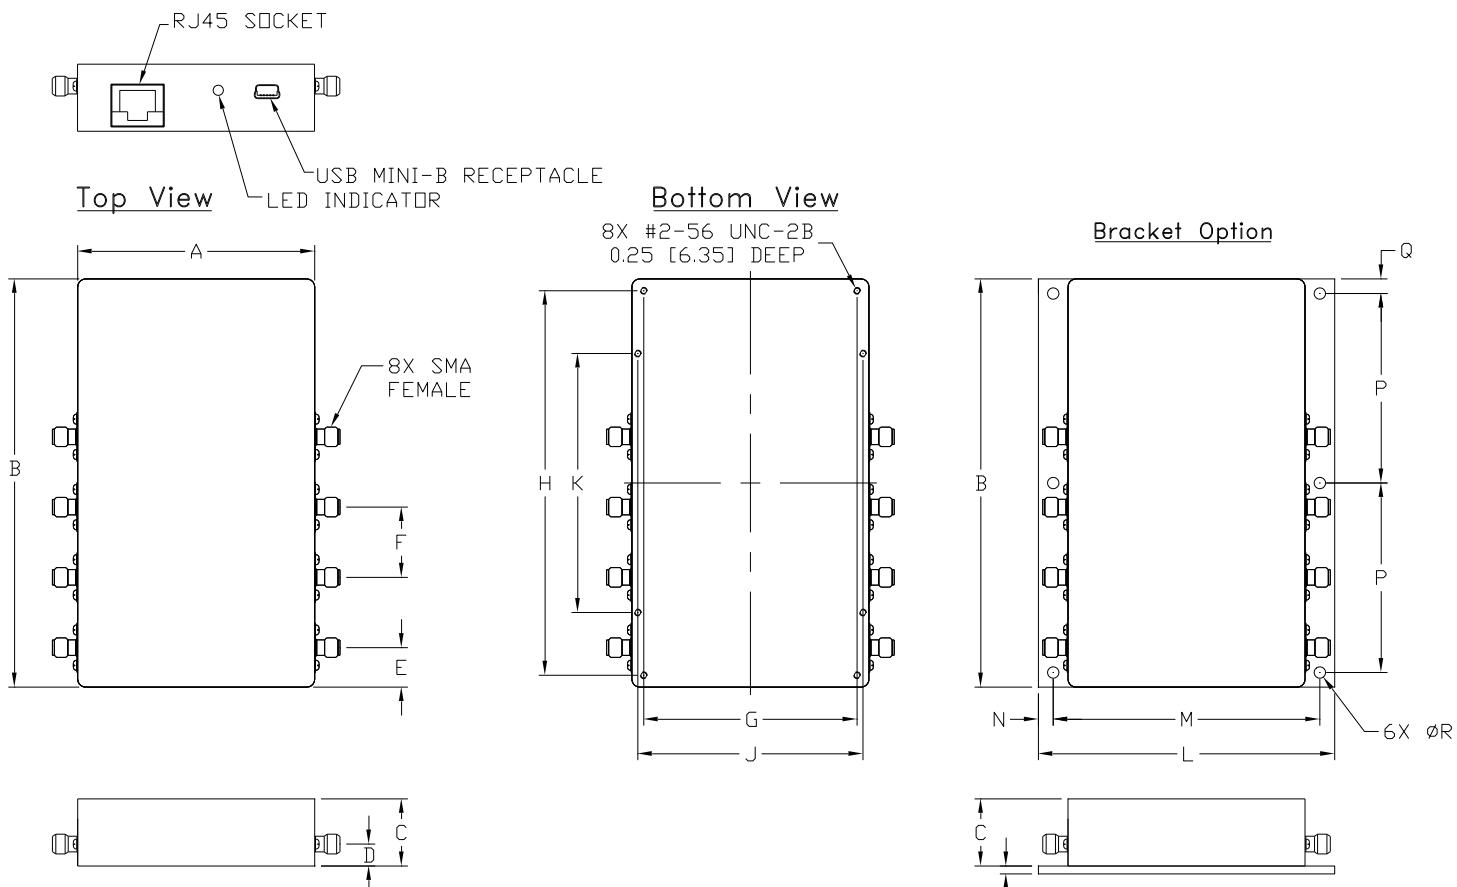

Instruction for mounting bracket:

1. Tool required: Phillips head screwdriver
2. Mount the bracket over threaded holes on the bottom side with the fasteners provided with the bracket.

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q
QE2249	3.00 (76.2)	5.17 (131.3)	.85 (21.6)	.28 (7.1)	.50 (12.7)	.89 (22.6)	2.700 (68.58)	4.870 (123.70)	2.850 (72.39)	3.280 (83.31)	3.75 (95.25)	3.375 (85.73)	.188 (4.76)	2.400 (60.96)	.185 (4.70)

CASE#	R	S	T	WT. GRAMS
QE2249	.144 (3.66)	100 (2.54)	.185 (4.70)	400

Notes:

1. Case material: Aluminum.
2. Case finish: Clear chemical conversion coating, non-chrome or trivalent chrome based.

 **Mini-Circuits®**

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Mini-Circuits ISO 9001 & ISO 14001 Certified



Environmental Specifications **ENV55T1**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-0° to 50° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-20° to 85° C Ambient Environment	Individual Model Data Sheet
Operating and Storage Humidity	5% to 85% RH (non-condensing)	Ambient
Bench Handling Test	Bench Top Tip 45° & Drop	MIL-PRF-28800F
Transit Drop Test	Free Fall Drop, 20 cm (7.9 inches)	MIL-PRF-28800F Class 3