



USB & ETHERNET

# Mechanical Switch Assembly

RCM-216

50Ω DC to 26.5 GHz 2 x SP6T + 2 x SPDT SMA-Female

## THE BIG DEAL

- Mechanical absorptive switches
- High reliability, millions of switch cycles
- Compact benchtop package with power supply
- Ethernet & USB control
- LED switch state indicators

## APPLICATIONS

- Benchtop and rack-mounted automated test systems
- 5G FR1 & FR3, WiFi 6E, millimeter wave radio infrastructure
- Military radio, radar & electronic warfare
- Switch matrices

## PRODUCT OVERVIEW

Mini-Circuits' RCM-216 houses a combination of independently controlled electro-mechanical SP6T and SPDT switches. Each switch operates over an exceptionally wide bandwidth from DC to 26.5 GHz with high isolation and low insertion loss. The absorptive switches are fail-safe / normally open with a break before make configuration and lifetime of millions of switching cycles when used within the noted specifications.

The switches are housed in a compact benchtop package with all SMA (female) RF connectors on the front along with LED indicators for a quick read out of switch states. Control and power connections are located on the rear panel.

The switch assembly can be controlled via USB or Ethernet (supporting HTTP and Telnet network protocols). Full software support is provided, including our user-friendly GUI application for Windows and a full API with programming instructions for Windows and Linux environments.



CASE STYLE: UV2068

DOWNLOAD

SOFTWARE PACKAGE

**RoHS Compliant**

See our website for RoHS Compliance methodologies and qualifications

## KEY FEATURES

Feature	Advantages
Mechanical switches	Mechanical absorptive switches provide low loss, high isolation, high reliability, repeatable performance and internal termination of input signals on the disconnected paths
Fail-safe design	The switches revert to a known default state when the DC supply is removed, allowing their use in systems that must continue to operate safely in the event of power failure
Ethernet & USB control	USB HID and Ethernet (HTTP & Telnet) interfaces ensure compatibility with most software environments and connection requirements.
Integrated control & power	Easy to use on the lab bench or integrate into larger automated test systems without the need to develop custom control systems.





## ELECTRICAL SPECIFICATIONS AT +25°C (EACH SP6T SWITCH)

Parameter	Conditions (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		26.5	GHz
Insertion Loss	DC – 8 GHz		0.15	0.30	dB
	8 – 18 GHz		0.30	0.50	
	18 – 26.5 GHz		0.45	0.70	
Isolation <sup>1</sup> (Inactive Paths)	DC – 8 GHz	70	90		dB
	8 – 18 GHz	60	80		
	18 – 26.5 GHz	55	70		
Return Loss <sup>2</sup>	DC – 8 GHz		20		dB
	8 – 18 GHz		16		
	18 – 26.5 GHz		14		
Switching Time	—		25		ms
RF Input Power (Cold Switching)	DC – 8 GHz			20	W
	8 – 18 GHz			10	
	18 – 26.5 GHz			5	
	Into internal termination <sup>3</sup>			1	
Switch Lifetime (per Switch)	100 mW hot switching <sup>4</sup>	2			million cycles
	1W hot switching		1		

## ELECTRICAL SPECIFICATIONS AT +25°C (EACH SPDT SWITCH)

Parameter	Conditions (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		26.5	GHz
Insertion Loss	DC-8 GHz		0.15	0.30	dB
	8-18 GHz		0.30	0.50	
	18-26.5 GHz		0.60	0.80	
Isolation <sup>1</sup> (Inactive Paths)	DC-8 GHz	75	90		dB
	8-18 GHz	60	66		
	18-26.5 GHz	55	65		
Return Loss <sup>5</sup>	DC-8 GHz		20		dB
	8-18 GHz		20		
	18-26.5 GHz		16		
Switching Time			25		ms
RF Input Power (Cold Switching)	DC-26.5 GHz			20	W
	Into internal termination			1	
Switch Lifetime	100 mW hot switching <sup>4</sup>		5		million cycles
	1 W hot switching		1		

1. Isolation measured between Com and any disconnected port. Example: Isolation for Com to 1 is the leakage measured at port 1 from a signal input at Com when the active switch path is set to Com to 2

2. Return loss into Com when active or ports 1-6 in any state; Com is reflective when disconnected





3. Maximum power into any internal termination is 1W per port, 3W total per switch

4. Hot switching power above this level will degrade the switch lifetime

5. Return loss into all ports in all states






## TYPICAL PERFORMANCE CURVES

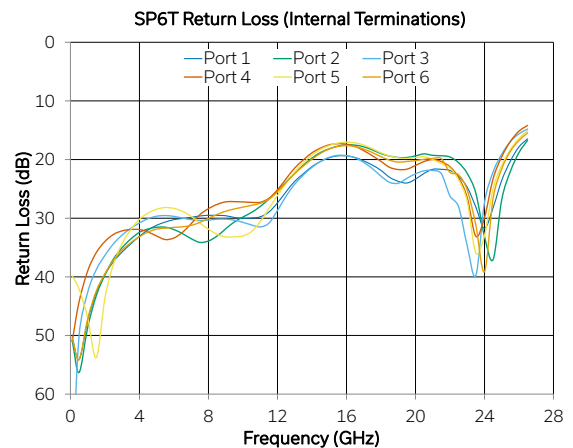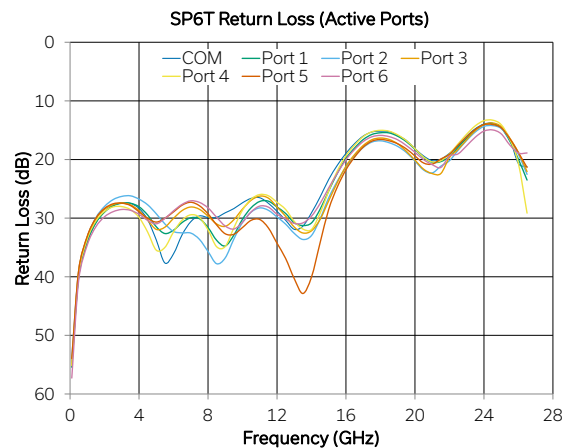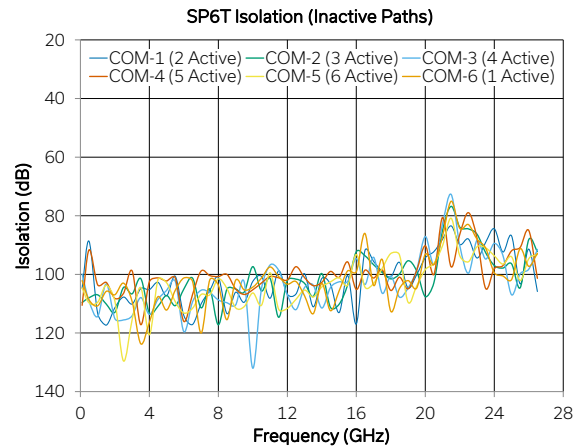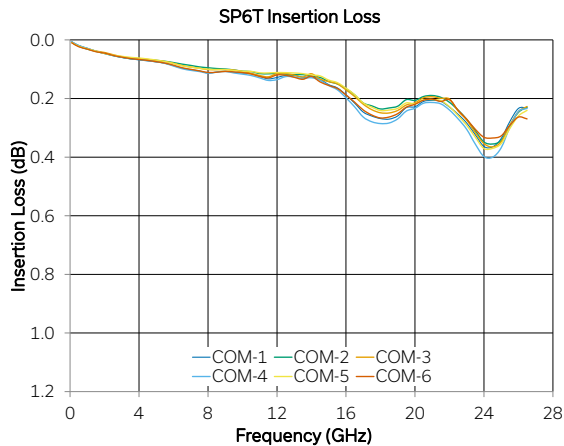



## TYPICAL PERFORMANCE CURVES

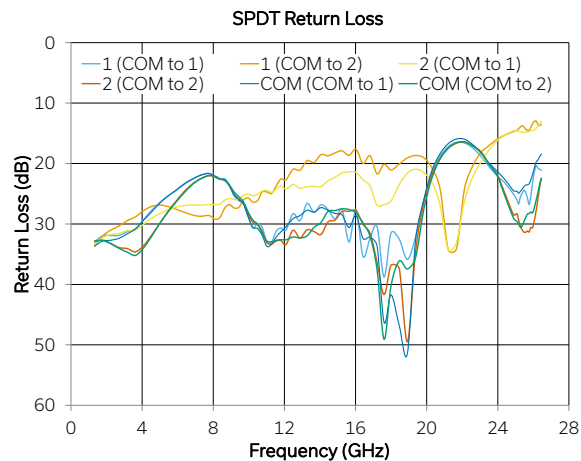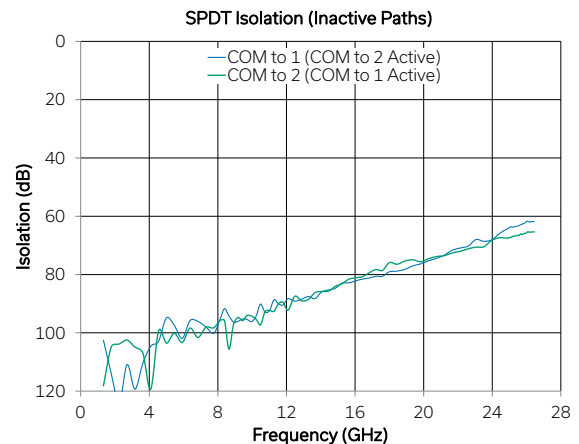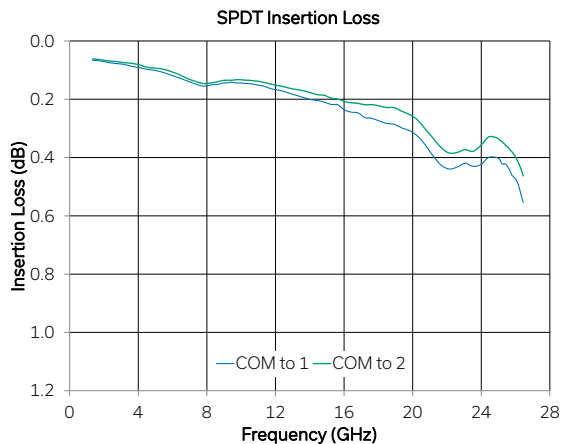



## ABSOLUTE MAXIMUM RATINGS

Parameter	Conditions	Limits	Units
Temperature	Operating	0 to +50	°C
	Storage	-20 to +60	


Permanent damage may occur if any of these limits are exceeded. Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.

## POWER SUPPLY

Parameter	Conditions	Typ	Max	Units
DC Voltage		24	26	V
Current Consumption	All switches disconnected	100		mA
	All switches connected	650		

Using included AC/DC-24-3W1 power supply adapter (110 / 240 V AC input)

## FUNCTIONAL BLOCK DIAGRAM

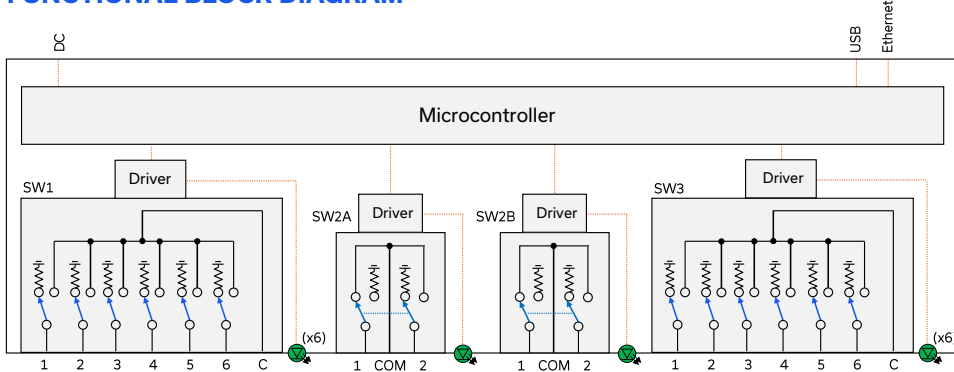

## CONNECTIONS

Port	Connector
SW 1 & 3 (COM & 1-6 each switch)	SMA female
SW 2A & 2B (COM & 1-2 each switch)	SMA female
USB	USB type B
Ethernet / LAN	RJ45
24V DC Input	2.1 mm center positive DC socket

C = Common port  
1-6 = Input / output ports

## SWITCH STATE TABLE (EACH SPDT SWITCH)

Switch Command	Switch x State	Switch x LED State
:SPDT:[x]:STATE:1	COM to 1	Green
:SPDT:[x]:STATE:2	COM to 2	Orange

## SWITCH STATE TABLE (EACH SP6T SWITCH)

Switch Command	Switch Command	Switch x LED State					
		LED1	LED2	LED3	LED4	LED5	LED6
:SP6T:[x]:STATE:0	All ports disconnected (COM open; 1-6 terminated)	Off	Off	Off	Off	Off	Off
:SP6T:[x]:STATE:1	C to 1	On	Off	Off	Off	Off	Off
:SP6T:[x]:STATE:2	C to 2	Off	On	Off	Off	Off	Off
:SP6T:[x]:STATE:3	C to 3	Off	Off	On	Off	Off	Off
:SP6T:[x]:STATE:4	C to 4	Off	Off	Off	On	Off	Off
:SP6T:[x]:STATE:5	C to 5	Off	Off	Off	Off	On	Off
:SP6T:[x]:STATE:6	C to 6	Off	Off	Off	Off	Off	On

x = Switch number

## POWER-UP OPTIONS

Mode	
Default	All switches power up in the default state: SPDT: COM to 1 SP6T: All ports disconnected
Last States	All switches resume the previous state from the point of last save

All switches revert to the default state when the power supply is turned off or disconnected



## CONTROL INTERFACES

Ethernet Control	Supported Protocols	TCP / IP, HTTP, Telnet, DHCP, UDP (limited)
	Max Data Rate	10 Mbps (10 Base-T Half Duplex)
USB Control	Supported Protocols	HID – Full Speed
	Min Communication Time <sup>6</sup>	3 ms typ

6. Based on the polling interval of the USB HID protocol (125  $\mu$ s with 64 bytes per packet) and no other significant CPU or USB activity

## SOFTWARE &amp; DOCUMENTATION

Mini-Circuits' full software and support package including user guide, Windows GUI, API, programming manual and examples can be downloaded free of charge (refer to the last page for the download path).

A comprehensive set of software control options is provided:

- GUI for Windows – Simple software interface for control via Ethernet and USB
- Programming / automation via Ethernet
  - Complete set of control commands which can be sent via any supported protocol – simple to implement in the majority of modern programming environments
- Programming / automation via USB
  - DLL files provide a full API for Windows with a set of intuitive functions which can be implemented in any programming environment supporting .Net Framework or ActiveX
  - Direct USB programming is possible in any other environment (not supporting .Net or ActiveX)

Please contact [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com) for support

## MINIMUM SYSTEM REQUIREMENTS

Hardware	Intel i3 (or equivalent) or later
GUI (USB or Ethernet Control)	Windows 7 or later
USB API DLL	Windows 7 or later with support for Microsoft .Net Framework or ActiveX
USB Direct Programming	Windows 7 or later; Linux
Ethernet	Windows, Linux or macOS with Ethernet TCP / IP support

## PROGRAMMING COMMANDS

The key ASCII / SCPI commands for control of the system for control via the Ethernet or USB API are summarized below (refer to the programming manual for full details):

Command / Query	Description
:MN?	Read model name
:SN?	Read serial number
:FIRMWARE?	Read firmware version
: <i>[sw_type]</i> : <i>[sw_label]</i> :STATE: <i>[port]</i>	Set a single switch state: <ul style="list-style-type: none"> <li>• <i>[sw_type]</i> = SPDT or SP6T</li> <li>• <i>[sw_label]</i> = 1, 2A, 2B, 3</li> <li>• <i>[port]</i> <ul style="list-style-type: none"> <li>• SP6T: 0 (all ports disconnected) to 6 (Com to 6)</li> <li>• SPDT: 1 (Com to 1) or 2 (Com to 2)</li> </ul> </li> <li>• Example :SPDT:2A:STATE:2 (set switch 2A to state 2)</li> </ul>
: <i>[sw_type]</i> : <i>[sw_label]</i> :STATE?	Get a single switch state: <ul style="list-style-type: none"> <li>• <i>[sw_type]</i> = SPDT or SP6T</li> <li>• <i>[sw_label]</i> = 1, 2A, 2B, 3</li> <li>• Example :SPDT:2A:STATE?</li> </ul>



## GRAPHICAL USER INTERFACE (GUI) FOR WINDOWS

- Connect via USB or Ethernet
- Run GUI in "demo mode" to evaluate software without a hardware connection

Modular ZT Controller (Ver. B1X10)

**Run Program - USB Control:**

USB

**Run Program - Ethernet Control:**

Device Ethernet Parameters:

IP Address:

Password:

☒ Use HTTP, Port:

☐ Use Telnet, Port:

Start

**Run Program in Demo Mode**

☒ ZTM Series - Select Configuration:

4 SPDT ,1 SP4T ,2 MTS, 4 RUDATs

☐ RCM Series - Select Configuration:

6 RUDATs

Start Demo Exit

- View and set all switch states at the click of a button
- Set switch power-up states
- Configure Ethernet settings
- Update firmware

Modular ZT Controller (Ver. B1X2)

Direct Mode Program:

Enter and send commands manually

Run Direct Mode Program

**Main Control**

USB Control

Model Name: RCM-216

Serial Number: 02110200012 (fw)

**WINDOW-1**

SP6T(HF)

1 2 3 4 5 6

1: 2 2: 3 3: 1 4: 1 5: 1 6: 1

**WINDOW-2**

SPDT-A SPDT-B

COM

A: 4 B: 2

**WINDOW-3**

SP6T(HF)

1 2 3 4 5 6

1: 3 2: 2 3: 1 4: 1 5: 1 6: 1

Back to Connect Screen

Ethernet-Config

☐ Dynamic Display Update



☐ Show User-Defined Labels

Set Switches on Power Up

USB Device Address: 255





## CASE STYLE DRAWING

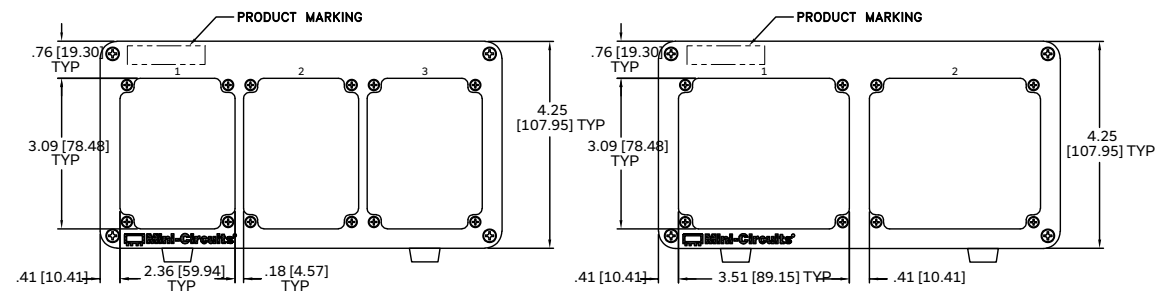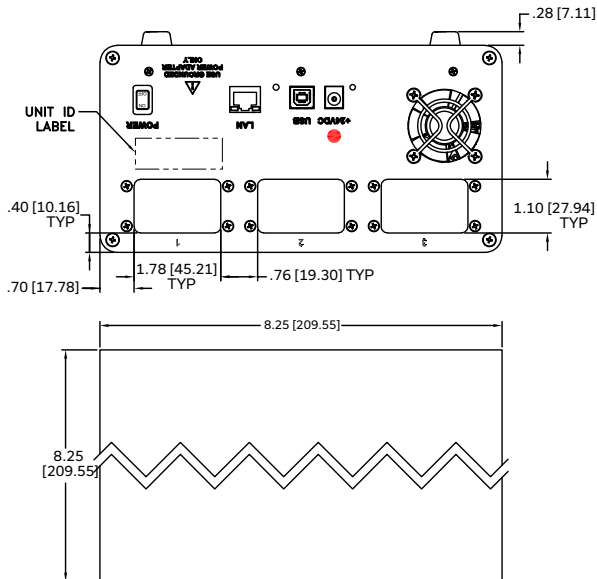

FRONT PANEL FOR RCM WITH RUDAT, SPDT, SP4T, SP6T &amp; MTS SWITCHES

FRONT PANEL FOR RCM WITH SP8T SWITCHES

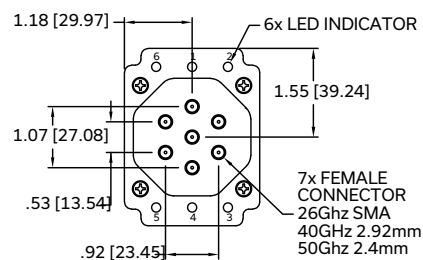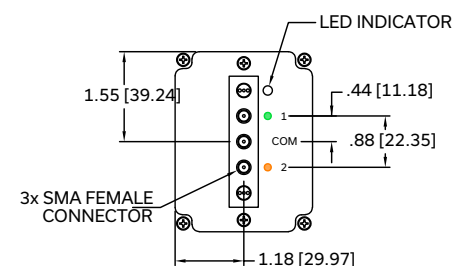

SP6TA 26GHz  
 SP6TA 40GHz  
 SP6TA 50GHz

Weight: 2350 grams.

Dimensions are in inches [mm]. Tolerances: 2 Pl.  $\pm .03$  inch; 3 Pl.  $\pm .015$  inch

## PRODUCT MARKING\*

Product Marking: RCM-216

Serial Number

\*Marking may contain other features or characters for internal lot control





USB & ETHERNET

# Mechanical Switch Assembly

**RCM-216**



Mini-Circuits






50Ω DC to 26.5 GHz 2 x SP6T + 2 x SPDT SMA-Female

DETAILED MODEL INFORMATION IS AVAILABLE ON OUR WEBSITE [CLICK HERE](#)

Case Style	UV2068
Software, User Guide & Programming Manual	<a href="http://www.minicircuits.com/softwaredownload/ztm_rcm.html">www.minicircuits.com/softwaredownload/ztm_rcm.html</a>
Environmental Rating	ENV55
Regulatory Compliance	<p>Refer to our website for compliance methodologies and qualifications</p> <p> </p> <p><a href="http://www.minicircuits.com/quality/environmental_introduction.html">www.minicircuits.com/quality/environmental_introduction.html</a></p>

Contact Us: [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com)

Included Accessories	Part Number	Description
	AC/DC-24-3W1	AC/DC 24V DC grounded power adaptor. Operating temperature 0 to +40 °C, max current 2.5A, IEC C6 AC inlet.
	CBL-3W1-xx	AC power cord (IEC C5 connector to local plug). Select one option from the list below. Please contact <a href="mailto:testsolutions@minicircuits.com">testsolutions@minicircuits.com</a> if your region is not listed.
	USB-CBL-AB-3+	USB cable (2.7ft) type A to type B
	CBL-RJ45-MM-5+	Ethernet cable (5 ft)

AC Power Cord Options	Part Number	Description
	CBL-3W1-US	USA NEMA 5-15 plug (type B) to IEC C5 connector
	CBL-3W1-EU	Europe CEE 7/7 plug (type E/F) to IEC C5 connector
	CBL-3W1-UK	UK BS-1363 plug (type G) to IEC C5 connector
	CBL-3W1-AU	Australia & China AS/NZS 3112 plug (type I) to IEC C5 connector
	CBL-3W1-IL	Israel SI-32 plug (type H) to IEC C5 connector

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)





## Environmental Specifications ENV55

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-0° to 50° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-20° to 60° C Ambient Environment	Individual Model Data Sheet
Operating and Storage Humidity	5% to 85% RH (non-condensing)	Ambient
Bench Handling Test	Bench Top Tip 45° & Drop	MIL-PRF-28800F
Transit Drop Test	Free Fall Drop, 20 cm (7.9 inches)	MIL-PRF-28800F Class 3