

X3 Frequency Multiplier

RMK-3-1262+

50Ω Output 6750 to 12600 MHz

The Big Deal

- Broadband, output frequency 6750 to 12600 MHz
- High rejection of adjacent harmonics, 45dB below the carrier, F3
- Small package size, 0.25" x 0.3"



CASE STYLE: TT1224

Product Overview

The RMK-3-1262+ is a self contained frequency tripler that does not require external components. It is constructed using a specially designed diode quad ring configuration to enable high rejection of adjacent harmonics. The tripler is packaged in a miniature 0.3" x 0.25" case, with wrap-around terminations to enable convenient high density assembly.

Key Features

| Feature | Advantages |
|---|---|
| Broadband frequency tripler Input 2250 to 4200 MHz Output 6750 to 12600 MHz | Enables the use of low frequency VCO's and Synthesizers to provide high frequency sources at low cost. |
| Low conversion loss, 15.5 dB | Enables output power to be sufficiently high so that amplifier gain requirements following the tripler is reduced. |
| High rejection of adjacent harmonics, F2, 45 dB and F4, 50 dB | Extremely high rejection of F2 and F4 harmonics enables a significant reduction of unwanted signals without the need for filters. |
| Low cost | Enables a practical solution to achieve high frequency sources from low cost, lower frequency VCO's and synthesizers. |

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



X3 Frequency Multiplier

RMK-3-1262+

50Ω Output 6750 to 12600 MHz

Maximum Ratings


| | |
|-----------------------|----------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| RF Input Power | 17 dBm |

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

| | |
|--------|---------|
| INPUT | 1 |
| OUTPUT | 4 |
| GROUND | 2,3,5,6 |


Outline Drawing

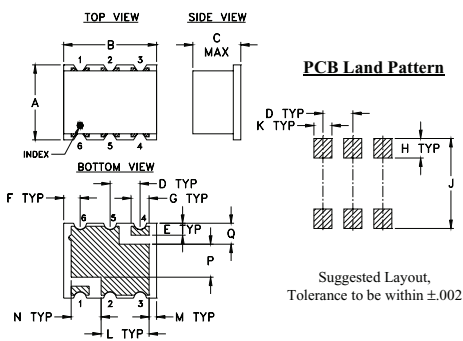

Outline Dimensions (inch)

| A | B | C | D | E | F | G | H |
|------|------|------|------|------|------|------|-------|
| .25 | .31 | .16 | .100 | .040 | .055 | .060 | .065 |
| 6.35 | 7.87 | 4.06 | 2.54 | 1.02 | 1.40 | 1.52 | 1.65 |
| J | K | L | M | N | P | Q | wt. |
| .300 | .060 | .160 | .025 | .100 | .110 | .070 | grams |
| 7.62 | 1.52 | 4.06 | 0.64 | 2.54 | 2.79 | 1.78 | 0.16 |

Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

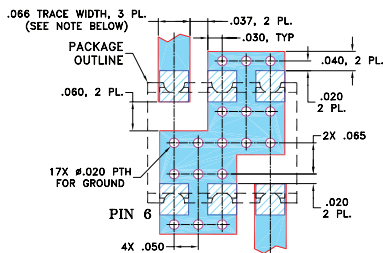

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- broadband
- high rejection F2, -45 dBc typ.; F4, -50 dBc typ.
- low cost
- aqueous washable

Applications

- synthesizers
- local oscillators
- satellite up and down converters





Electrical Specifications

| MULTIPLICATION FACTOR | FREQUENCY (MHz) | | INPUT POWER (dBm) | | CONVERSION LOSS (dB) | | *HARMONIC OUTPUT (dBC) | | |
|-----------------------|-----------------|------------|-------------------|------|----------------------|------|------------------------|---------|--------------|
| | F1 Input | F3 Output | Min. | Max. | Typ. | Max. | F1 Typ. | F2 Min. | F4 Typ. Min. |
| 3 | 2250-4200 | 6750-12600 | 7 | 11 | 15.5 | 20 | 5 | -7 | 45 31 50 35 |

* Harmonics of input frequency below the power level of F3

Typical Performance Data

| Input Frequency (MHz) | INPUT RF= 7 dBm | | | | INPUT RF= 11 dBm | | | |
|-----------------------|-------------------------|--------------------------|--------------------------|--------------------------|-------------------------|--------------------------|--------------------------|--------------------------|
| | Conversion Loss (dB) F3 | Harmonic Output (dBc) F1 | Harmonic Output (dBc) F2 | Harmonic Output (dBc) F4 | Conversion Loss (dB) F3 | Harmonic Output (dBc) F1 | Harmonic Output (dBc) F2 | Harmonic Output (dBc) F4 |
| 2250.00 | 17.34 | 4.37 | 55.37 | 56.83 | 15.75 | 8.87 | 57.56 | 54.38 |
| 2350.00 | 16.73 | 4.35 | 55.50 | 60.18 | 15.55 | 8.39 | 57.41 | 56.26 |
| 2450.00 | 15.78 | 4.68 | 55.43 | 55.15 | 14.93 | 8.40 | 58.27 | 54.07 |
| 2550.00 | 14.89 | 4.94 | 55.55 | 63.09 | 14.04 | 8.62 | 58.28 | 54.02 |
| 2650.00 | 14.49 | 4.64 | 55.10 | 63.33 | 14.26 | 7.69 | 57.02 | 51.50 |
| 2750.00 | 14.17 | 4.37 | 54.22 | 58.10 | 14.47 | 6.93 | 54.77 | 51.98 |
| 2850.00 | 14.53 | 3.57 | 52.72 | 56.68 | 14.77 | 6.12 | 53.26 | 53.23 |
| 2955.00 | 14.96 | 2.65 | 51.53 | 55.20 | 14.78 | 5.53 | 52.64 | 52.86 |
| 3065.00 | 13.93 | 2.97 | 51.62 | 53.77 | 15.19 | 4.58 | 51.48 | 52.28 |
| 3175.00 | 14.25 | 2.18 | 49.82 | 52.00 | 16.00 | 3.32 | 49.38 | 50.78 |
| 3285.00 | 14.62 | 1.52 | 47.86 | 51.01 | 15.68 | 3.29 | 48.08 | 50.55 |
| 3395.00 | 15.16 | 0.63 | 46.51 | 48.13 | 15.54 | 3.04 | 47.61 | 48.80 |
| 3505.00 | 14.96 | 0.35 | 46.85 | 48.16 | 15.22 | 2.79 | 48.25 | 47.53 |
| 3615.00 | 15.24 | 0.40 | 47.10 | 47.46 | 15.91 | 1.75 | 47.39 | 46.11 |
| 3725.00 | 15.75 | -1.31 | 41.54 | 50.15 | 16.72 | 0.54 | 43.14 | 46.61 |
| 3835.00 | 15.96 | -1.78 | 40.06 | 53.41 | 16.62 | -0.31 | 42.91 | 50.32 |
| 3945.00 | 15.77 | -1.88 | 39.53 | 53.18 | 16.04 | -0.63 | 43.09 | 53.97 |
| 4050.00 | 16.41 | -3.10 | 38.50 | 52.62 | 16.11 | -0.06 | 42.56 | 57.35 |
| 4150.00 | 15.90 | -3.04 | 38.51 | 56.51 | 15.75 | -0.15 | 42.83 | 59.83 |
| 4200.00 | 15.81 | -3.06 | 38.43 | 60.50 | 15.82 | -0.36 | 42.58 | 60.83 |

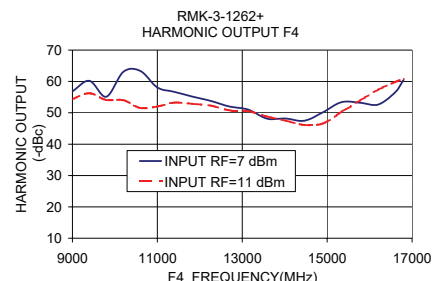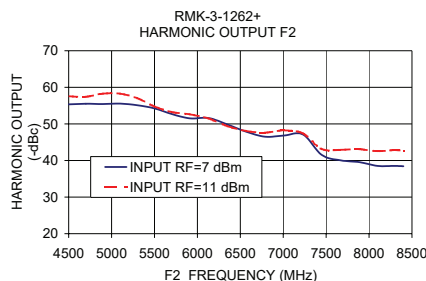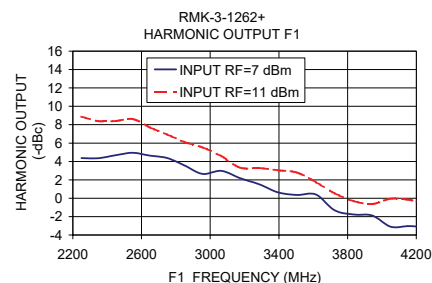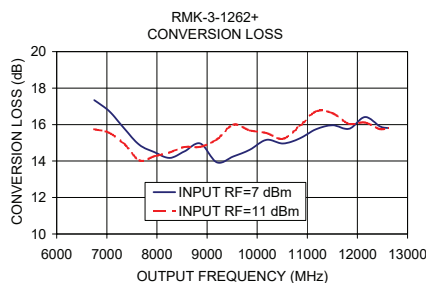

Generic photo used for illustration purposes only
CASE STYLE: TT1224

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

| Reel Size | Devices/Reel |
|-----------|----------------------|
| 7" | 10, 20, 50, 100, 200 |
| 13" | 500 |



Frequency Multiplier (Tripler)

RMK-3-1262+

Typical Performance Data

Test Conditions: RF Input Power = 7 dBm @ +25°C

| FREQUENCY (MHz) | | | | CONVERSION LOSS (dB) | HARMONIC OUTPUT* (-dBc) | | |
|-----------------|-----------|-----------|-----------|----------------------|-------------------------|-----------|-----------|
| X1 OUTPUT | X2 OUTPUT | X3 OUTPUT | X4 OUTPUT | X3 OUTPUT | X1 OUTPUT | X2 OUTPUT | X4 OUTPUT |
| 2250.0 | 4500.0 | 6750.0 | 9000.0 | 17.22 | 4.84 | 58.72 | 60.26 |
| 2300.0 | 4600.0 | 6900.0 | 9200.0 | 16.29 | 5.32 | 55.37 | 55.83 |
| 2350.0 | 4700.0 | 7050.0 | 9400.0 | 16.53 | 4.69 | 56.40 | 63.24 |
| 2400.0 | 4800.0 | 7200.0 | 9600.0 | 16.28 | 4.71 | 55.14 | 60.40 |
| 2450.0 | 4900.0 | 7350.0 | 9800.0 | 15.66 | 5.02 | 55.12 | 57.45 |
| 2500.0 | 5000.0 | 7500.0 | 10000.0 | 14.48 | 5.84 | 56.76 | 56.52 |
| 2550.0 | 5100.0 | 7650.0 | 10200.0 | 14.69 | 5.44 | 55.18 | 58.85 |
| 2600.0 | 5200.0 | 7800.0 | 10400.0 | 14.18 | 5.50 | 57.82 | 63.17 |
| 2650.0 | 5300.0 | 7950.0 | 10600.0 | 14.78 | 4.66 | 54.07 | 69.37 |
| 2700.0 | 5400.0 | 8100.0 | 10800.0 | 13.98 | 5.05 | 56.01 | 61.58 |
| 2750.0 | 5500.0 | 8250.0 | 11000.0 | 13.82 | 4.87 | 54.54 | 58.39 |
| 2800.0 | 5600.0 | 8400.0 | 11200.0 | 14.24 | 4.38 | 54.06 | 57.34 |
| 2850.0 | 5700.0 | 8550.0 | 11400.0 | 13.93 | 4.51 | 54.27 | 54.61 |
| 2900.0 | 5800.0 | 8700.0 | 11600.0 | 15.38 | 3.01 | 51.89 | 58.04 |
| 2980.0 | 5960.0 | 8940.0 | 11920.0 | 14.33 | 3.30 | 52.83 | 55.01 |
| 3060.0 | 6120.0 | 9180.0 | 12240.0 | 14.07 | 3.24 | 51.78 | 54.95 |
| 3140.0 | 6280.0 | 9420.0 | 12560.0 | 13.58 | 3.32 | 51.15 | 52.40 |
| 3220.0 | 6440.0 | 9660.0 | 12880.0 | 14.16 | 2.34 | 50.03 | 51.03 |
| 3300.0 | 6600.0 | 9900.0 | 13200.0 | 15.40 | 0.87 | 47.57 | 49.78 |
| 3380.0 | 6760.0 | 10140.0 | 13520.0 | 14.97 | 0.93 | 46.86 | 48.20 |
| 3460.0 | 6920.0 | 10380.0 | 13840.0 | 15.58 | 0.13 | 46.46 | 46.64 |
| 3540.0 | 7080.0 | 10620.0 | 14160.0 | 15.79 | -0.32 | 46.71 | 47.44 |
| 3620.0 | 7240.0 | 10860.0 | 14480.0 | 14.87 | 0.10 | 46.71 | 47.67 |
| 3700.0 | 7400.0 | 11100.0 | 14800.0 | 16.09 | -1.24 | 42.03 | 50.38 |
| 3780.0 | 7560.0 | 11340.0 | 15120.0 | 16.68 | -2.17 | 40.18 | 51.04 |
| 3860.0 | 7720.0 | 11580.0 | 15440.0 | 16.19 | -2.20 | 40.10 | 52.11 |
| 3940.0 | 7880.0 | 11820.0 | 15760.0 | 16.21 | -2.45 | 39.37 | 51.93 |
| 4020.0 | 8040.0 | 12060.0 | 16080.0 | 16.13 | -2.53 | 38.95 | 52.28 |
| 4100.0 | 8200.0 | 12300.0 | 16400.0 | 16.06 | -3.06 | 38.77 | 54.17 |
| 4180.0 | 8360.0 | 12540.0 | 16720.0 | 15.84 | -3.24 | 38.63 | 56.64 |
| 4260.0 | 8520.0 | 12780.0 | 17040.0 | 16.23 | -3.77 | 37.62 | 63.02 |

* Harmonic Output below power level of X3 Output.



P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4851 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MIN-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. X1

RMK-3-1262+

9/15/2009

Page 1 of 6

Frequency Multiplier (Tripler)

RMK-3-1262+

Typical Performance Data

Test Conditions: RF Input Power = 7 dBm @ -40°C

| FREQUENCY (MHz) | | | | CONVERSION LOSS (dB) | HARMONIC OUTPUT* (-dBc) | | |
|-----------------|-----------|-----------|-----------|----------------------|-------------------------|-----------|-----------|
| X1 OUTPUT | X2 OUTPUT | X3 OUTPUT | X4 OUTPUT | X3 OUTPUT | X1 OUTPUT | X2 OUTPUT | X4 OUTPUT |
| 2250.0 | 4500.0 | 6750.0 | 9000.0 | 17.37 | 4.19 | 57.89 | 59.24 |
| 2300.0 | 4600.0 | 6900.0 | 9200.0 | 15.91 | 5.15 | 55.43 | 54.81 |
| 2350.0 | 4700.0 | 7050.0 | 9400.0 | 16.67 | 4.10 | 56.02 | 63.27 |
| 2400.0 | 4800.0 | 7200.0 | 9600.0 | 16.24 | 4.35 | 54.69 | 58.43 |
| 2450.0 | 4900.0 | 7350.0 | 9800.0 | 15.72 | 4.51 | 54.49 | 59.51 |
| 2500.0 | 5000.0 | 7500.0 | 10000.0 | 14.03 | 5.76 | 56.33 | 54.05 |
| 2550.0 | 5100.0 | 7650.0 | 10200.0 | 14.67 | 4.94 | 54.46 | 55.27 |
| 2600.0 | 5200.0 | 7800.0 | 10400.0 | 14.07 | 5.12 | 57.12 | 63.26 |
| 2650.0 | 5300.0 | 7950.0 | 10600.0 | 14.86 | 4.16 | 53.32 | 65.12 |
| 2700.0 | 5400.0 | 8100.0 | 10800.0 | 13.57 | 4.99 | 55.70 | 64.58 |
| 2750.0 | 5500.0 | 8250.0 | 11000.0 | 13.47 | 4.84 | 53.92 | 60.09 |
| 2800.0 | 5600.0 | 8400.0 | 11200.0 | 13.98 | 4.23 | 53.75 | 58.21 |
| 2850.0 | 5700.0 | 8550.0 | 11400.0 | 13.60 | 4.31 | 54.11 | 53.24 |
| 2900.0 | 5800.0 | 8700.0 | 11600.0 | 15.70 | 2.14 | 51.12 | 57.14 |
| 2980.0 | 5960.0 | 8940.0 | 11920.0 | 14.39 | 2.76 | 51.69 | 55.06 |
| 3060.0 | 6120.0 | 9180.0 | 12240.0 | 14.18 | 2.72 | 50.67 | 56.44 |
| 3140.0 | 6280.0 | 9420.0 | 12560.0 | 13.15 | 3.22 | 50.60 | 51.67 |
| 3220.0 | 6440.0 | 9660.0 | 12880.0 | 13.40 | 2.57 | 49.98 | 50.95 |
| 3300.0 | 6600.0 | 9900.0 | 13200.0 | 14.91 | 0.89 | 47.34 | 49.12 |
| 3380.0 | 6760.0 | 10140.0 | 13520.0 | 14.02 | 1.38 | 46.97 | 48.29 |
| 3460.0 | 6920.0 | 10380.0 | 13840.0 | 15.29 | -0.07 | 46.13 | 45.63 |
| 3540.0 | 7080.0 | 10620.0 | 14160.0 | 15.55 | -0.55 | 46.23 | 46.95 |
| 3620.0 | 7240.0 | 10860.0 | 14480.0 | 13.93 | 0.53 | 46.73 | 47.42 |
| 3700.0 | 7400.0 | 11100.0 | 14800.0 | 15.36 | -1.06 | 41.94 | 50.55 |
| 3780.0 | 7560.0 | 11340.0 | 15120.0 | 16.70 | -2.76 | 38.16 | 49.86 |
| 3860.0 | 7720.0 | 11580.0 | 15440.0 | 15.89 | -2.48 | 38.35 | 50.77 |
| 3940.0 | 7880.0 | 11820.0 | 15760.0 | 16.19 | -2.94 | 38.02 | 49.91 |
| 4020.0 | 8040.0 | 12060.0 | 16080.0 | 15.67 | -2.59 | 37.97 | 50.70 |
| 4100.0 | 8200.0 | 12300.0 | 16400.0 | 15.77 | -3.29 | 37.67 | 51.56 |
| 4180.0 | 8360.0 | 12540.0 | 16720.0 | 15.74 | -3.66 | 37.51 | 52.89 |
| 4260.0 | 8520.0 | 12780.0 | 17040.0 | 15.73 | -3.81 | 36.54 | 60.68 |

* Harmonic Output below power level of X3 Output.



P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4851 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MIN-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. X1
RMK-3-1262+
9/15/2009
Page 2 of 6

Frequency Multiplier (Tripler)

RMK-3-1262+

Typical Performance Data

Test Conditions: RF Input Power = 7 dBm @ +85°C

| FREQUENCY (MHz) | | | | CONVERSION LOSS (dB) | HARMONIC OUTPUT* (-dBc) | | |
|-----------------|-----------|-----------|-----------|----------------------|-------------------------|-----------|-----------|
| X1 OUTPUT | X2 OUTPUT | X3 OUTPUT | X4 OUTPUT | X3 OUTPUT | X1 OUTPUT | X2 OUTPUT | X4 OUTPUT |
| 2250.0 | 4500.0 | 6750.0 | 9000.0 | 17.15 | 5.19 | 59.07 | 60.94 |
| 2300.0 | 4600.0 | 6900.0 | 9200.0 | 16.44 | 5.40 | 55.68 | 56.28 |
| 2350.0 | 4700.0 | 7050.0 | 9400.0 | 16.43 | 5.09 | 56.39 | 61.93 |
| 2400.0 | 4800.0 | 7200.0 | 9600.0 | 16.34 | 4.96 | 55.37 | 60.23 |
| 2450.0 | 4900.0 | 7350.0 | 9800.0 | 15.78 | 5.17 | 55.32 | 56.65 |
| 2500.0 | 5000.0 | 7500.0 | 10000.0 | 14.84 | 5.75 | 57.24 | 57.34 |
| 2550.0 | 5100.0 | 7650.0 | 10200.0 | 14.78 | 5.61 | 55.43 | 60.10 |
| 2600.0 | 5200.0 | 7800.0 | 10400.0 | 14.49 | 5.55 | 57.88 | 62.51 |
| 2650.0 | 5300.0 | 7950.0 | 10600.0 | 14.89 | 4.97 | 54.46 | 64.10 |
| 2700.0 | 5400.0 | 8100.0 | 10800.0 | 14.34 | 5.07 | 55.84 | 59.73 |
| 2750.0 | 5500.0 | 8250.0 | 11000.0 | 14.22 | 4.83 | 54.48 | 57.10 |
| 2800.0 | 5600.0 | 8400.0 | 11200.0 | 14.66 | 4.26 | 53.85 | 56.14 |
| 2850.0 | 5700.0 | 8550.0 | 11400.0 | 14.30 | 4.42 | 54.28 | 54.53 |
| 2900.0 | 5800.0 | 8700.0 | 11600.0 | 15.55 | 3.05 | 52.03 | 56.74 |
| 2980.0 | 5960.0 | 8940.0 | 11920.0 | 14.75 | 3.35 | 52.80 | 53.67 |
| 3060.0 | 6120.0 | 9180.0 | 12240.0 | 14.53 | 3.21 | 51.74 | 53.82 |
| 3140.0 | 6280.0 | 9420.0 | 12560.0 | 14.31 | 3.04 | 51.18 | 52.60 |
| 3220.0 | 6440.0 | 9660.0 | 12880.0 | 14.78 | 2.20 | 50.07 | 51.32 |
| 3300.0 | 6600.0 | 9900.0 | 13200.0 | 15.90 | 0.84 | 47.59 | 49.81 |
| 3380.0 | 6760.0 | 10140.0 | 13520.0 | 15.53 | 0.82 | 47.01 | 48.33 |
| 3460.0 | 6920.0 | 10380.0 | 13840.0 | 15.95 | 0.19 | 46.86 | 46.97 |
| 3540.0 | 7080.0 | 10620.0 | 14160.0 | 16.23 | -0.27 | 47.23 | 47.71 |
| 3620.0 | 7240.0 | 10860.0 | 14480.0 | 15.68 | -0.25 | 46.15 | 48.51 |
| 3700.0 | 7400.0 | 11100.0 | 14800.0 | 16.68 | -1.36 | 42.01 | 50.85 |
| 3780.0 | 7560.0 | 11340.0 | 15120.0 | 17.02 | -2.07 | 41.17 | 51.03 |
| 3860.0 | 7720.0 | 11580.0 | 15440.0 | 16.48 | -2.02 | 41.27 | 52.55 |
| 3940.0 | 7880.0 | 11820.0 | 15760.0 | 16.47 | -2.32 | 40.20 | 52.26 |
| 4020.0 | 8040.0 | 12060.0 | 16080.0 | 16.37 | -2.33 | 40.07 | 53.30 |
| 4100.0 | 8200.0 | 12300.0 | 16400.0 | 16.27 | -2.86 | 39.67 | 55.92 |
| 4180.0 | 8360.0 | 12540.0 | 16720.0 | 16.31 | -3.27 | 39.48 | 59.00 |
| 4260.0 | 8520.0 | 12780.0 | 17040.0 | 16.84 | -3.94 | 38.60 | 60.83 |

* Harmonic Output below power level of X3 Output.



P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4851 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MIN-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. X1

RMK-3-1262+

9/15/2009

Page 3 of 6

Frequency Multiplier (Tripler)

RMK-3-1262+

Typical Performance Data

Test Conditions: RF Input Power = 11 dBm @ +25°C

| FREQUENCY (MHz) | | | | CONVERSION LOSS (dB) | HARMONIC OUTPUT* (-dBc) | | |
|-----------------|-----------|-----------|-----------|----------------------|-------------------------|-----------|-----------|
| X1 OUTPUT | X2 OUTPUT | X3 OUTPUT | X4 OUTPUT | | X3 OUTPUT | X1 OUTPUT | X2 OUTPUT |
| 2250.0 | 4500.0 | 6750.0 | 9000.0 | 15.74 | 8.88 | 60.69 | 54.99 |
| 2300.0 | 4600.0 | 6900.0 | 9200.0 | 15.27 | 9.20 | 57.41 | 53.92 |
| 2350.0 | 4700.0 | 7050.0 | 9400.0 | 15.64 | 8.31 | 58.26 | 57.73 |
| 2400.0 | 4800.0 | 7200.0 | 9600.0 | 14.87 | 8.79 | 57.43 | 56.52 |
| 2450.0 | 4900.0 | 7350.0 | 9800.0 | 14.75 | 8.66 | 57.73 | 55.11 |
| 2500.0 | 5000.0 | 7500.0 | 10000.0 | 14.33 | 8.78 | 58.77 | 53.63 |
| 2550.0 | 5100.0 | 7650.0 | 10200.0 | 14.10 | 8.84 | 57.59 | 54.67 |
| 2600.0 | 5200.0 | 7800.0 | 10400.0 | 14.06 | 8.31 | 60.20 | 52.95 |
| 2650.0 | 5300.0 | 7950.0 | 10600.0 | 13.83 | 8.28 | 56.28 | 52.49 |
| 2700.0 | 5400.0 | 8100.0 | 10800.0 | 14.49 | 7.16 | 57.36 | 52.33 |
| 2750.0 | 5500.0 | 8250.0 | 11000.0 | 14.47 | 6.99 | 54.99 | 52.25 |
| 2800.0 | 5600.0 | 8400.0 | 11200.0 | 14.75 | 6.54 | 54.61 | 52.32 |
| 2850.0 | 5700.0 | 8550.0 | 11400.0 | 14.89 | 6.30 | 54.40 | 52.61 |
| 2900.0 | 5800.0 | 8700.0 | 11600.0 | 15.00 | 5.96 | 52.74 | 52.66 |
| 2980.0 | 5960.0 | 8940.0 | 11920.0 | 15.08 | 5.30 | 52.82 | 52.49 |
| 3060.0 | 6120.0 | 9180.0 | 12240.0 | 15.17 | 4.93 | 51.63 | 52.45 |
| 3140.0 | 6280.0 | 9420.0 | 12560.0 | 15.57 | 4.24 | 50.23 | 51.45 |
| 3220.0 | 6440.0 | 9660.0 | 12880.0 | 15.87 | 3.53 | 49.87 | 51.06 |
| 3300.0 | 6600.0 | 9900.0 | 13200.0 | 15.45 | 3.36 | 48.26 | 50.21 |
| 3380.0 | 6760.0 | 10140.0 | 13520.0 | 15.86 | 2.81 | 47.59 | 48.51 |
| 3460.0 | 6920.0 | 10380.0 | 13840.0 | 15.96 | 2.51 | 47.76 | 47.06 |
| 3540.0 | 7080.0 | 10620.0 | 14160.0 | 16.04 | 2.07 | 48.30 | 46.66 |
| 3620.0 | 7240.0 | 10860.0 | 14480.0 | 15.88 | 1.95 | 47.67 | 46.23 |
| 3700.0 | 7400.0 | 11100.0 | 14800.0 | 16.56 | 1.06 | 43.15 | 46.31 |
| 3780.0 | 7560.0 | 11340.0 | 15120.0 | 16.70 | 0.46 | 42.70 | 47.25 |
| 3860.0 | 7720.0 | 11580.0 | 15440.0 | 16.65 | 0.03 | 43.23 | 49.97 |
| 3940.0 | 7880.0 | 11820.0 | 15760.0 | 16.29 | 0.10 | 42.80 | 53.45 |
| 4020.0 | 8040.0 | 12060.0 | 16080.0 | 16.07 | 0.33 | 43.22 | 57.52 |
| 4100.0 | 8200.0 | 12300.0 | 16400.0 | 15.91 | -0.19 | 42.67 | 59.83 |
| 4180.0 | 8360.0 | 12540.0 | 16720.0 | 15.83 | -0.46 | 43.26 | 60.66 |
| 4260.0 | 8520.0 | 12780.0 | 17040.0 | 16.17 | -1.00 | 42.13 | 64.58 |

* Harmonic Output below power level of X3 Output.



P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4851 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MIN-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. X1

RMK-3-1262+

9/15/2009

Page 4 of 6

Frequency Multiplier (Tripler)

RMK-3-1262+

Typical Performance Data

Test Conditions: RF Input Power = 11 dBm @ -40°C

| FREQUENCY (MHz) | | | | CONVERSION LOSS (dB) | HARMONIC OUTPUT* (-dBc) | | |
|-----------------|-----------|-----------|-----------|----------------------|-------------------------|-----------|-----------|
| X1 OUTPUT | X2 OUTPUT | X3 OUTPUT | X4 OUTPUT | X3 OUTPUT | X1 OUTPUT | X2 OUTPUT | X4 OUTPUT |
| 2250.0 | 4500.0 | 6750.0 | 9000.0 | 15.27 | 9.01 | 59.85 | 54.26 |
| 2300.0 | 4600.0 | 6900.0 | 9200.0 | 14.56 | 9.56 | 57.27 | 53.54 |
| 2350.0 | 4700.0 | 7050.0 | 9400.0 | 15.16 | 8.46 | 58.05 | 57.43 |
| 2400.0 | 4800.0 | 7200.0 | 9600.0 | 14.17 | 9.19 | 57.05 | 55.93 |
| 2450.0 | 4900.0 | 7350.0 | 9800.0 | 14.20 | 8.86 | 57.04 | 55.14 |
| 2500.0 | 5000.0 | 7500.0 | 10000.0 | 13.51 | 9.25 | 58.60 | 53.43 |
| 2550.0 | 5100.0 | 7650.0 | 10200.0 | 13.44 | 9.08 | 57.37 | 54.76 |
| 2600.0 | 5200.0 | 7800.0 | 10400.0 | 13.14 | 8.81 | 59.85 | 52.88 |
| 2650.0 | 5300.0 | 7950.0 | 10600.0 | 13.01 | 8.70 | 56.56 | 52.64 |
| 2700.0 | 5400.0 | 8100.0 | 10800.0 | 13.49 | 7.81 | 57.77 | 51.11 |
| 2750.0 | 5500.0 | 8250.0 | 11000.0 | 13.69 | 7.38 | 55.00 | 50.86 |
| 2800.0 | 5600.0 | 8400.0 | 11200.0 | 13.83 | 7.11 | 54.80 | 51.32 |
| 2850.0 | 5700.0 | 8550.0 | 11400.0 | 14.07 | 6.75 | 53.99 | 53.51 |
| 2900.0 | 5800.0 | 8700.0 | 11600.0 | 14.11 | 6.47 | 52.81 | 53.17 |
| 2980.0 | 5960.0 | 8940.0 | 11920.0 | 14.05 | 5.91 | 53.09 | 52.89 |
| 3060.0 | 6120.0 | 9180.0 | 12240.0 | 14.18 | 5.54 | 51.83 | 52.00 |
| 3140.0 | 6280.0 | 9420.0 | 12560.0 | 14.74 | 4.69 | 50.37 | 51.24 |
| 3220.0 | 6440.0 | 9660.0 | 12880.0 | 14.69 | 4.29 | 50.18 | 51.47 |
| 3300.0 | 6600.0 | 9900.0 | 13200.0 | 14.21 | 4.22 | 48.21 | 51.27 |
| 3380.0 | 6760.0 | 10140.0 | 13520.0 | 14.45 | 3.81 | 47.96 | 49.66 |
| 3460.0 | 6920.0 | 10380.0 | 13840.0 | 15.08 | 2.98 | 47.56 | 47.35 |
| 3540.0 | 7080.0 | 10620.0 | 14160.0 | 14.72 | 3.00 | 48.44 | 47.30 |
| 3620.0 | 7240.0 | 10860.0 | 14480.0 | 14.42 | 3.01 | 48.11 | 46.88 |
| 3700.0 | 7400.0 | 11100.0 | 14800.0 | 15.29 | 1.86 | 43.02 | 44.88 |
| 3780.0 | 7560.0 | 11340.0 | 15120.0 | 16.36 | 0.35 | 41.57 | 44.74 |
| 3860.0 | 7720.0 | 11580.0 | 15440.0 | 16.09 | 0.11 | 42.26 | 47.92 |
| 3940.0 | 7880.0 | 11820.0 | 15760.0 | 15.75 | 0.20 | 41.92 | 52.27 |
| 4020.0 | 8040.0 | 12060.0 | 16080.0 | 15.15 | 0.82 | 42.96 | 56.38 |
| 4100.0 | 8200.0 | 12300.0 | 16400.0 | 15.12 | 0.16 | 41.93 | 58.01 |
| 4180.0 | 8360.0 | 12540.0 | 16720.0 | 15.03 | -0.10 | 42.78 | 59.01 |
| 4260.0 | 8520.0 | 12780.0 | 17040.0 | 14.93 | -0.22 | 42.10 | 60.60 |

* Harmonic Output below power level of X3 Output.



P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4851 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MIN-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. X1

RMK-3-1262+

9/15/2009

Page 5 of 6

Frequency Multiplier (Tripler)

RMK-3-1262+

Typical Performance Data

Test Conditions: RF Input Power = 11 dBm @ +85°C

| FREQUENCY (MHz) | | | | CONVERSION LOSS (dB) | HARMONIC OUTPUT* (-dBc) | | |
|-----------------|-----------|-----------|-----------|----------------------|-------------------------|-----------|-----------|
| X1 OUTPUT | X2 OUTPUT | X3 OUTPUT | X4 OUTPUT | | X3 OUTPUT | X1 OUTPUT | X2 OUTPUT |
| 2250.0 | 4500.0 | 6750.0 | 9000.0 | 16.24 | 8.76 | 60.78 | 55.07 |
| 2300.0 | 4600.0 | 6900.0 | 9200.0 | 15.94 | 8.90 | 57.39 | 53.66 |
| 2350.0 | 4700.0 | 7050.0 | 9400.0 | 16.04 | 8.29 | 58.54 | 56.91 |
| 2400.0 | 4800.0 | 7200.0 | 9600.0 | 15.57 | 8.50 | 57.42 | 55.72 |
| 2450.0 | 4900.0 | 7350.0 | 9800.0 | 15.48 | 8.25 | 57.98 | 54.70 |
| 2500.0 | 5000.0 | 7500.0 | 10000.0 | 15.14 | 8.32 | 59.12 | 53.03 |
| 2550.0 | 5100.0 | 7650.0 | 10200.0 | 14.85 | 8.46 | 57.37 | 53.21 |
| 2600.0 | 5200.0 | 7800.0 | 10400.0 | 14.99 | 7.72 | 60.05 | 53.41 |
| 2650.0 | 5300.0 | 7950.0 | 10600.0 | 14.65 | 7.85 | 56.00 | 52.19 |
| 2700.0 | 5400.0 | 8100.0 | 10800.0 | 15.46 | 6.53 | 56.90 | 52.49 |
| 2750.0 | 5500.0 | 8250.0 | 11000.0 | 15.32 | 6.49 | 54.93 | 52.55 |
| 2800.0 | 5600.0 | 8400.0 | 11200.0 | 15.70 | 5.93 | 54.41 | 51.80 |
| 2850.0 | 5700.0 | 8550.0 | 11400.0 | 15.50 | 6.04 | 54.99 | 52.55 |
| 2900.0 | 5800.0 | 8700.0 | 11600.0 | 15.77 | 5.50 | 52.80 | 51.43 |
| 2980.0 | 5960.0 | 8940.0 | 11920.0 | 15.84 | 4.94 | 52.65 | 51.83 |
| 3060.0 | 6120.0 | 9180.0 | 12240.0 | 15.92 | 4.49 | 51.42 | 51.86 |
| 3140.0 | 6280.0 | 9420.0 | 12560.0 | 16.26 | 3.87 | 50.44 | 51.21 |
| 3220.0 | 6440.0 | 9660.0 | 12880.0 | 16.63 | 3.13 | 49.69 | 50.65 |
| 3300.0 | 6600.0 | 9900.0 | 13200.0 | 16.54 | 2.62 | 48.02 | 49.15 |
| 3380.0 | 6760.0 | 10140.0 | 13520.0 | 16.74 | 2.23 | 47.66 | 47.76 |
| 3460.0 | 6920.0 | 10380.0 | 13840.0 | 17.12 | 1.70 | 47.74 | 46.36 |
| 3540.0 | 7080.0 | 10620.0 | 14160.0 | 17.00 | 1.51 | 48.28 | 46.15 |
| 3620.0 | 7240.0 | 10860.0 | 14480.0 | 16.90 | 1.31 | 46.70 | 47.08 |
| 3700.0 | 7400.0 | 11100.0 | 14800.0 | 17.42 | 0.55 | 42.51 | 47.51 |
| 3780.0 | 7560.0 | 11340.0 | 15120.0 | 17.17 | 0.30 | 43.15 | 48.55 |
| 3860.0 | 7720.0 | 11580.0 | 15440.0 | 17.14 | -0.12 | 43.66 | 50.90 |
| 3940.0 | 7880.0 | 11820.0 | 15760.0 | 16.78 | -0.11 | 43.22 | 53.43 |
| 4020.0 | 8040.0 | 12060.0 | 16080.0 | 16.57 | 0.11 | 43.54 | 57.19 |
| 4100.0 | 8200.0 | 12300.0 | 16400.0 | 16.52 | -0.53 | 42.85 | 59.21 |
| 4180.0 | 8360.0 | 12540.0 | 16720.0 | 16.61 | -0.91 | 43.11 | 61.90 |
| 4260.0 | 8520.0 | 12780.0 | 17040.0 | 17.08 | -1.55 | 41.96 | 67.15 |

* Harmonic Output below power level of X3 Output.



P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4851 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MIN-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. X1

RMK-3-1262+

9/15/2009


Page 6 of 6

Frequency Multiplier (Tripler)


RMK-3-1262+

Typical Performance Curves


Conversion Loss X3 Output @ RF IN =7dBm

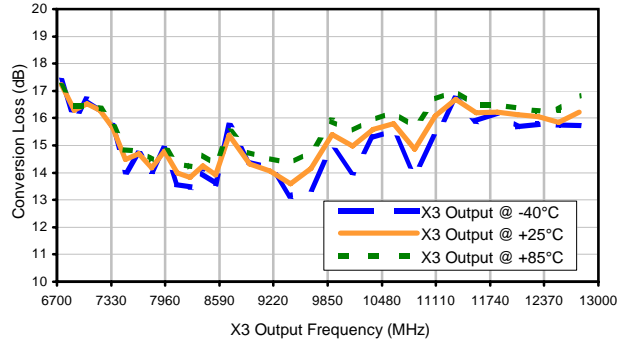


Harmonic X1 Output @ RF IN =7dBm

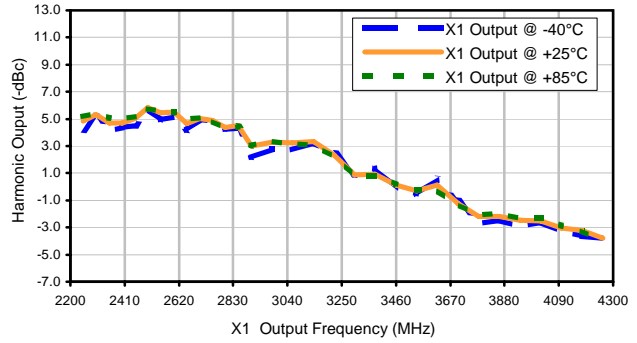

Harmonic X2 Output @ RF IN =7dBm

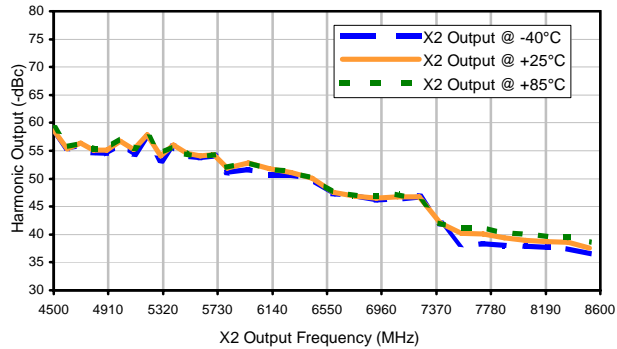

Harmonic X4 Output @ RF IN =7dBm

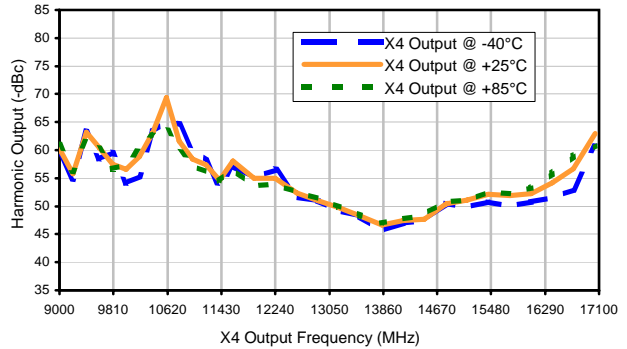

ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350186, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4851 For detailed performance specs & shopping online see Mini-Circuits web site







The Design Engineers Search Engine Provides ACTUAL Data Instantly From MIN-CIRCUITS At: www.minicircuits.com


IF/RF MICROWAVE COMPONENTS




Typical Performance Curves

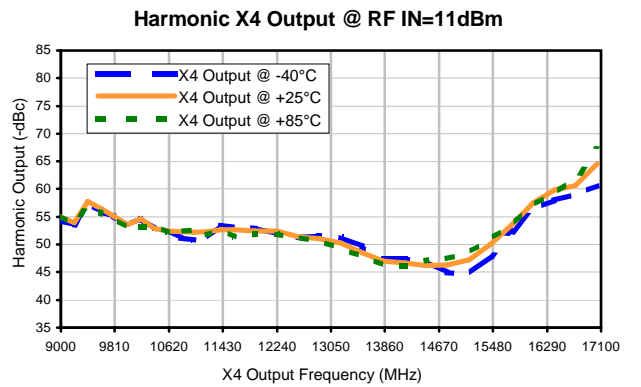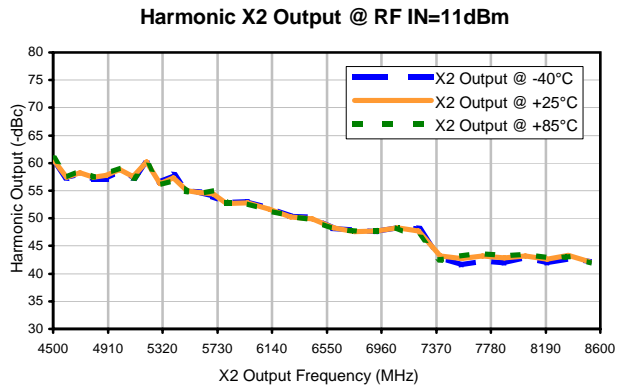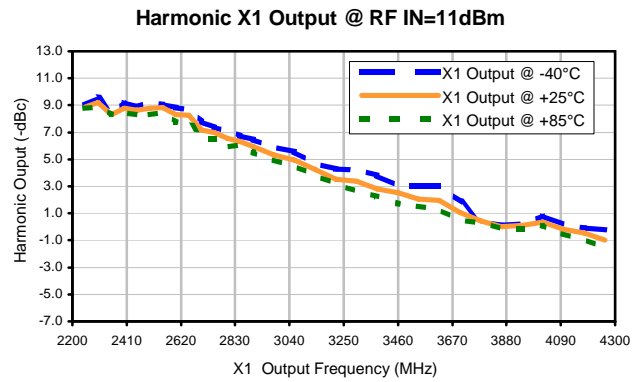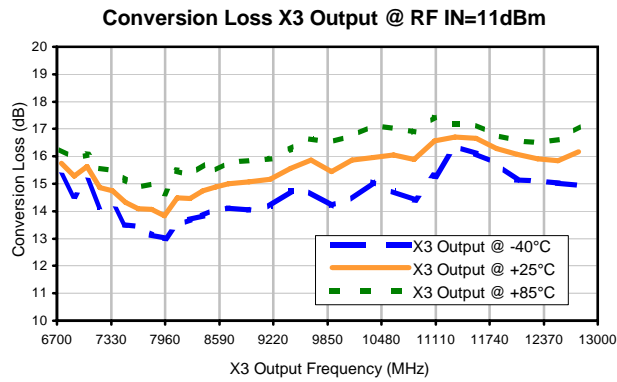

Outline Dimensions

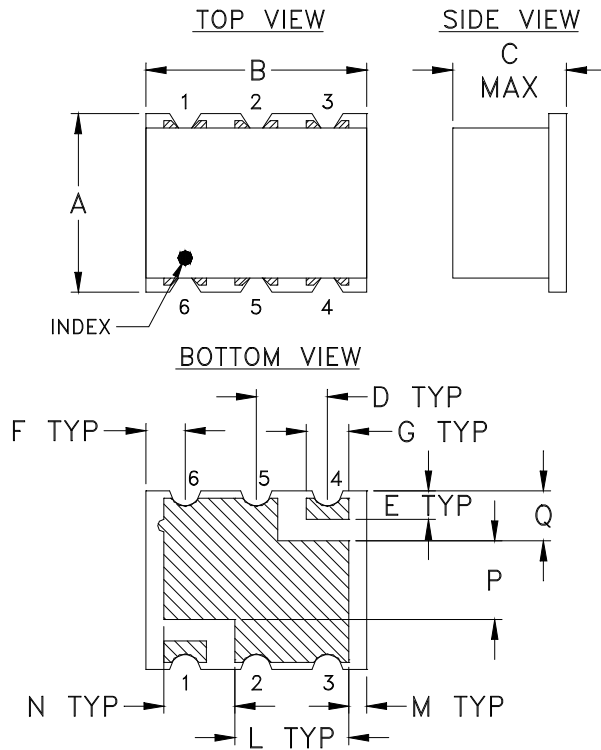

PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

| CASE # | A | B | C | D | E | F | G | H | J | K | L |
|--------|---------------|---------------|---------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| TT1224 | .25 (6.35) | .31 (7.87) | .16 (4.06) | .100 (2.54) | .040 (1.02) | .055 (1.40) | .060 (1.52) | .065 (1.65) | .300 (7.62) | .060 (1.52) | .160 (4.06) |

| CASE # | M | N | P | Q | WT. GRAM |
|--------|---------------|----------------|----------------|----------------|----------|
| TT1224 | .025 (.64) | .100 (2.54) | .110 (2.79) | .070 (1.78) | .16 |

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination: 2-10 μ inch (.05-.25 microns) Gold over 100-300 μ inch (2.54-7.62 microns) Nickel plate




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F2

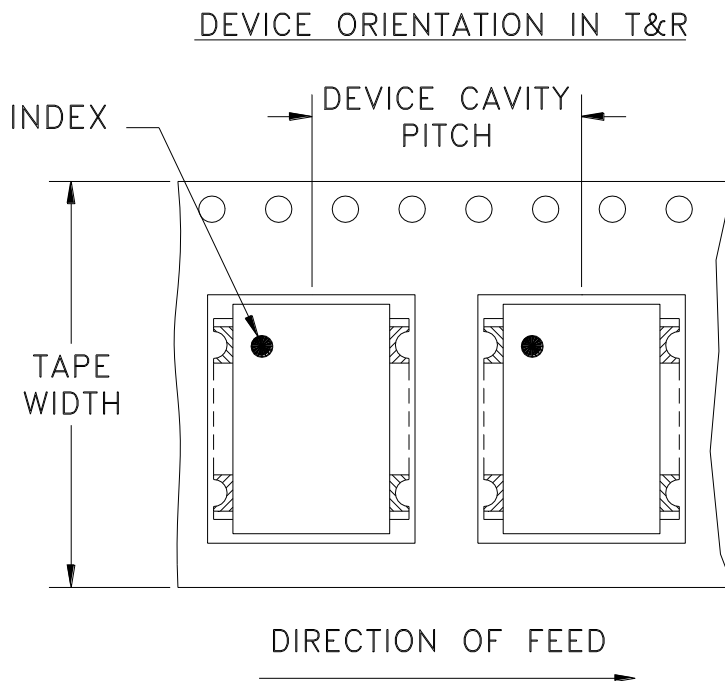

| Tape Width, mm | Device Cavity Pitch, mm | Reel Size, inches | Devices per Reel See note |
|----------------|-------------------------|-------------------|------------------------------|
| 16 | 12 | 7 | 10 |
| | | | 20 |
| | | | 50 |
| | | | 100 |
| | | | 200 |
| | | 13 | 500 |

Note: Please consult individual model data sheet to determine device per reel availability

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION




REVISIONS

| REV | ECN No. | DESCRIPTION | DATE | DR | AUTH |
|-----|---------|-------------|----------|----|------|
| OR | M108897 | NEW RELEASE | 01/04/07 | AV | DJ |
| | | | | | |
| | | | | | |

SUGGESTED MOUNTING CONFIGURATION
FOR TT1224 CASE STYLE "rv" PIN CONNECTION

.066 TRACE WIDTH, 3 PL.
(SEE NOTE BELOW)

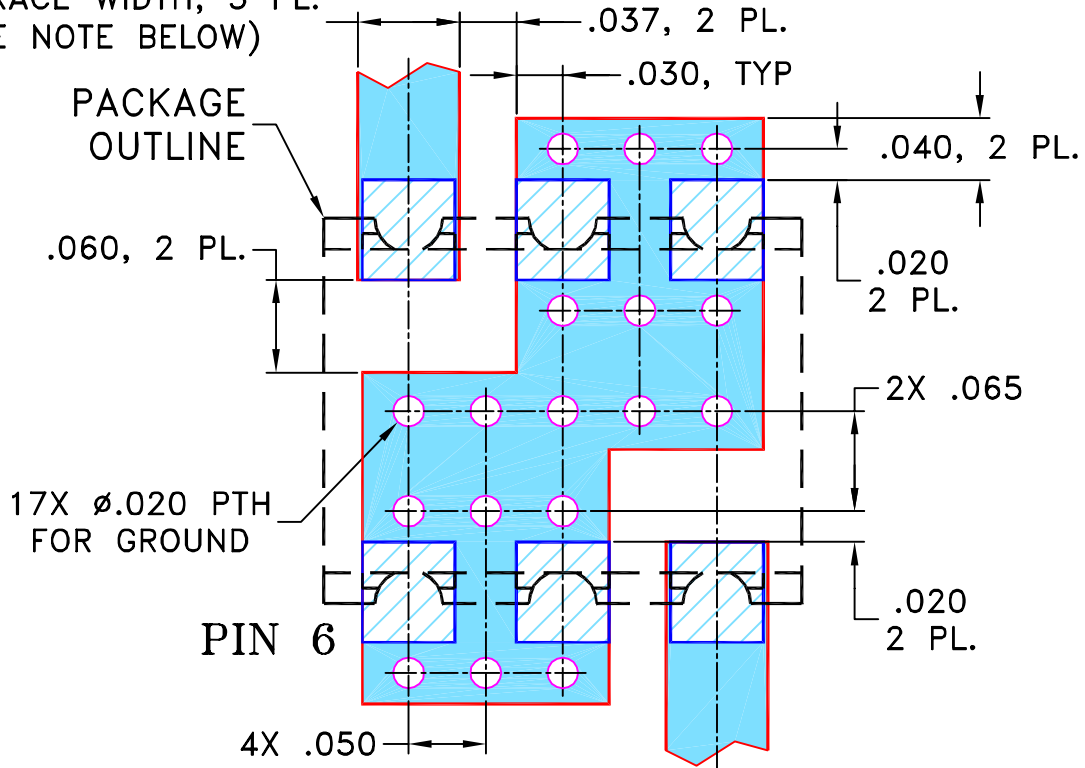

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

12/14/06

TOLERANCES ON:

CHECKED

IL

01/04/07

2 PL DECIMALS ± .005


APPROVED

DJ

01/04/07

ANGLES ±

FRACTIONS ±



THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, rv, TT1224, RMK-3-662+, TB-393

SIZE
A

CODE IDENT
15542

DRAWING NO:
98-PL-258


REV:
OR

FILE: 98PL258


SCALE: 8:1

SHEET: 1 OF 1

Evaluation Board and Circuit

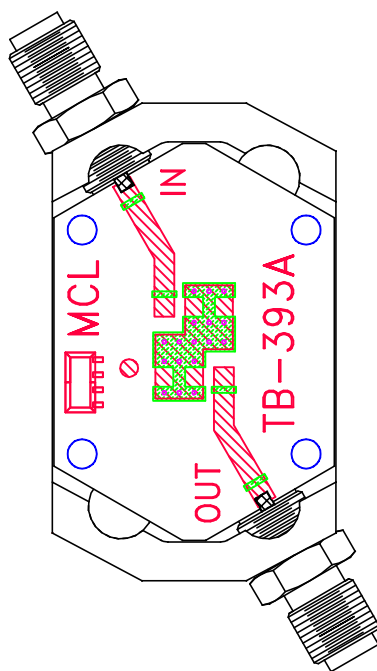


TB-393

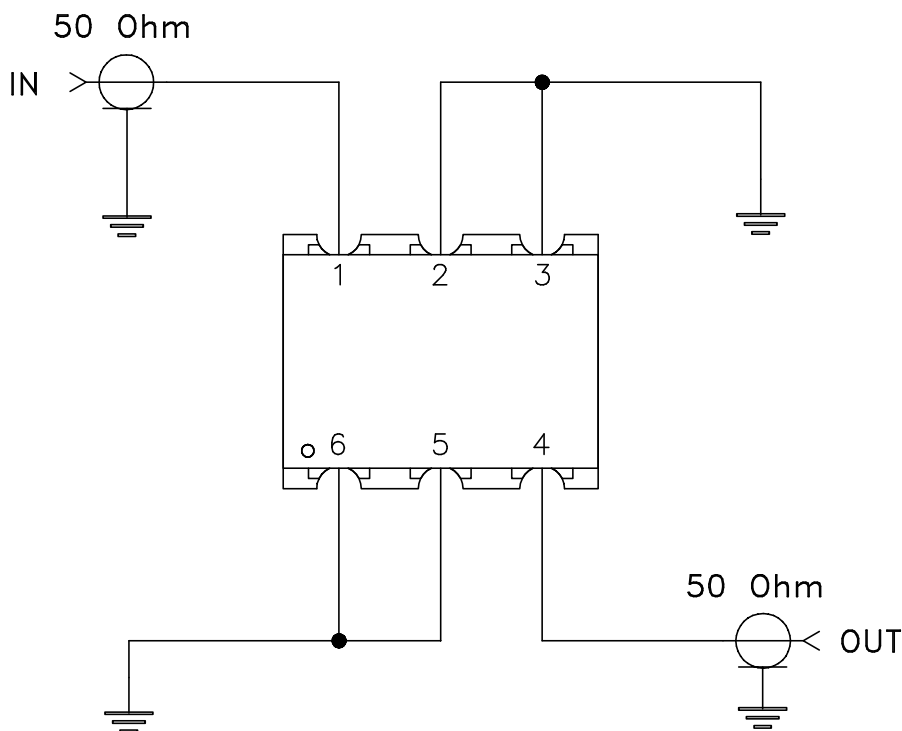

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent, Dielectric Constant=3.5, Thickness=.030 inch.

 Mini-Circuits®

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|--------------------------------|---|--|
| Operating Temperature | -40° to 85°C Ambient Environment | Individual Model Data Sheet |
| Storage Temperature | -55° to 100° C Ambient Environment | Individual Model Data Sheet |
| Humidity | 90 to 95% RH, 240 hours, 50°C | MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours |
| Thermal Shock | -55° to 100°C, 100 cycles | MIL-STD-202, Method 107, Condition A-3, except +100°C |
| Solder Reflow Heat | Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak | J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1 |
| Solderability | 10X Magnification | J-STD-002, 95% Coverage |
| Vibration (High Frequency) | 20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36) | MIL-STD-202, Method 204, Condition D |
| Mechanical Shock | 50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes | MIL-STD-202, Method 213, Condition A |
| Marking Resistance to Solvents | Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C | MIL-STD-202, Method 215 |