

WAVEGUIDE TO COAX

Adapter

WR19-EFR+

 50Ω 40 to 60 GHz Right-Angle 1.85mm Female to WR19 UG383/U Flange

THE BIG DEAL

- Full U-band Frequency Range, 40 to 60 GHz
- Low Insertion Loss, 0.8 dB typ.
- Excellent Return Loss, 20 dB typ.
- Compact Right-Angle Design
- Precision UG383/U Waveguide Flange
- 1.85mm-Female Connector



Generic photo used for illustration purposes only

Model No.	WR19-EFR+	
Case Style	UW3147	
Connector 1	Right-Angle 1.85mm-Female	
Connector 2	onnector 2 WR19 UG383/U Flange	

+RoHS Compliant

The +Suffix identifies RoHS Compliance. e our website for methodologies and qualifications

APPLICATIONS

- Waveguide Sub-system Rapid Prototyping
- R&D, Production, and OTA Test Systems
- 5G MIMO and Back Haul Radio Systems
- Test & Measurement Equipment
- SATCOM Systems

PRODUCT OVERVIEW

Mini-Circuits' WR19-EFR+ is a waveguide to coax adapter operating from 40 to 60 GHz. This product features a WR19 waveguide interface with a precision standard UG383/U flange to 1.85mm-Female coaxial connector. The WR19-EFR+ is machined from aluminum alloy 6061-T6 and gold-plated to ensure repeatable RF performance. This right-angle adapter has applications in R&D, production, over-the-air (OTA) mmWave test laboratories as well as in U-Band communication and SATCOM systems.

KEY FEATURES

Feature	Advantages	
Wideband, 40 to 60 GHz	Full operating frequency range of WR19 waveguide	
Low Insertion Loss, 0.8 dB typ. Excellent Return Loss, 20 dB typ.	Provides a near transparent transition for critical coax to waveguide transition requirements	
Precision machined with outstanding surface finish	Mini-Circuits mmWave waveguide to coaxial adapters utilize high precision machining for repeatable performance over full waveguide bands. The highly polished, match-machined surfaces are gold plated to 20 μinches minimum over 100 μinches minimum of nickel.	

REV. OR ECO-015832 WR19-EFR+ MCL NY 251030





WAVEGUIDE TO COAX

Adapter

WR19-EFR+

 50Ω 40 to 60 GHz Right-Angle 1.85mm Female to WR19 UG383/U Flange

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Condition (GHz)	Min.	Тур.	Max.	Units
Frequency Range		40		60	GHz
Insertion Loss¹	40 - 60	_	0.8	_	dB
Return Loss ²	40 - 60	_	20.0	15.0	dB


^{1.} Insertion loss is measured as return loss on coax port, with a short on waveguide port. Results are divided by 2.

ABSOLUTE MAXIMUM RATINGS³

Parameter	Ratings
Operating Case Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

^{3.} Permanent damage may occur if any of these limits are exceeded.

OUTLINE DRAWING

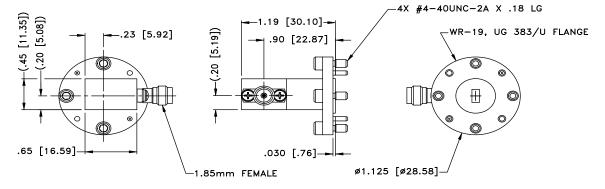

Weight: 25 grams

Dimensions are in inches [mm]. Tolerances 2PI±.02; 3 PI ±.010

^{2.} Tested on coax port, with termination on waveguide port.




I Mini-Circuits


WR19-EFR+

 50Ω 40 to 60 GHz Right-Angle 1.85mm Female to WR19 UG383/U Flange

TYPICAL PERFORMANCE DATA / CHARTS

Frequency (GHz)	Insertion Loss (dB)	Return Loss (dB)
40	0.73	19.27
41	0.65	20.18
42	0.69	19.41
43	0.72	17.47
44	0.67	17.78
45	0.72	21.48
46	0.71	22.96
47	0.69	31.81
48	0.69	26.33
49	0.71	21.04
50	0.75	19.81
51	0.72	19.81
52	0.76	19.18
53	0.75	23.10
54	0.75	27.27
55	0.77	22.94
56	0.78	20.92
57	0.82	18.54
58	0.82	21.84
59	0.84	35.90
60	0.88	31.93

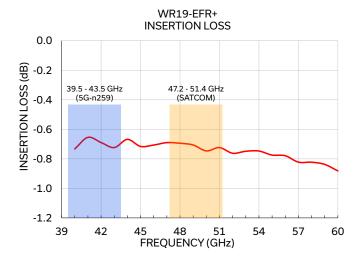

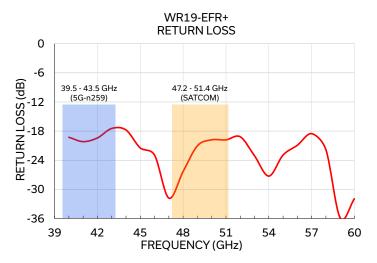

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




Typical Performance Data

FREQUENCY	INSERTION LOSS	RETURN LOSS
(GHz)	(dB)	(dB)
40.0	-0.73	-19.27
40.5	-0.67	-19.49
41.0	-0.65	-20.18
41.5	-0.70	-20.36
42.0	-0.69	-19.41
42.5	-0.66	-18.14
43.0	-0.72	-17.47
43.5	-0.73	-17.31
44.0	-0.67	-17.78
44.5	-0.71	-19.39
45.0	-0.72	-21.48
45.5	-0.68	-22.42
46.0	-0.71	-22.96
46.5	-0.71	-25.19
47.0	-0.69	-31.81
47.5	-0.70	-38.96
48.0	-0.69	-26.33
48.5	-0.70	-22.46
49.0	-0.71	-21.04
49.5	-0.71	-20.36
50.0	-0.75	-19.81
50.5	-0.74	-19.72
51.0	-0.72	-19.81
51.5	-0.76	-19.14
52.0	-0.76	-19.18
52.5	-0.74	-20.41
53.0	-0.75	-23.10
53.5	-0.75	-26.50
54.0	-0.75	-27.27
54.5	-0.76	-24.81
55.0	-0.77	-22.94
55.5	-0.79	-21.03
56.0	-0.78	-20.92
56.5	-0.79	-19.73
57.0	-0.82	-18.54
57.5	-0.82	-19.20
58.0	-0.82	-21.84
58.5	-0.84	-28.42
59.0	-0.84	-35.90
59.5	-0.84	-33.23
60.0	-0.88	-31.93



Typical Performance Curves



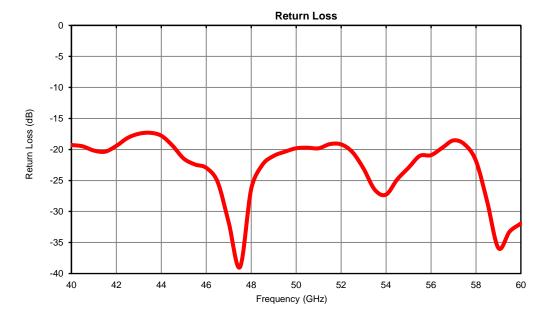






Outline Dimensions

UW3147

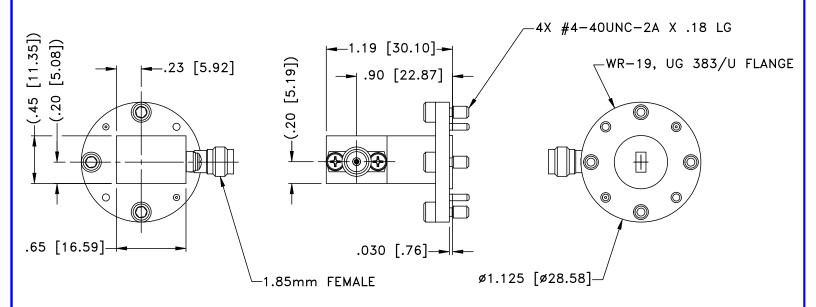

Dimensions are in inches (mm). Tolerances: 2 Pl ±.02; 3 Pl ±.010

Weight: 25 grams

Notes:

1. Case material: Aluminum Alloy.

2. Case finish: Gold plating;





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



ENV131



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec	
Operating Temperature	-40° to 85° C Ambient Environment	Individual Model Data Sheet	
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet	
Thermal Shock	-55° to 100°C, 5 cycles	MIL-STD-202, Method 107, Condition B except over - 55° to 100°C	

ENV131 Rev: OR 1

11/19/21 EC

ECO-10582File: ENV131.pdf