

Frequency Mixer

ZX05-ED12902/6

Level 7 (LO Power + 7 dBm)

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.


CASE STYLE : FL905

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	2300		8000	MHz
	RF (fL to fU)	2300		8000	MHz
	IF	10		3000	MHz
Conversion Loss	Total Range		6		dB
LO-RF Isolation			25		dB
LO-IF Isolation			22		dB
Input IP3			+11.5		dBm
1 dB Compression			+1		dBm

MAXIMUM RATINGS	
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

COAXIAL CONNECTIONS	
LO	2
RF	3
IF	1

Electrical Schematics

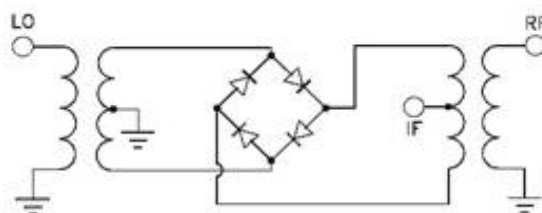

Frequency Mixer

ZX05-ED12902/6

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)		
		@LO (dBm)		
		+4	+7	+10
1500.1	1530.1	18.18	11.14	7.84
1680.1	1710.1	13.70	8.72	6.85
1860.1	1890.1	10.82	7.92	6.71
2040.1	2070.1	9.15	7.43	6.67
2220.1	2250.1	7.57	6.62	6.20
2400.1	2430.1	6.94	6.49	6.20
2580.1	2610.1	6.77	6.56	6.45
2760.1	2790.1	6.62	6.33	6.20
2940.1	2970.1	6.53	6.28	6.19
3120.1	3150.1	6.52	6.22	6.06
3300.1	3330.1	6.57	6.22	6.08
3480.1	3510.1	6.58	6.19	6.03
3660.1	3690.1	6.25	5.96	5.86
3840.1	3870.1	6.19	5.98	5.90
4020.1	4050.1	6.08	5.89	5.81
4200.1	4230.1	6.07	5.81	5.67
4380.1	4410.1	5.88	5.61	5.50
4560.1	4590.1	5.71	5.47	5.36
4720.1	4750.1	6.05	5.77	5.64
4900.1	4930.1	6.54	6.05	5.74
5060.1	5090.1	6.58	6.11	5.82
5240.1	5270.1	6.23	5.83	5.62
5400.1	5430.1	5.95	5.57	5.37
5580.1	5610.1	5.82	5.40	5.23
5740.1	5770.1	5.95	5.46	5.30
5920.1	5950.1	5.78	5.40	5.30
6080.1	6110.1	5.89	5.41	5.29
6260.1	6290.1	5.91	5.51	5.40
6420.1	6450.1	6.04	5.65	5.51
6600.1	6630.1	6.12	5.77	5.58
6760.1	6790.1	5.94	5.66	5.56
6940.1	6970.1	5.82	5.62	5.58
7100.1	7130.1	5.95	5.73	5.68
7280.1	7310.1	6.02	5.72	5.65
7440.1	7470.1	6.59	6.08	5.85
7620.1	7650.1	7.09	6.29	5.96
7780.1	7810.1	7.40	6.46	6.13
7960.1	7990.1	8.07	6.87	6.68
8120.1	8150.1	8.45	7.74	8.19
8300.1	8330.1	11.16	10.87	10.66

RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)		
		@LO (dBm)		
		+4	+7	+10
1500.1	1530.1	-6.78	0.75	7.25
1680.1	1710.1	-4.36	0.64	4.59
1860.1	1890.1	-1.82	3.43	12.08
2040.1	2070.1	3.06	8.66	12.77
2220.1	2250.1	7.74	11.68	13.07
2400.1	2430.1	9.61	10.66	11.12
2580.1	2610.1	9.76	9.56	9.18
2760.1	2790.1	10.23	10.41	11.18
2940.1	2970.1	12.96	11.63	9.82
3120.1	3150.1	16.47	16.76	14.74
3300.1	3330.1	17.90	16.40	16.90
3480.1	3510.1	12.10	11.49	15.52
3660.1	3690.1	9.89	12.46	16.29
3840.1	3870.1	14.52	18.09	21.05
4020.1	4050.1	16.39	19.82	21.09
4200.1	4230.1	10.89	12.20	12.96
4380.1	4410.1	11.84	12.85	14.54
4560.1	4590.1	14.43	14.53	14.58
4720.1	4750.1	12.80	13.38	14.09
4900.1	4930.1	11.53	10.39	9.77
5060.1	5090.1	8.87	9.36	9.87
5240.1	5270.1	8.30	9.57	9.53
5400.1	5430.1	7.39	9.23	9.66
5580.1	5610.1	6.63	8.78	9.81
5740.1	5770.1	6.38	8.32	9.79
5920.1	5950.1	8.03	8.31	9.99
6080.1	6110.1	8.68	8.67	10.45
6260.1	6290.1	11.07	10.57	11.16
6420.1	6450.1	12.17	11.84	11.79
6600.1	6630.1	10.57	11.15	11.63
6760.1	6790.1	11.08	13.02	13.73
6940.1	6970.1	12.65	14.56	14.70
7100.1	7130.1	11.13	12.82	14.33
7280.1	7310.1	12.95	11.74	13.63
7440.1	7470.1	13.32	13.50	13.27
7620.1	7650.1	8.82	9.66	10.53
7780.1	7810.1	7.45	9.32	7.53
7960.1	7990.1	4.63	6.52	4.76
8120.1	8150.1	1.73	3.90	7.03
8300.1	8330.1	2.59	11.69	16.30

RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+1dBm (dB)		
		@LO (dBm)		
		+4	+7	+10
1500.1	1530.1	-3.09	1.03	1.74
1680.1	1710.1	0.02	1.94	1.57
1860.1	1890.1	1.47	1.86	1.60
2040.1	2070.1	1.35	1.63	1.42
2220.1	2250.1	1.78	1.62	1.39
2400.1	2430.1	1.61	1.32	1.11
2580.1	2610.1	1.15	0.92	0.80
2760.1	2790.1	0.89	0.78	0.78
2940.1	2970.1	0.89	0.69	0.62
3120.1	3150.1	0.67	0.52	0.46
3300.1	3330.1	0.55	0.45	0.37
3480.1	3510.1	0.59	0.44	0.29
3660.1	3690.1	0.60	0.29	0.17
3840.1	3870.1	0.54	0.26	0.19
4020.1	4050.1	0.55	0.32	0.23
4200.1	4230.1	0.82	0.54	0.37
4380.1	4410.1	0.78	0.57	0.46
4560.1	4590.1	0.69	0.45	0.33
4720.1	4750.1	1.02	0.71	0.57
4900.1	4930.1	1.35	1.10	0.96
5060.1	5090.1	1.38	1.13	1.00
5240.1	5270.1	1.42	1.24	1.12
5400.1	5430.1	1.37	1.19	1.08
5580.1	5610.1	1.31	1.11	1.02
5740.1	5770.1	1.24	0.96	0.88
5920.1	5950.1	1.14	0.94	0.86
6080.1	6110.1	0.88	0.69	0.61
6260.1	6290.1	0.80	0.66	0.53
6420.1	6450.1	0.83	0.68	0.60
6600.1	6630.1	0.77	0.71	0.74
6760.1	6790.1	0.85	0.76	0.81
6940.1	6970.1	0.81	0.63	0.66
7100.1	7130.1	0.73	0.56	0.60
7280.1	7310.1	0.74	0.47	0.35
7440.1	7470.1	1.03	0.81	0.73
7620.1	7650.1	1.36	1.50	1.72
7780.1	7810.1	1.56	1.60	1.86
7960.1	7990.1	1.68	1.74	1.92
8120.1	8150.1	2.51	1.84	1.35
8300.1	8330.1	2.46	0.96	0.58

REV. X2

ZX05-ED12902/6

101011

Page 1 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant
P.O. Box 350186, Brooklyn, New York 11235-0008 (718) 934-4500 Fax (718) 332-4861



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Frequency Mixer

ZX05-ED12902/6

Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=5150MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=2190MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=8010.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+7			+7			+7
3649.9	1500.1	12.42	110.1	2300.1	6.36	3710.0	4300.1	10.48
3456.1	1693.9	11.62	210.1	2400.1	6.08	3610.0	4400.1	9.79
3262.2	1887.8	9.68	310.1	2500.1	6.17	3510.0	4500.1	9.09
3068.4	2081.6	8.76	410.1	2600.1	6.21	3410.0	4600.1	8.24
2874.5	2275.5	7.98	510.1	2700.1	6.17	3310.0	4700.1	8.15
2680.7	2469.3	6.73	610.1	2800.1	6.02	3210.0	4800.1	8.08
2486.9	2663.1	5.72	710.1	2900.1	6.02	3110.0	4900.1	8.04
2293.0	2857.0	6.27	810.1	3000.1	5.98	3010.0	5000.1	8.09
2099.2	3050.8	7.01	910.1	3100.1	6.08	2910.0	5100.1	8.08
1905.3	3244.7	7.74	1010.1	3200.1	6.21	2810.0	5200.1	8.10
1711.5	3438.5	8.53	1110.1	3300.1	6.52	2710.0	5300.1	8.07
1517.7	3632.3	7.49	1210.1	3400.1	7.00	2610.0	5400.1	7.81
1323.8	3826.2	6.82	1310.1	3500.1	7.21	2510.0	5500.1	7.55
1130.0	4020.0	6.43	1410.1	3600.1	7.08	2410.0	5600.1	7.43
936.1	4213.9	6.36	1510.1	3700.1	7.08	2310.0	5700.1	7.45
742.3	4407.7	6.22	1610.1	3800.1	7.36	2210.0	5800.1	7.63
548.4	4601.6	5.99	1710.1	3900.1	7.22	2110.0	5900.1	7.82
354.6	4795.4	6.02	1810.1	4000.1	7.11	2010.0	6000.1	7.89
182.3	4967.7	5.78	1910.1	4100.1	7.05	1910.0	6100.1	7.85
10.0	5160.0	6.33	2010.1	4200.1	7.16	1810.0	6200.1	7.80
157.8	5307.8	5.84	2110.1	4300.1	7.28	1730.0	6280.1	7.66
324.0	5474.0	5.86	2210.1	4400.1	7.49	1630.0	6380.1	7.47
471.8	5621.8	5.85	2310.1	4500.1	7.51	1550.0	6460.1	7.41
638.0	5788.0	6.16	2410.1	4600.1	7.56	1450.0	6560.1	7.25
785.8	5935.8	6.13	2510.1	4700.1	7.70	1370.0	6640.1	7.22
952.0	6102.0	6.44	2610.1	4800.1	7.81	1270.0	6740.1	7.12
1099.8	6249.8	6.60	2710.1	4900.1	7.97	1190.0	6820.1	6.92
1266.0	6416.0	6.74	2810.1	5000.1	8.04	1090.0	6920.1	6.91
1413.8	6563.8	7.08	2910.1	5100.1	7.96	1010.0	7000.1	6.78
1580.1	6730.0	7.38	3010.1	5200.1	7.83	910.0	7100.1	6.75
1727.8	6877.8	7.20	3090.1	5280.1	7.80	830.0	7180.1	6.74
1894.1	7044.1	7.29	3190.1	5380.1	7.52	730.0	7280.1	6.71
2041.8	7191.8	7.20	3270.1	5460.1	7.72	650.0	7360.1	6.62
2208.1	7358.1	7.43	3370.1	5560.1	7.92	550.0	7460.1	6.51
2355.8	7505.8	7.52	3450.1	5640.1	8.09	470.0	7540.1	6.41
2522.1	7672.1	7.33	3550.1	5740.1	8.25	370.0	7640.1	6.11
2669.8	7819.8	7.58	3630.1	5820.1	8.63	290.0	7720.1	6.14
2836.1	7986.1	8.10	3730.1	5920.1	9.11	190.0	7820.1	6.30
2983.9	8133.9	9.84	3810.1	6000.1	9.72	110.0	7900.1	6.52
3150.1	8300.1	13.24	3910.1	6100.1	10.66	10.0	8000.1	7.14

Frequency Mixer

ZX05-ED12902/6

Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+4	+7	+10	+4	+7	+10
1530.1	48.75	42.90	36.95	21.84	22.22	22.83
1710.1	45.22	40.77	35.63	19.81	20.08	21.37
1890.1	37.62	33.70	31.76	17.96	19.22	21.21
2070.1	33.05	32.03	31.95	17.19	19.24	21.33
2250.1	34.66	34.58	34.80	17.74	19.97	22.13
2430.1	37.35	37.62	37.29	18.80	21.27	23.38
2610.1	38.73	37.99	36.80	20.30	22.54	24.03
2790.1	33.32	32.63	31.77	21.65	23.19	23.24
2970.1	32.09	30.28	29.08	22.34	23.37	23.26
3150.1	30.84	29.37	28.03	23.88	23.84	22.29
3330.1	31.01	28.95	27.61	26.19	24.48	22.91
3510.1	31.15	29.29	27.86	26.98	24.29	22.75
3690.1	30.98	29.05	27.85	27.74	25.22	23.85
3870.1	31.21	29.54	28.61	30.14	27.94	26.94
4050.1	31.91	30.82	29.47	32.70	32.69	32.25
4230.1	29.68	29.14	28.52	30.63	31.31	31.74
4410.1	28.42	27.95	27.75	24.16	23.21	22.79
4590.1	27.34	26.79	26.65	19.00	18.21	17.97
4750.1	27.42	27.03	26.95	16.56	16.12	16.04
4930.1	26.74	26.51	26.39	15.72	15.69	15.69
5090.1	25.94	25.50	25.42	15.92	16.05	16.33
5270.1	24.87	24.55	24.30	16.39	16.95	17.35
5430.1	23.94	23.59	23.30	17.02	17.91	18.57
5610.1	23.49	22.83	22.34	18.09	19.23	20.19
5770.1	23.33	22.09	21.40	19.29	20.59	21.93
5950.1	22.34	21.62	20.67	20.67	22.41	24.13
6110.1	21.80	20.58	19.73	22.60	24.40	26.30
6290.1	20.99	19.93	18.76	24.88	27.11	29.24
6450.1	20.59	19.76	18.68	25.84	26.31	26.68
6630.1	20.07	19.50	18.62	26.35	25.33	24.59
6790.1	19.92	19.83	19.00	28.42	27.20	26.12
6970.1	19.51	19.30	19.17	34.37	33.17	32.26
7130.1	18.71	19.16	19.16	28.39	28.59	28.68
7310.1	19.08	19.60	19.40	22.35	21.89	21.41
7470.1	19.50	20.09	20.35	18.86	18.42	18.11
7650.1	20.27	20.75	21.16	18.68	18.54	18.64
7810.1	20.07	20.56	21.02	15.75	15.19	15.40
7990.1	21.19	21.58	22.01	12.55	11.56	12.01
8150.1	23.19	23.54	23.48	10.18	9.17	9.69
8330.1	24.22	23.28	23.20	8.27	7.91	8.15

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+4	+7	+10
1500.1	1530.1	21.65	26.43	39.20
1679.8	1709.8	20.20	18.75	13.81
1859.6	1889.6	16.45	12.12	10.22
2039.3	2069.3	12.86	11.11	10.40
2219.0	2249.0	13.42	12.09	11.48
2398.8	2428.8	15.37	14.36	13.70
2578.5	2608.5	18.12	17.51	17.15
2758.3	2788.3	19.77	19.20	18.98
2938.0	2968.0	20.95	20.73	20.39
3117.7	3147.7	21.67	21.55	20.93
3297.5	3327.5	21.24	20.94	20.51
3477.2	3507.2	20.31	19.78	19.32
3656.9	3686.9	20.10	19.74	19.28
3836.7	3866.7	20.36	20.14	19.93
4016.4	4046.4	20.99	20.79	20.58
4196.2	4226.2	23.38	23.03	22.74
4375.9	4405.9	28.08	27.40	26.83
4555.6	4585.6	31.93	31.25	30.58
4735.4	4765.4	34.67	34.19	33.99
4915.1	4945.1	30.51	30.11	29.87
5094.8	5124.8	27.18	27.04	26.86
5274.6	5304.6	24.45	24.15	23.94
5434.3	5464.3	23.57	23.23	23.05
5614.1	5644.1	22.93	22.65	22.40
5773.8	5803.8	22.82	22.42	22.32
5953.6	5983.6	23.99	23.07	22.58
6113.3	6143.3	24.04	23.47	22.99
6293.1	6323.1	22.10	21.05	20.49
6452.8	6482.8	24.73	23.19	22.24
6632.6	6662.6	29.18	27.87	26.86
6792.4	6822.4	31.42	29.81	28.71
6972.1	7002.1	37.73	35.23	33.27
7131.9	7161.9	47.21	46.45	38.07
7311.6	7341.6	39.61	38.66	34.28
7471.4	7501.4	29.70	28.29	28.29
7651.1	7681.1	24.60	25.60	25.43
7810.9	7840.9	26.75	28.79	29.26
7990.6	8020.6	24.14	27.85	29.92
8150.4	8180.4	22.63	26.47	27.09
8330.1	8360.1	24.84	25.93	24.45

Frequency Mixer

ZX05-ED12902/6

Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)			LO (MHz)	LO VSWR (:1)			IF (OUT) (MHz)	IF VSWR @LO=8000MHz (:1)		
		@LO (dBm)				@LO (dBm)				@LO (dBm)		
		+4	+7	+10		+4	+7	+10		+4	+7	+10
1500.1	1530.1	7.17	3.89	2.67	1530.1	31.60	28.03	22.00	10.0	1.51	1.05	1.24
1679.8	1709.8	3.98	2.45	1.90	1710.1	26.74	22.58	15.00	89.8	1.51	1.11	1.27
1859.6	1889.6	2.82	1.84	1.44	1890.1	19.11	11.85	8.51	169.5	1.54	1.17	1.31
2039.3	2069.3	2.56	2.00	1.75	2070.1	8.99	6.26	6.03	269.3	1.69	1.31	1.37
2219.0	2249.0	2.71	2.33	2.15	2250.1	4.72	4.26	4.63	349.0	1.80	1.42	1.44
2398.8	2428.8	3.02	2.83	2.69	2430.1	2.96	3.06	3.63	448.7	2.02	1.57	1.51
2578.5	2608.5	3.23	3.14	3.09	2610.1	2.15	2.40	3.00	528.5	2.21	1.69	1.58
2758.3	2788.3	3.34	3.17	3.08	2790.1	1.81	2.08	2.65	628.2	2.46	1.87	1.68
2938.0	2968.0	3.43	3.17	3.02	2970.1	1.81	2.02	2.53	708.0	2.66	2.00	1.78
3117.7	3147.7	3.48	3.18	2.92	3150.1	1.81	2.02	2.52	807.7	2.95	2.19	1.92
3297.5	3327.5	3.40	3.07	2.82	3330.1	1.85	2.10	2.61	887.5	3.15	2.34	2.03
3477.2	3507.2	2.97	2.54	2.30	3510.1	2.07	2.30	2.76	987.2	3.51	2.58	2.20
3656.9	3686.9	2.53	2.28	2.11	3690.1	2.05	2.26	2.78	1067.0	3.75	2.75	2.33
3836.7	3866.7	2.46	2.25	2.12	3870.1	1.93	2.30	2.91	1166.7	3.99	2.92	2.44
4016.4	4046.4	2.48	2.29	2.15	4050.1	1.93	2.47	3.18	1246.5	4.15	3.03	2.53
4196.2	4226.2	2.74	2.53	2.36	4230.1	1.90	2.57	3.40	1346.2	4.32	3.09	2.55
4375.9	4405.9	2.66	2.39	2.23	4410.1	1.99	2.74	3.63	1425.9	4.51	3.21	2.66
4555.6	4585.6	2.18	1.95	1.79	4590.1	2.09	2.86	3.75	1525.7	4.73	3.29	2.70
4735.4	4765.4	2.33	2.14	2.02	4750.1	2.17	2.88	3.71	1605.4	4.92	3.40	2.77
4915.1	4945.1	2.87	2.62	2.42	4930.1	2.35	2.97	3.73	1705.1	5.07	3.46	2.78
5094.8	5124.8	2.78	2.56	2.39	5090.1	2.53	3.08	3.81	1784.9	5.30	3.64	2.89
5274.6	5304.6	2.55	2.35	2.19	5270.1	2.79	3.10	3.67	1884.6	5.51	3.71	2.92
5434.3	5464.3	2.47	2.24	2.10	5430.1	3.04	3.17	3.61	1964.4	5.63	3.79	2.97
5614.1	5644.1	2.33	2.11	1.99	5610.1	3.23	3.11	3.40	2064.1	5.66	3.79	2.94
5773.8	5803.8	2.26	2.05	1.95	5770.1	3.31	2.95	3.04	2143.9	5.63	3.76	2.93
5953.6	5983.6	2.18	1.92	1.84	5950.1	3.09	2.57	2.51	2243.6	5.51	3.69	2.86
6113.3	6143.3	2.21	1.95	1.83	6110.1	2.70	2.18	2.05	2323.4	5.38	3.60	2.80
6293.1	6323.1	2.20	1.97	1.83	6290.1	2.17	1.69	1.59	2423.1	5.14	3.48	2.72
6452.8	6482.8	2.27	2.03	1.87	6450.1	1.77	1.32	1.35	2502.9	4.98	3.39	2.69
6632.6	6662.6	2.32	2.13	1.98	6630.1	1.32	1.10	1.45	2602.6	4.67	3.23	2.61
6792.4	6822.4	2.15	2.00	1.90	6790.1	1.08	1.34	1.78	2682.3	4.39	3.10	2.57
6972.1	7002.1	2.10	1.99	1.92	6970.1	1.18	1.64	2.17	2782.1	4.15	3.00	2.55
7131.9	7161.9	2.12	2.02	1.97	7130.1	1.58	1.97	2.51	2861.8	3.88	2.94	2.60
7311.6	7341.6	1.95	1.75	1.66	7310.1	2.15	2.45	2.94	2961.5	3.79	2.96	2.70
7471.4	7501.4	2.45	2.07	1.85	7470.1	2.65	2.87	3.29	3041.3	3.58	2.94	2.80
7651.1	7681.1	2.92	2.52	2.29	7650.1	3.27	3.30	3.66	3141.0	3.53	3.04	3.04
7810.9	7840.9	3.00	2.56	2.31	7810.1	4.00	3.63	3.81	3220.8	3.27	3.02	3.18
7990.6	8020.6	3.11	2.56	2.29	7990.1	4.21	3.60	3.60	3320.5	3.24	3.24	3.60
8150.4	8180.4	2.87	2.31	2.22	8150.1	3.70	3.26	3.28	3400.3	3.13	3.42	3.96
8330.1	8360.1	2.54	2.54	2.56	8330.1	2.85	2.82	2.80	3500.0	3.18	3.80	4.59

REV. X2

ZX05-ED12902/6

101011

Page 4 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+11	11	18	27	---	---	---	---	---	---
1	-	20	+0	35	20	33	45	---	---	---	---	---
2	>90	51	55	51	51	53	51	>70	---	---	---	---
3	>90	57	55	>70	57	>70	>70	64	>70	---	---	---
4	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	---	---
5	---	---	>70	>70	>70	>70	>70	>70	>70	>70	>70	---
6	---	---	---	>70	>70	>70	>70	>70	>70	>70	>70	>70
7	---	---	---	---	>70	>70	>70	>70	>70	>70	>70	>70
8	---	---	---	---	---	>70	>70	>70	>70	>70	>70	>70
9	---	---	---	---	---	---	>70	>70	>70	>70	>70	>70
10	---	---	---	---	---	---	---	>70	>70	>70	>70	>70
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 5150 MHz; -14.00 dBm.
LO IN: 5180 MHz; +7.00 dBm
IF OUT: 30 MHz; -20.15 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+1	20	28	39	---	---	---	---	---	---
1	-	19	+0	36	20	39	47	---	---	---	---	---
2	71	42	45	38	42	55	45	59	---	---	---	---
3	>90	36	34	60	35	60	53	49	59	---	---	---
4	>90	68	58	54	66	50	63	58	58	71	---	---
5	---	---	77	65	60	76	56	>80	68	63	76	---
6	---	---	---	>80	>80	70	>80	63	79	71	70	>80
7	---	---	---	---	>80	>80	78	>80	71	>80	78	76
8	---	---	---	---	---	>80	>80	>80	>80	74	>80	>80
9	---	---	---	---	---	---	>80	>80	>80	>80	>80	>80
10	---	---	---	---	---	---	---	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10


LO HARMONICS ORDER

Test conditions: RF IN: 5150 MHz; -4.00 dBm.
LO IN: 5180 MHz; +7.00 dBm
IF OUT: 30 MHz; -10.12 dBm


- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Typical Performance Curves


Conversion Loss @ IF=30MHz

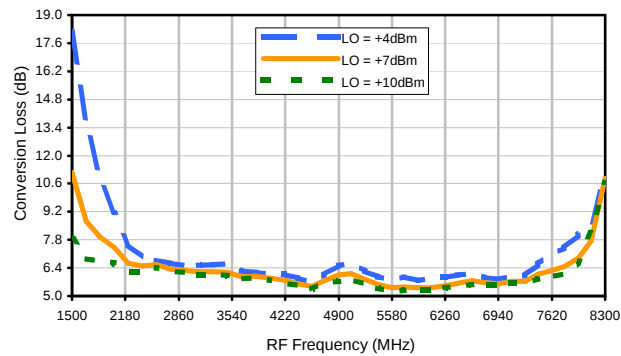


Conversion Loss vs. LO @ RF=5150MHz

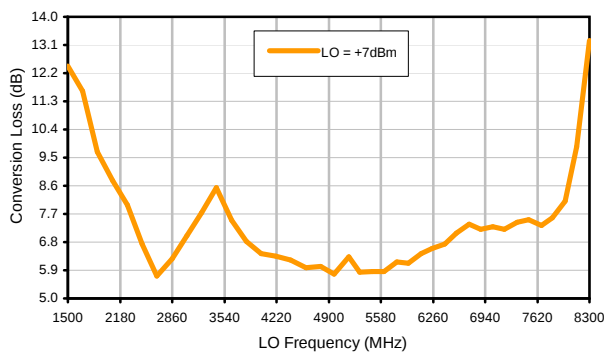


Conversion Loss vs. IF @ RF=5150MHz

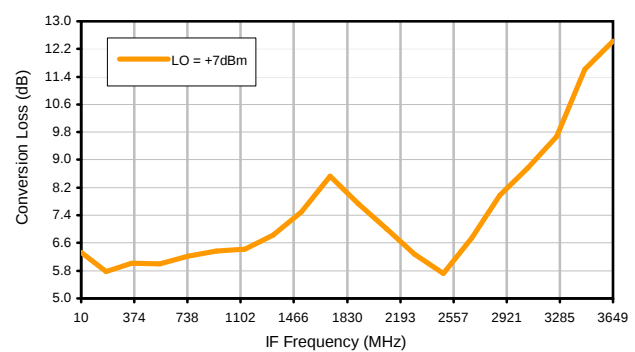


Conversion Loss vs. IF @ RF=2190MHz

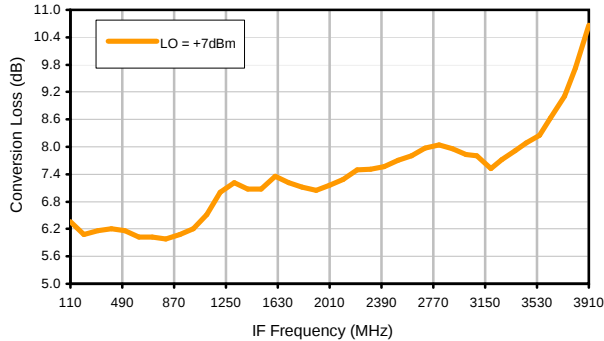


Conversion Loss vs. IF @ RF=8010.1MHz

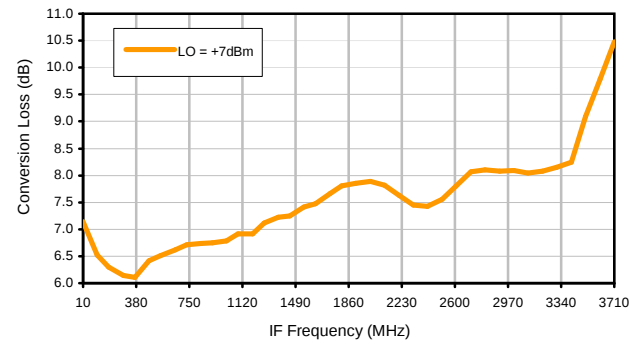

IP3 Input

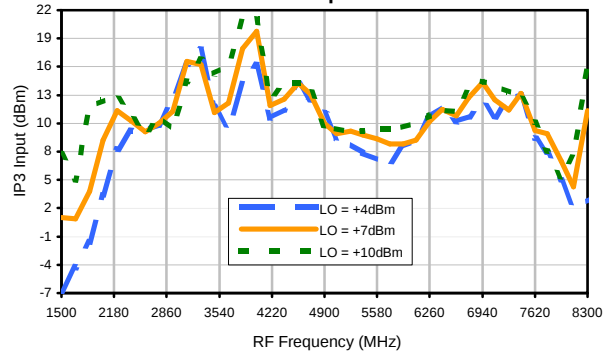


Compression @ RF IN=+1dBm

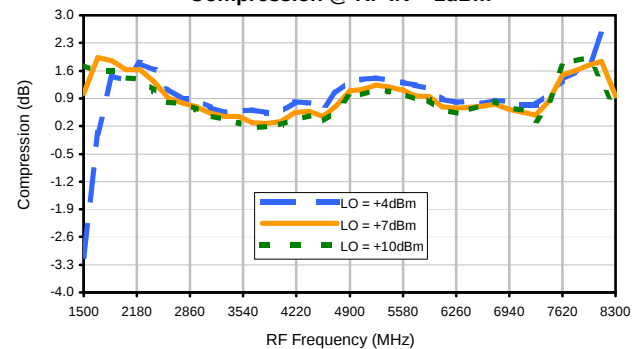


Typical Performance Curves


LO-RF Isolation

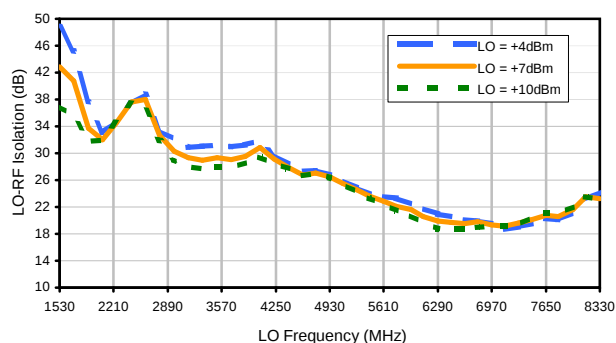


LO-IF Isolation

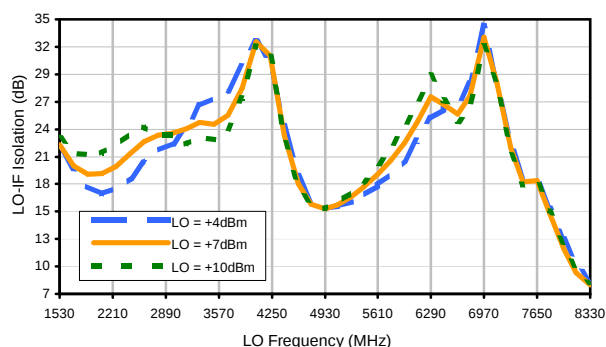


RF-IF Isolation

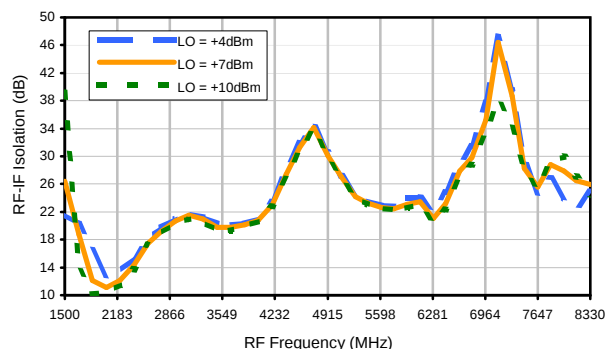


RF VSWR

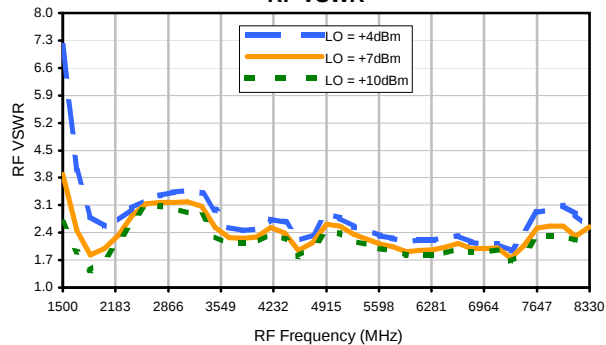

LO VSWR

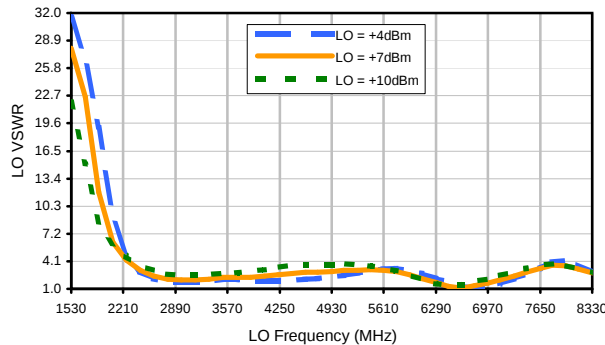

IF VSWR

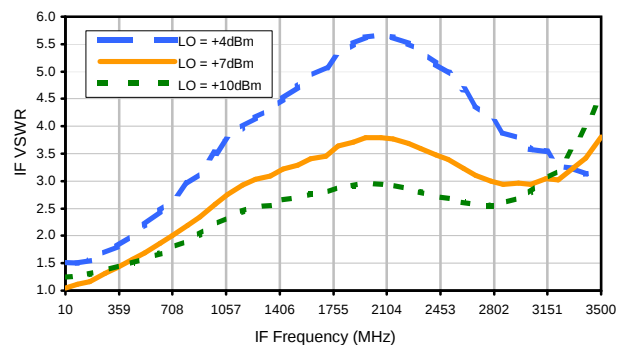

Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	+11	11	18	27	---	---	---	---	---	---
1	-	20	+0	35	20	33	45	---	---	---	---	---
2	>90	51	55	51	51	53	51	>70	---	---	---	---
3	>90	57	55	>70	57	>70	>70	64	>70	---	---	---
4	>90	>70	>70	>70	>70	>70	>70	>70	>70	>70	---	---
5	---	---	>70	>70	>70	>70	>70	>70	>70	>70	>70	---
6	---	---	---	>70	>70	>70	>70	>70	>70	>70	>70	>70
7	---	---	---	---	>70	>70	>70	>70	>70	>70	>70	>70
8	---	---	---	---	---	>70	>70	>70	>70	>70	>70	>70
9	---	---	---	---	---	---	>70	>70	>70	>70	>70	>70
10	---	---	---	---	---	---	---	>70	>70	>70	>70	>70
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 5150 MHz; -14.00 dBm.
LO IN: 5180 MHz; +7.00 dBm
IF OUT: 30 MHz; -20.15 dBm

RF HARMONICS ORDER


	(-dBm)	(-dBc)										
0	-	-	+1	20	28	39	---	---	---	---	---	---
1	-	19	+0	36	20	39	47	---	---	---	---	---
2	71	42	45	38	42	55	45	59	---	---	---	---
3	>90	36	34	60	35	60	53	49	59	---	---	---
4	>90	68	58	54	66	50	63	58	58	71	---	---
5	---	---	77	65	60	76	56	>80	68	63	76	---
6	---	---	---	>80	>80	70	>80	63	79	71	70	>80
7	---	---	---	---	>80	>80	78	>80	71	>80	78	76
8	---	---	---	---	---	>80	>80	>80	>80	74	>80	>80
9	---	---	---	---	---	---	>80	>80	>80	>80	>80	>80
10	---	---	---	---	---	---	---	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 5150 MHz; -4.00 dBm.
LO IN: 5180 MHz; +7.00 dBm
IF OUT: 30 MHz; -10.12 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

Outline Dimensions

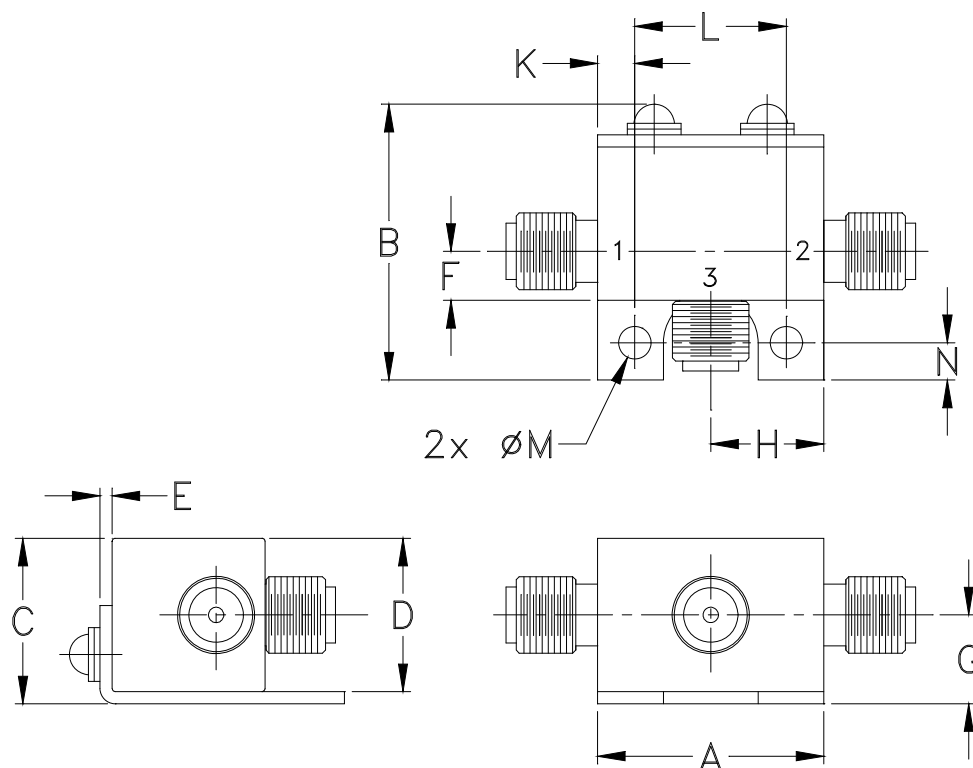

CASE #.	A	B	C	D	E	F	G	H	J	K	L	M	N	WT, GRAM
FL905	.74 (18.80)	.90 (22.86)	.54 (13.72)	.50 (12.70)	.04 (1.02)	.16 (4.06)	.29 (7.37)	.37 (9.40)	- -	.122 (3.10)	.496 (12.60)	.106 (2.69)	.122 (3.10)	20.0

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$.

Tolerance on hole size and interaxes dimensions to be $\pm .005$.

Notes:

1. Case material: Brass.
2. Case finish: Nickel plate.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I