

Product Features

- InGaP HBT microwave amplifier
- Miniature SOT-89 package
- Frequency range, DC to 8 GHz
- Internally Matched to 50 Ohms
- Output power, 12.9 dBm typ.
- Excellent package for heat dissipation, exposed metal bottom
- Low thermal resistance for high reliability
- Aqueous washable
- Protected by US Patent 6,943,629

Typical Applications

- Cellular
- PCS
- Communication receivers & transmitters



Generic photo used for illustration purposes only

Gali 2+

CASE STYLE: DF782



+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

General Description

Gali2+ (RoHS compliant) is a wideband amplifier offering high dynamic range. Lead finish is SnAgNi. It has repeatable performance from lot to lot, and is enclosed in a SOT-89 package. It uses patented Transient Protected Darlington configuration and is fabricated using InGaP HBT technology. Expected MTTF is 20,000 years at 85°C case temperature. Gali2+ is designed to be rugged for ESD and supply switch-on transients.

simplified schematic and pin description

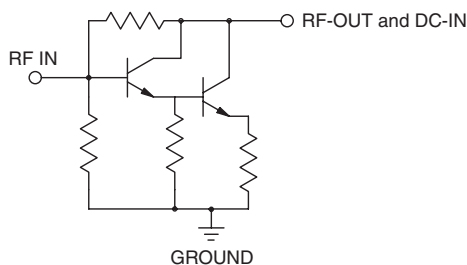

Function	Pin Number	Description
RF IN	1	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.
RF-OUT and DC-IN	3	RF output and bias pin. DC voltage is present on this pin; therefore a DC blocking capacitor is necessary for proper operation. An RF choke is needed to feed DC bias without loss of RF signal due to the bias connection, as shown in "Recommended Application Circuit".
GND	2,4	Connections to ground. Use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Electrical Specifications at 25°C and 40mA, unless noted

Parameter		Min.	Typ.	Max.	Units
Frequency Range*		DC		8	GHz
Gain	f=0.1 GHz	—	16.2	—	dB
	f=1 GHz	—	15.8	—	
	f=2 GHz	12	14.8	—	
	f=3 GHz	—	13.7	—	
	f=4 GHz	—	12.7	—	
	f=6 GHz	—	13.2	—	
	f=8 GHz	—	15.1	—	
Input Return Loss	f= DC to 3 GHz		12.5		dB
	f= 3 to 8 GHz		7.5		
Output Return Loss	f= DC to 3 GHz		12.5		dB
	f= 3 to 8 GHz		7.0		
Output Power @ 1 dB compression	f=2 GHz	11.0	12.9	—	dBm
Output IP3	f=2 GHz		27		dBm
Noise Figure	f=2 GHz		4.6		dB
Recommended Device Operating Current			40		mA
Device Operating Voltage		3.0	3.5	4.1	V
Device Voltage Variation vs. Temperature at 40 mA			-2.5		mV/°C
Device Voltage Variation vs. Current at 25°C			6.2		mV/mA
Thermal Resistance, junction-to-case ¹			101		°C/W

*Guaranteed specification DC-8 GHz. Low frequency cut off determined by external coupling capacitors.

Absolute Maximum Ratings

Parameter	Ratings
Operating Temperature*	-45°C to 85°C
Storage Temperature	-65°C to 150°C
Operating Current	55mA
Input Power	15dBm

Note: Permanent damage may occur if any of these limits are exceeded.

These ratings are not intended for continuous normal operation.

¹Case is defined as ground leads.


*Based on typical case temperature rise 2°C above ambient.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Product Marking



Markings in addition to model number designation may appear for internal quality control purposes.

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Performance data, graphs, s-parameter data set (.zip file)

Case Style: DF782

Plastic package, exposed paddle, lead finish: Matte-Tin

Tape & Reel: F55


7” reels with 20, 50, 100, 200, 500, 1K devices.

Suggested Layout for PCB Design: PL-019

Evaluation Board: TB-409-2+

Environmental Ratings: ENV08T2

Recommended Application Circuit

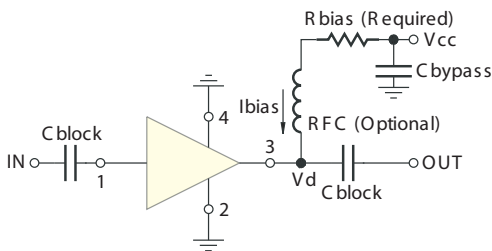

Test Board includes case, connectors, and components (in bold) soldered to PCB

R BIAS	
Vcc	“1%” Res. Values (ohms) for Optimum Biasing
7	88.7
8	113
9	137
10	162
11	187
12	215
13	237
14	261
15	287
16	316
17	340
18	365
19	392
20	412

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



ESD Rating

Human Body Model (HBM): Class 1A (250v to < 500v) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M1 (< 100v) in accordance with ANSI/ESD STM 5.2 - 1999

MSL Rating

Moisture Sensitivity: MSL1 in accordance with IPC/JEDECJ-STD-020C

No.	Test Required	Condition	Standard	Quantity
1	Visual Inspection	Low Power Microscope Magnification 40x	MIP-IN-0003 (MCT spec)	45 units
2	Electrical Test	Room Temperature	SCD (MCL spec)	45 units
3	SAM Analysis	Less than 10% growth in term of delamination	J-Std-020C (Jedec Standard)	45 units
4	Moisture Sensitivity Level 1	Bake at 125°C for 24 hours Soak at 85°C/85%RH for 168 hours Reflow 3 cycles at 260°C peak	J-Std-020C (Jedec Standard)	45 units

MSL Test Flow Chart**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Typical Performance Data

**NOTE: Use PDF Bookmarks to view DATA at required conditions
or to view GRAPHS.**

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 40mA, Vd = 3.41V @Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	16.53	20.00	45.59	26.22	1.08	0.67	29.34	13.87	3.06
100	16.51	19.94	48.75	25.66	1.08	0.67	29.33	13.81	3.20
200	16.45	19.91	49.46	25.39	1.08	0.67	29.59	13.89	3.01
400	16.35	19.92	42.71	25.46	1.08	0.66	29.06	13.83	3.14
600	16.23	19.99	39.99	25.05	1.09	0.65	28.54	13.71	3.13
800	16.10	20.01	40.02	25.10	1.10	0.64	29.03	13.60	3.20
1000	15.97	20.05	38.86	25.20	1.11	0.62	28.86	13.45	3.19
1200	15.83	20.09	36.28	25.76	1.12	0.61	28.42	13.19	3.21
1400	15.69	20.16	33.59	26.69	1.13	0.60	27.81	13.28	3.33
1600	15.53	20.24	31.11	28.22	1.15	0.58	28.18	13.13	3.32
1800	15.38	20.31	28.54	30.70	1.16	0.57	28.21	13.12	3.46
2000	15.23	20.39	25.96	35.78	1.18	0.55	27.93	13.25	3.15
2200	15.07	20.50	23.88	67.90	1.20	0.54	27.56	13.33	3.21
2400	14.89	20.63	22.21	36.25	1.22	0.52	27.18	13.26	3.40
2600	14.74	20.78	20.46	29.90	1.24	0.50	26.67	13.23	3.43
2800	14.59	20.91	19.20	26.29	1.27	0.49	26.52	12.96	3.40
3000	14.44	21.06	18.19	23.85	1.29	0.47	26.43	12.69	3.26
3200	14.31	21.25	17.10	21.68	1.32	0.46	26.06	12.61	3.35
3400	14.16	21.42	16.35	20.40	1.35	0.45	25.70	12.68	3.55
3600	14.03	21.57	15.65	19.24	1.37	0.44	25.03	12.59	3.61
3800	13.90	21.76	15.10	18.21	1.40	0.43	24.32	12.46	3.70
4000	13.79	21.95	14.56	17.44	1.43	0.42	23.93	12.51	3.57
4200	13.69	22.11	14.27	16.87	1.46	0.41	24.01	12.41	3.54
4400	13.60	22.25	14.15	16.58	1.49	0.40	23.94	12.07	3.58
4600	13.54	22.40	13.96	16.14	1.51	0.39	23.72	11.83	3.81
4800	13.49	22.56	14.02	16.01	1.54	0.38	23.17	11.56	3.97
5000	13.51	22.72	14.00	15.87	1.55	0.38	22.86	11.20	3.81
5200	13.51	22.80	14.23	15.82	1.57	0.37	22.73	10.78	3.69
5400	13.55	22.92	14.49	15.76	1.58	0.37	22.39	10.45	3.63
5600	13.63	23.01	14.66	15.66	1.58	0.36	21.99	10.07	3.74
5800	13.69	23.02	15.21	15.68	1.57	0.36	21.22	10.06	3.84
6000	13.77	23.03	15.67	15.81	1.57	0.36	20.48	9.67	3.88
6200	13.89	22.97	16.50	15.83	1.54	0.37	20.10	9.60	3.68
6400	14.02	22.94	17.15	15.76	1.53	0.37	19.65	9.35	3.68
6600	14.12	22.82	18.49	15.92	1.50	0.38	19.15	9.05	3.72
6800	14.27	22.55	20.12	15.52	1.45	0.39	18.52	8.70	3.86
7000	14.35	22.52	21.23	15.57	1.44	0.40	18.02	8.51	3.91
7200	14.41	22.25	23.35	15.24	1.40	0.41	17.77	8.15	3.85
7500	14.40	21.77	23.33	14.49	1.35	0.44	17.60	7.76	4.04
8000	13.89	21.13	16.97	13.43	1.32	0.46	17.02	6.20	3.96

REV. X1
GALI-2+
070821

Page 1 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 32mA, Vd = 3.36V @Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	16.30	19.60	32.54	31.87	1.07	0.68	25.82	11.69	3.03
100	16.27	19.67	34.62	30.43	1.08	0.68	25.82	11.57	3.14
200	16.22	19.76	34.59	30.24	1.08	0.66	25.99	11.76	3.01
400	16.11	19.77	35.17	30.22	1.09	0.66	25.64	11.64	3.13
600	16.00	19.77	33.51	29.71	1.09	0.65	25.36	11.67	3.12
800	15.85	19.77	32.52	29.29	1.10	0.64	25.93	11.52	3.18
1000	15.74	19.82	31.41	29.40	1.11	0.62	25.82	11.25	3.15
1200	15.59	19.89	30.21	29.78	1.12	0.61	25.37	10.89	3.19
1400	15.44	19.94	28.26	31.55	1.14	0.59	24.88	11.17	3.29
1600	15.30	20.05	26.88	34.49	1.15	0.58	25.23	10.90	3.29
1800	15.16	20.11	24.87	41.74	1.16	0.56	25.53	10.87	3.40
2000	15.03	20.21	23.25	48.93	1.18	0.55	25.31	11.01	3.11
2200	14.84	20.33	21.69	34.50	1.20	0.53	25.07	11.17	3.19
2400	14.68	20.45	20.17	29.09	1.22	0.52	24.97	11.22	3.37
2600	14.54	20.61	18.87	25.97	1.24	0.50	24.81	11.11	3.36
2800	14.38	20.74	17.87	23.62	1.27	0.49	24.87	10.70	3.34
3000	14.24	20.88	16.82	21.71	1.29	0.48	24.96	10.37	3.19
3200	14.08	21.07	15.94	20.11	1.32	0.46	24.79	10.46	3.28
3400	13.95	21.21	15.20	19.02	1.34	0.45	24.56	10.75	3.50
3600	13.83	21.38	14.71	18.14	1.37	0.44	23.89	10.66	3.54
3800	13.68	21.59	14.16	17.23	1.40	0.43	23.29	10.53	3.63
4000	13.60	21.76	13.74	16.55	1.42	0.42	22.98	10.83	3.51
4200	13.48	21.94	13.50	16.07	1.46	0.41	23.06	10.92	3.49
4400	13.40	22.05	13.33	15.77	1.48	0.40	22.95	10.64	3.51
4600	13.34	22.23	13.27	15.46	1.50	0.40	22.65	10.38	3.77
4800	13.30	22.35	13.23	15.31	1.52	0.39	22.20	10.06	3.91
5000	13.31	22.52	13.30	15.27	1.54	0.38	22.06	9.82	3.75
5200	13.30	22.58	13.44	15.21	1.55	0.38	22.06	9.43	3.66
5400	13.36	22.70	13.70	15.17	1.56	0.37	21.81	9.20	3.58
5600	13.43	22.82	13.93	15.12	1.57	0.37	21.49	8.88	3.69
5800	13.49	22.76	14.37	15.13	1.56	0.37	20.76	8.99	3.78
6000	13.59	22.78	14.85	15.25	1.55	0.37	20.09	8.65	3.80
6200	13.69	22.74	15.52	15.25	1.53	0.37	19.76	8.56	3.60
6400	13.83	22.71	16.15	15.20	1.51	0.38	19.29	8.39	3.61
6600	13.90	22.60	17.20	15.38	1.50	0.38	18.73	8.13	3.66
6800	14.06	22.33	18.55	15.03	1.44	0.40	18.11	7.82	3.78
7000	14.10	22.31	19.37	15.12	1.44	0.40	17.60	7.69	3.83
7200	14.15	22.03	20.52	14.83	1.40	0.42	17.37	7.26	3.76
7500	14.13	21.59	20.67	14.21	1.35	0.44	17.20	6.99	3.97
8000	13.56	20.93	16.09	13.33	1.33	0.46	16.71	5.49	3.85

REV. X1

GALI-2+

070821

Page 2 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 48mA, Vd = 3.46V @Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	16.68	20.08	37.49	23.75	1.08	0.68	31.95	15.26	3.10
100	16.65	20.08	35.77	23.63	1.08	0.68	32.01	15.20	3.24
200	16.60	20.05	36.32	23.51	1.08	0.67	32.20	15.21	3.05
400	16.49	20.07	35.53	23.50	1.08	0.66	31.47	15.11	3.17
600	16.37	20.12	34.99	23.13	1.09	0.65	30.67	14.96	3.16
800	16.25	20.14	36.26	23.14	1.10	0.64	30.83	14.77	3.22
1000	16.10	20.16	37.05	23.40	1.11	0.63	30.45	14.64	3.22
1200	15.96	20.23	37.78	23.82	1.12	0.61	29.98	14.43	3.25
1400	15.82	20.26	36.73	24.53	1.13	0.60	29.36	14.39	3.38
1600	15.66	20.36	34.59	25.78	1.15	0.58	29.58	14.34	3.36
1800	15.51	20.43	31.39	27.65	1.16	0.57	29.17	14.34	3.51
2000	15.36	20.52	28.18	31.27	1.18	0.55	28.92	14.42	3.21
2200	15.20	20.64	25.69	38.50	1.20	0.53	28.37	14.44	3.26
2400	15.03	20.76	23.70	47.17	1.22	0.52	27.79	14.27	3.48
2600	14.87	20.88	21.68	33.17	1.24	0.50	27.13	14.27	3.48
2800	14.72	21.03	20.26	28.47	1.27	0.49	26.79	14.09	3.45
3000	14.58	21.17	19.14	25.39	1.29	0.47	26.55	13.81	3.32
3200	14.42	21.37	17.94	22.89	1.32	0.46	26.13	13.57	3.42
3400	14.28	21.52	17.10	21.35	1.35	0.45	25.74	13.61	3.61
3600	14.14	21.69	16.36	20.04	1.38	0.43	25.09	13.48	3.66
3800	14.02	21.86	15.74	18.93	1.41	0.42	24.46	13.33	3.74
4000	13.91	22.06	15.17	18.00	1.44	0.41	24.07	13.28	3.62
4200	13.81	22.21	14.87	17.41	1.46	0.40	24.13	13.06	3.59
4400	13.72	22.36	14.73	17.09	1.49	0.39	24.09	12.77	3.63
4600	13.66	22.55	14.52	16.59	1.52	0.39	23.80	12.55	3.86
4800	13.61	22.67	14.57	16.44	1.54	0.38	23.27	12.32	4.01
5000	13.62	22.84	14.55	16.28	1.56	0.37	22.85	11.95	3.86
5200	13.62	22.93	14.79	16.26	1.57	0.37	22.70	11.52	3.76
5400	13.66	23.05	15.05	16.12	1.59	0.36	22.34	11.19	3.70
5600	13.74	23.17	15.22	16.02	1.59	0.36	21.92	10.79	3.80
5800	13.81	23.16	15.81	16.08	1.58	0.36	21.18	10.69	3.89
6000	13.89	23.16	16.30	16.16	1.57	0.36	20.45	10.35	3.93
6200	14.01	23.11	17.18	16.20	1.55	0.36	20.06	10.25	3.74
6400	14.14	23.08	17.89	16.10	1.53	0.37	19.66	10.02	3.76
6600	14.25	22.97	19.43	16.31	1.51	0.37	19.18	9.67	3.81
6800	14.41	22.70	21.35	15.83	1.45	0.39	18.60	9.30	3.94
7000	14.49	22.67	22.98	15.91	1.44	0.40	18.05	9.08	4.01
7200	14.58	22.42	26.07	15.55	1.40	0.41	17.82	8.69	3.92
7500	14.58	21.90	25.80	14.73	1.34	0.44	17.66	8.29	4.13
8000	14.11	21.23	17.52	13.53	1.31	0.47	16.96	6.72	4.05

REV. X1

GALI-2+

070821

Page 3 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 40mA, Vd = 3.59V @Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	16.72	20.13	48.18	25.44	1.08	0.68	30.00	14.10	2.48
100	16.69	19.99	60.69	25.99	1.07	0.68	29.94	14.01	2.60
200	16.64	20.02	47.50	26.47	1.07	0.68	30.19	14.11	2.45
400	16.53	20.05	35.92	23.74	1.08	0.67	29.83	14.10	2.57
600	16.44	20.05	36.02	23.58	1.08	0.66	29.42	14.02	2.52
800	16.31	20.08	37.18	23.56	1.09	0.65	29.91	13.89	2.59
1000	16.19	20.10	38.59	24.15	1.10	0.64	29.77	13.70	2.53
1200	16.05	20.15	37.94	24.18	1.11	0.62	29.34	13.46	2.59
1400	15.92	20.19	37.88	24.85	1.12	0.61	28.83	13.59	2.66
1600	15.78	20.26	33.74	26.22	1.13	0.60	29.22	13.44	2.65
1800	15.64	20.34	31.50	27.77	1.15	0.58	29.33	13.37	2.79
2000	15.49	20.40	28.44	29.70	1.16	0.57	29.10	13.55	2.50
2200	15.33	20.51	26.54	33.20	1.18	0.55	28.76	13.64	2.53
2400	15.18	20.64	24.68	42.37	1.20	0.53	28.43	13.66	2.71
2600	15.03	20.76	22.08	34.73	1.22	0.52	28.00	13.62	2.71
2800	14.88	20.90	20.50	28.54	1.24	0.50	27.90	13.32	2.67
3000	14.74	21.04	18.97	24.39	1.26	0.49	27.89	13.08	2.55
3200	14.59	21.23	18.03	22.15	1.29	0.48	27.58	13.07	2.65
3400	14.47	21.35	17.46	21.17	1.31	0.46	27.35	13.13	2.80
3600	14.33	21.47	16.66	19.88	1.34	0.45	26.62	12.99	2.78
3800	14.21	21.69	16.19	18.99	1.37	0.44	25.89	12.90	2.91
4000	14.11	21.84	15.61	18.07	1.39	0.43	25.44	13.03	2.80
4200	14.01	21.98	15.60	17.65	1.42	0.42	25.55	13.08	2.78
4400	13.94	22.12	15.49	17.35	1.44	0.41	25.65	12.87	2.81
4600	13.88	22.30	15.40	16.79	1.47	0.40	25.48	12.64	3.00
4800	13.83	22.41	15.33	16.49	1.48	0.40	25.06	12.46	3.13
5000	13.85	22.56	15.46	16.34	1.50	0.39	24.75	12.23	3.01
5200	13.84	22.67	15.36	16.16	1.51	0.38	24.69	11.77	2.95
5400	13.88	22.81	15.32	15.84	1.52	0.38	24.43	11.51	2.89
5600	13.96	22.92	15.72	15.50	1.52	0.38	24.14	11.09	2.95
5800	14.03	22.91	16.15	15.20	1.51	0.38	23.48	11.04	3.04
6000	14.10	22.93	16.17	14.94	1.50	0.38	22.75	10.60	3.07
6200	14.23	22.89	17.53	14.88	1.49	0.38	22.44	10.62	2.90
6400	14.38	22.85	18.45	14.61	1.46	0.39	21.99	10.52	2.95
6600	14.52	22.74	20.23	14.86	1.44	0.40	21.39	10.21	2.97
6800	14.70	22.51	22.04	14.59	1.39	0.41	20.74	9.81	3.03
7000	14.82	22.46	25.65	14.90	1.37	0.42	20.22	9.56	3.06
7200	14.96	22.20	30.01	14.71	1.33	0.44	19.94	9.20	3.02
7500	15.07	21.70	25.65	14.04	1.27	0.48	19.80	9.06	3.24
8000	14.77	21.03	17.42	13.37	1.23	0.51	19.87	7.55	3.14

REV. X1

GALI-2+

070821

Page 4 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 32mA, Vd = 3.54V @Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	16.51	19.89	36.57	28.68	1.08	0.68	26.31	11.69	2.44
100	16.47	19.86	34.62	29.71	1.08	0.68	26.26	11.50	2.53
200	16.44	19.89	33.15	31.04	1.08	0.67	26.44	11.68	2.43
400	16.35	19.88	40.04	26.82	1.08	0.67	26.29	11.65	2.55
600	16.25	19.89	39.03	26.33	1.09	0.66	26.01	11.58	2.51
800	16.12	19.90	36.72	26.37	1.09	0.65	26.58	11.53	2.58
1000	15.99	19.95	34.06	27.16	1.10	0.63	26.48	11.25	2.54
1200	15.85	19.99	33.39	27.16	1.11	0.62	26.08	10.94	2.56
1400	15.73	20.03	32.28	27.96	1.12	0.61	25.64	11.18	2.66
1600	15.59	20.09	29.70	29.91	1.13	0.60	25.94	10.96	2.63
1800	15.46	20.16	27.82	32.13	1.15	0.58	26.25	10.89	2.76
2000	15.31	20.24	25.54	35.27	1.16	0.57	26.08	11.06	2.44
2200	15.16	20.36	24.11	41.48	1.18	0.55	25.86	11.20	2.50
2400	15.01	20.48	22.56	38.06	1.20	0.53	25.81	11.33	2.68
2600	14.85	20.61	20.37	29.50	1.22	0.52	25.68	11.26	2.67
2800	14.71	20.75	19.15	25.62	1.24	0.50	25.80	10.87	2.63
3000	14.57	20.86	17.74	22.58	1.26	0.49	25.96	10.65	2.49
3200	14.42	21.05	16.96	20.81	1.29	0.48	25.92	10.71	2.62
3400	14.29	21.18	16.40	19.98	1.31	0.47	25.76	10.85	2.76
3600	14.16	21.33	15.66	18.86	1.33	0.46	25.06	10.82	2.75
3800	14.04	21.53	15.29	18.11	1.36	0.44	24.41	10.78	2.87
4000	13.94	21.70	14.77	17.27	1.39	0.43	24.09	10.92	2.76
4200	13.85	21.85	14.82	16.90	1.41	0.42	24.24	11.13	2.76
4400	13.78	21.94	14.71	16.66	1.43	0.42	24.26	11.01	2.79
4600	13.73	22.12	14.64	16.13	1.46	0.41	24.01	10.82	2.98
4800	13.68	22.23	14.59	15.91	1.47	0.40	23.64	10.65	3.11
5000	13.69	22.40	14.68	15.76	1.49	0.39	23.56	10.67	2.99
5200	13.69	22.49	14.59	15.62	1.50	0.39	23.67	10.26	2.92
5400	13.73	22.64	14.56	15.30	1.51	0.39	23.54	10.14	2.85
5600	13.81	22.73	14.97	14.98	1.51	0.38	23.33	9.77	2.94
5800	13.88	22.73	15.35	14.73	1.50	0.39	22.73	9.93	2.98
6000	13.95	22.74	15.38	14.48	1.49	0.39	22.07	9.56	3.04
6200	14.09	22.69	16.66	14.46	1.47	0.39	21.84	9.50	2.84
6400	14.23	22.65	17.42	14.23	1.45	0.39	21.45	9.52	2.88
6600	14.36	22.55	18.91	14.49	1.43	0.40	20.80	9.33	2.90
6800	14.53	22.33	20.36	14.23	1.38	0.42	20.15	9.00	2.99
7000	14.66	22.27	22.95	14.54	1.37	0.42	19.62	8.77	3.00
7200	14.78	22.00	25.01	14.39	1.33	0.44	19.37	8.44	2.94
7500	14.85	21.53	23.34	13.80	1.27	0.48	19.22	8.28	3.19
8000	14.50	20.88	16.71	13.24	1.24	0.51	19.04	6.93	3.07

REV. X1

GALI-2+

070821

Page 5 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 48mA, Vd = 3.64V @Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	16.84	20.23	36.76	23.76	1.07	0.68	32.63	15.47	2.51
100	16.82	20.16	39.39	24.16	1.07	0.68	32.65	15.45	2.64
200	16.77	20.22	43.34	24.62	1.08	0.67	32.84	15.52	2.47
400	16.66	20.14	31.80	22.20	1.08	0.67	32.32	15.47	2.58
600	16.56	20.19	32.05	22.21	1.09	0.66	31.63	15.34	2.54
800	16.43	20.20	33.26	22.18	1.09	0.65	31.94	15.17	2.63
1000	16.31	20.21	35.36	22.85	1.10	0.64	31.63	15.04	2.58
1200	16.17	20.27	35.26	22.78	1.11	0.62	31.22	14.83	2.61
1400	16.04	20.29	37.23	23.38	1.12	0.61	30.74	14.83	2.70
1600	15.89	20.38	35.57	24.44	1.13	0.60	30.99	14.79	2.68
1800	15.75	20.44	34.08	25.80	1.15	0.58	30.73	14.78	2.84
2000	15.61	20.51	30.52	27.47	1.16	0.57	30.51	14.89	2.52
2200	15.45	20.64	28.60	29.93	1.18	0.55	30.08	14.91	2.57
2400	15.29	20.75	26.35	36.15	1.20	0.53	29.57	14.82	2.72
2600	15.14	20.88	23.41	40.55	1.22	0.52	28.90	14.82	2.73
2800	14.99	21.00	21.62	31.06	1.24	0.50	28.63	14.69	2.68
3000	14.85	21.15	19.90	25.77	1.27	0.49	28.39	14.51	2.57
3200	14.70	21.32	18.89	23.21	1.29	0.47	28.09	14.29	2.72
3400	14.57	21.44	18.26	22.01	1.32	0.46	27.82	14.32	2.83
3600	14.43	21.61	17.37	20.60	1.34	0.45	27.15	14.24	2.83
3800	14.31	21.78	16.86	19.62	1.37	0.44	26.45	14.13	2.93
4000	14.21	21.95	16.24	18.64	1.40	0.43	25.96	14.11	2.86
4200	14.11	22.09	16.25	18.19	1.42	0.42	26.04	13.96	2.84
4400	14.03	22.21	16.11	17.82	1.44	0.41	26.17	13.72	2.83
4600	13.97	22.37	16.01	17.24	1.47	0.40	26.05	13.52	3.04
4800	13.92	22.51	15.93	16.87	1.49	0.39	25.58	13.34	3.16
5000	13.94	22.70	16.06	16.73	1.51	0.39	25.16	13.06	3.05
5200	13.93	22.78	15.94	16.53	1.52	0.38	25.07	12.58	2.99
5400	13.97	22.92	15.85	16.18	1.53	0.38	24.77	12.32	2.93
5600	14.05	23.04	16.27	15.85	1.53	0.37	24.43	11.93	3.01
5800	14.11	23.02	16.77	15.53	1.52	0.37	23.80	11.75	3.05
6000	14.18	23.07	16.73	15.24	1.51	0.37	23.03	11.35	3.10
6200	14.32	23.01	18.19	15.20	1.49	0.38	22.70	11.33	2.94
6400	14.48	22.99	19.21	14.91	1.47	0.38	22.25	11.26	3.00
6600	14.61	22.88	21.27	15.17	1.44	0.39	21.71	10.91	3.00
6800	14.80	22.62	23.15	14.87	1.39	0.41	21.13	10.48	3.11
7000	14.93	22.59	27.75	15.20	1.38	0.41	20.57	10.14	3.11
7200	15.07	22.32	37.44	14.99	1.33	0.44	20.27	9.79	3.08
7500	15.21	21.84	26.35	14.27	1.27	0.47	20.11	9.74	3.29
8000	14.97	21.13	17.72	13.53	1.22	0.51	19.94	8.10	3.22

REV. X1

GALI-2+

070821

Page 6 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 40mA, Vd = 3.27V @Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	16.37	19.70	42.03	27.37	1.07	0.68	29.05	13.64	3.54
100	16.34	19.80	47.40	26.07	1.08	0.67	29.08	13.64	3.63
200	16.28	19.83	40.66	24.68	1.08	0.66	29.40	13.66	3.47
400	16.18	19.85	41.76	26.40	1.09	0.65	28.72	13.59	3.62
600	16.05	19.87	39.05	26.50	1.10	0.64	28.11	13.46	3.60
800	15.92	19.90	35.64	27.19	1.10	0.63	28.42	13.28	3.69
1000	15.78	19.94	33.72	27.99	1.11	0.62	28.16	13.12	3.67
1200	15.63	19.98	31.45	29.00	1.13	0.61	27.66	12.91	3.74
1400	15.49	20.08	29.48	30.06	1.14	0.59	27.08	12.92	3.85
1600	15.33	20.16	27.66	32.33	1.16	0.57	27.47	12.80	3.85
1800	15.17	20.24	25.73	36.40	1.17	0.56	27.27	12.78	4.01
2000	15.02	20.34	23.64	47.12	1.19	0.54	26.94	12.94	3.70
2200	14.85	20.47	21.90	37.65	1.21	0.52	26.49	12.93	3.80
2400	14.69	20.59	20.41	30.63	1.23	0.51	25.96	12.81	4.00
2600	14.52	20.74	19.00	26.95	1.26	0.49	25.35	12.74	4.05
2800	14.37	20.88	17.94	24.63	1.28	0.48	25.06	12.42	4.00
3000	14.22	21.03	17.03	22.53	1.31	0.47	24.86	12.07	3.86
3200	14.06	21.25	15.97	20.68	1.34	0.45	24.48	12.03	3.95
3400	13.91	21.39	15.18	19.34	1.36	0.44	24.15	12.07	4.18
3600	13.76	21.56	14.47	18.24	1.39	0.43	23.42	11.88	4.24
3800	13.64	21.78	13.91	17.31	1.42	0.42	22.76	11.72	4.32
4000	13.52	21.99	13.43	16.47	1.46	0.41	22.41	11.71	4.19
4200	13.42	22.16	13.18	16.02	1.49	0.40	22.52	11.50	4.14
4400	13.32	22.31	13.07	15.70	1.52	0.39	22.27	11.15	4.20
4600	13.26	22.49	12.95	15.41	1.55	0.38	21.94	10.85	4.48
4800	13.20	22.58	13.03	15.42	1.57	0.38	21.32	10.45	4.59
5000	13.22	22.78	12.99	15.43	1.59	0.37	20.94	10.03	4.46
5200	13.23	22.87	13.24	15.54	1.60	0.36	20.73	9.57	4.37
5400	13.25	22.99	13.38	15.56	1.62	0.36	20.34	9.26	4.31
5600	13.33	23.05	13.52	15.74	1.62	0.36	19.95	8.90	4.43
5800	13.39	23.05	14.07	15.96	1.61	0.35	19.16	8.93	4.56
6000	13.44	23.04	14.35	16.14	1.61	0.36	18.53	8.50	4.65
6200	13.54	23.01	14.90	16.33	1.59	0.36	18.15	8.34	4.46
6400	13.64	22.91	15.44	16.36	1.57	0.36	17.68	8.02	4.41
6600	13.71	22.86	16.57	16.72	1.56	0.36	17.19	7.76	4.42
6800	13.81	22.52	17.83	16.12	1.50	0.38	16.44	7.36	4.68
7000	13.83	22.52	18.34	16.07	1.50	0.38	16.13	7.23	4.85
7200	13.83	22.22	19.75	15.56	1.47	0.39	15.86	6.64	4.82
7500	13.65	21.76	20.56	14.64	1.43	0.41	15.62	6.48	4.95
8000	12.88	21.10	15.99	13.27	1.42	0.42	14.81	4.80	5.15

REV. X1

GALI-2+

070821

Page 7 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 32mA, Vd = 3.22V @Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	16.11	19.50	30.07	34.93	1.08	0.68	25.57	11.68	3.57
100	16.08	19.60	33.74	32.08	1.08	0.67	25.59	11.63	3.61
200	16.01	19.60	36.25	29.23	1.09	0.66	25.88	11.76	3.50
400	15.90	19.65	31.85	32.07	1.09	0.65	25.40	11.73	3.66
600	15.80	19.66	30.37	32.72	1.10	0.64	25.02	11.65	3.62
800	15.65	19.66	28.87	34.33	1.11	0.63	25.52	11.43	3.71
1000	15.52	19.72	27.55	36.20	1.12	0.62	25.40	11.22	3.67
1200	15.37	19.78	26.50	37.55	1.13	0.60	24.95	10.88	3.72
1400	15.23	19.84	25.46	41.48	1.14	0.59	24.42	11.11	3.86
1600	15.08	19.95	24.11	47.57	1.16	0.57	24.78	10.89	3.85
1800	14.93	20.01	22.62	42.28	1.17	0.56	25.09	10.87	3.97
2000	14.77	20.12	21.14	34.49	1.19	0.54	24.87	11.06	3.68
2200	14.60	20.28	19.88	29.83	1.21	0.52	24.59	11.18	3.74
2400	14.44	20.40	18.61	26.13	1.23	0.51	24.41	11.09	4.00
2600	14.28	20.53	17.44	23.92	1.26	0.49	24.11	10.97	4.02
2800	14.12	20.69	16.63	22.30	1.28	0.48	24.08	10.48	3.94
3000	13.99	20.82	15.74	20.61	1.30	0.47	24.05	10.13	3.81
3200	13.83	21.05	14.93	19.19	1.33	0.45	23.80	10.33	3.91
3400	13.69	21.20	14.17	18.05	1.36	0.44	23.55	10.43	4.15
3600	13.53	21.40	13.59	17.18	1.39	0.43	22.85	10.38	4.17
3800	13.40	21.59	13.12	16.31	1.42	0.42	22.23	10.37	4.27
4000	13.29	21.76	12.64	15.64	1.45	0.42	21.96	10.48	4.13
4200	13.18	21.98	12.46	15.28	1.48	0.40	22.06	10.42	4.11
4400	13.10	22.10	12.31	14.96	1.50	0.40	21.85	10.07	4.16
4600	13.01	22.28	12.28	14.75	1.54	0.39	21.50	9.73	4.38
4800	12.98	22.37	12.30	14.74	1.55	0.38	20.96	9.36	4.57
5000	12.98	22.54	12.34	14.79	1.58	0.38	20.67	8.99	4.41
5200	12.99	22.64	12.56	14.87	1.59	0.37	20.54	8.58	4.33
5400	13.03	22.75	12.67	14.92	1.60	0.37	20.17	8.28	4.28
5600	13.09	22.86	12.86	15.12	1.61	0.36	19.80	7.94	4.39
5800	13.15	22.80	13.35	15.32	1.60	0.36	19.03	8.10	4.51
6000	13.21	22.80	13.56	15.52	1.60	0.36	18.38	7.71	4.61
6200	13.30	22.74	14.07	15.70	1.58	0.36	18.02	7.55	4.39
6400	13.40	22.71	14.54	15.77	1.57	0.37	17.49	7.28	4.34
6600	13.46	22.60	15.56	16.05	1.55	0.37	16.99	6.99	4.37
6800	13.54	22.28	16.55	15.56	1.50	0.38	16.22	6.68	4.60
7000	13.53	22.24	17.00	15.55	1.50	0.39	15.93	6.52	4.78
7200	13.52	21.96	18.03	15.11	1.47	0.40	15.65	5.91	4.69
7500	13.34	21.56	18.55	14.35	1.44	0.41	15.42	5.88	4.88
8000	12.53	20.91	15.23	13.21	1.44	0.42	14.72	4.18	5.05

REV. X1

GALI-2+

070821

Page 8 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 48mA, Vd = 3.32V @Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	16.54	19.91	40.22	24.50	1.07	0.68	31.68	14.81	3.49
100	16.51	19.90	35.11	23.69	1.07	0.68	31.79	14.89	3.63
200	16.45	19.97	32.58	22.55	1.08	0.67	32.04	14.81	3.43
400	16.34	19.97	37.33	24.05	1.09	0.66	30.97	14.75	3.60
600	16.21	20.04	37.92	24.08	1.10	0.64	29.99	14.52	3.58
800	16.07	20.03	41.75	24.85	1.10	0.63	29.92	14.28	3.66
1000	15.94	20.08	40.27	25.28	1.11	0.62	29.45	14.16	3.66
1200	15.79	20.14	37.15	26.07	1.13	0.61	28.89	13.86	3.73
1400	15.63	20.19	33.36	27.09	1.14	0.59	28.31	13.85	3.86
1600	15.48	20.28	30.77	28.57	1.15	0.57	28.52	13.76	3.86
1800	15.33	20.37	27.92	31.01	1.17	0.56	27.80	13.80	4.02
2000	15.18	20.46	25.58	36.16	1.19	0.54	27.49	13.88	3.69
2200	15.00	20.59	23.38	51.10	1.21	0.52	26.91	13.84	3.78
2400	14.83	20.72	21.58	35.24	1.23	0.51	26.25	13.57	4.01
2600	14.68	20.87	20.07	29.80	1.26	0.49	25.51	13.53	4.06
2800	14.51	20.99	18.86	26.46	1.28	0.48	25.14	13.27	4.00
3000	14.36	21.14	17.76	23.93	1.31	0.47	24.82	12.93	3.87
3200	14.20	21.37	16.64	21.71	1.34	0.45	24.39	12.68	3.97
3400	14.05	21.52	15.77	20.25	1.37	0.44	24.03	12.73	4.18
3600	13.91	21.69	15.08	19.02	1.39	0.43	23.36	12.56	4.22
3800	13.77	21.91	14.43	17.90	1.43	0.42	22.70	12.41	4.33
4000	13.66	22.11	13.94	17.02	1.46	0.41	22.39	12.27	4.20
4200	13.55	22.26	13.64	16.47	1.49	0.40	22.45	12.01	4.15
4400	13.46	22.42	13.48	16.14	1.52	0.39	22.18	11.66	4.20
4600	13.39	22.60	13.41	15.79	1.55	0.38	21.84	11.40	4.43
4800	13.33	22.72	13.44	15.75	1.57	0.37	21.20	10.99	4.59
5000	13.35	22.90	13.46	15.77	1.60	0.37	20.82	10.56	4.47
5200	13.34	23.00	13.68	15.84	1.61	0.36	20.60	10.15	4.41
5400	13.38	23.11	13.86	15.88	1.62	0.35	20.20	9.82	4.34
5600	13.45	23.21	14.03	16.04	1.63	0.35	19.84	9.40	4.47
5800	13.50	23.19	14.54	16.23	1.62	0.35	19.05	9.42	4.58
6000	13.57	23.20	14.89	16.44	1.62	0.35	18.40	9.08	4.69
6200	13.66	23.17	15.41	16.60	1.60	0.35	18.05	8.85	4.52
6400	13.78	23.10	16.03	16.66	1.58	0.36	17.59	8.50	4.48
6600	13.83	23.00	17.27	16.96	1.57	0.36	17.16	8.19	4.51
6800	13.95	22.69	18.73	16.34	1.51	0.38	16.40	7.81	4.76
7000	13.96	22.63	19.43	16.27	1.50	0.38	16.07	7.64	4.99
7200	13.97	22.35	21.03	15.73	1.47	0.39	15.81	7.05	5.02
7500	13.83	21.91	22.03	14.75	1.43	0.41	15.60	6.87	5.04
8000	13.06	21.23	16.44	13.28	1.42	0.42	14.72	5.11	5.18

REV. X1

GALI-2+

070821

Page 9 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Curves


GAIN vs. TEMPERATURE

INPUT POWER = -20dBm, CURRENT = 40mA

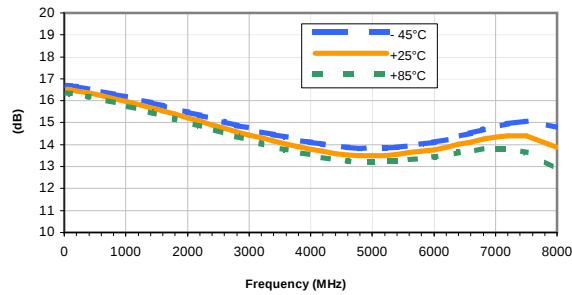


GAIN vs. CURRENT

INPUT POWER = -20dBm, Temperature = +25°C

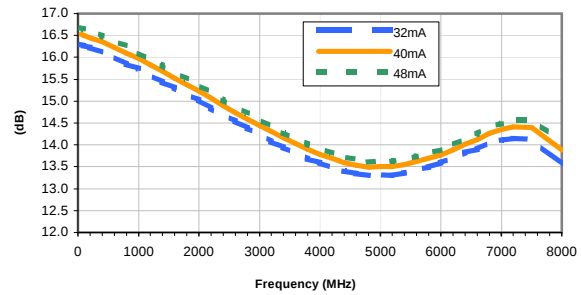


ISOLATION vs. TEMPERATURE

INPUT POWER = -20dBm, CURRENT = 40mA

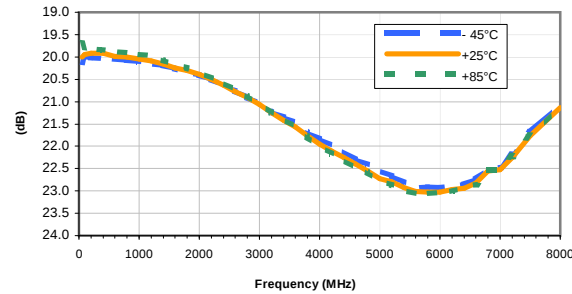


ISOLATION vs. CURRENT

INPUT POWER = -20dBm, Temperature = +25°C

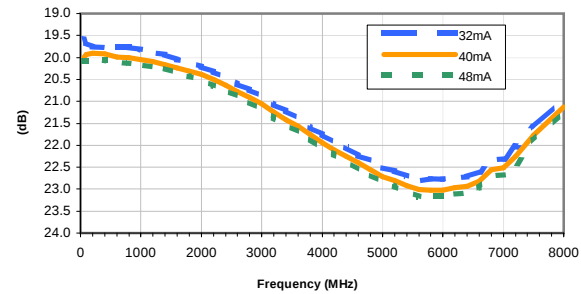


INPUT RETURN LOSS vs. TEMPERATURE

INPUT POWER = -20dBm, CURRENT = 40mA

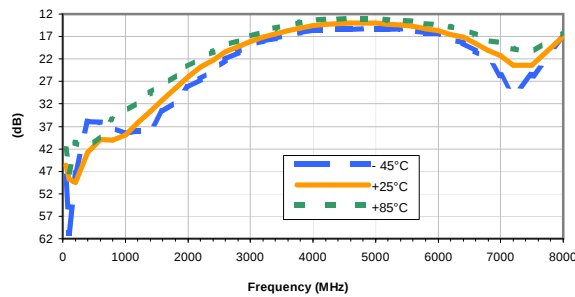


INPUT RETURN LOSS vs. CURRENT

INPUT POWER = -20dBm, Temperature = +25°C

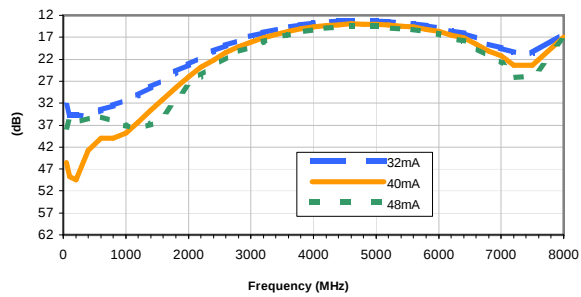


OUTPUT RETURN LOSS vs. TEMPERATURE

INPUT POWER = -20dBm, CURRENT = 40mA

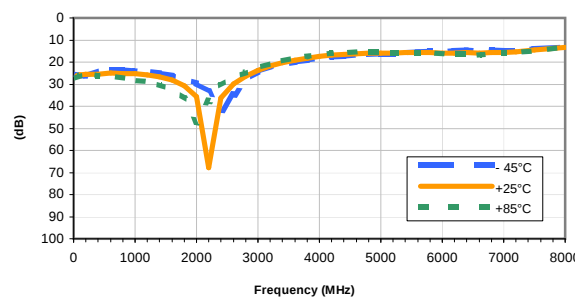

OUTPUT RETURN LOSS vs. CURRENT


INPUT POWER = -20dBm, Temperature = +25°C

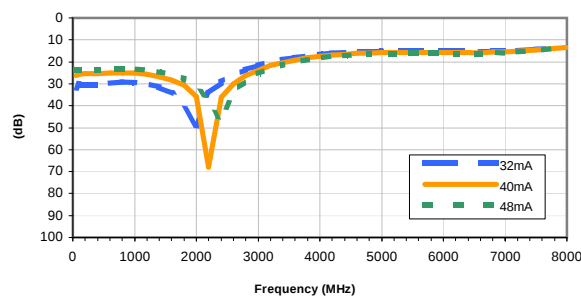

Typical Performance Curves


OUTPUT IP3 vs. TEMPERATURE

INPUT POWER = -20dBm, CURRENT = 40mA

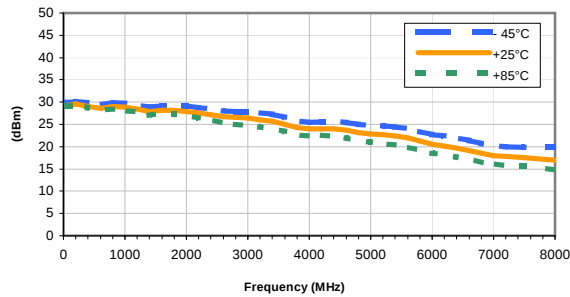


OUTPUT IP3 vs. CURRENT

INPUT POWER = -20dBm, Temperature = +25°C

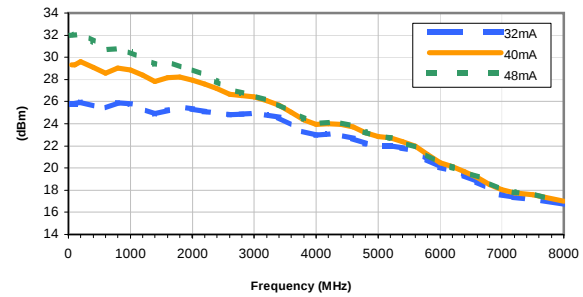


OUTPUT POWER at 1dB Compression vs. TEMPERATURE

CURRENT = 40mA

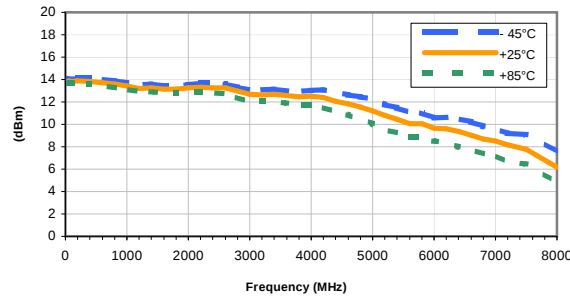


OUTPUT POWER at 1dB Compression vs. CURRENT

Temperature = +25°C

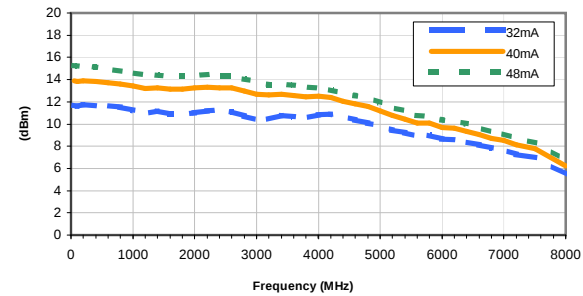


Noise Figure vs. TEMPERATURE

CURRENT = 40mA

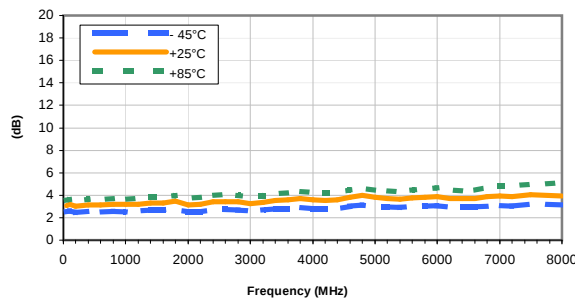

Noise Figure vs. CURRENT


Temperature = +25°C

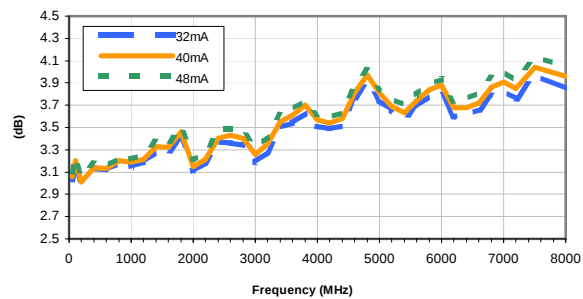

Typical Performance Curves


GAIN vs. TEMPERATURE

INPUT POWER = -20dBm, CURRENT = 40mA

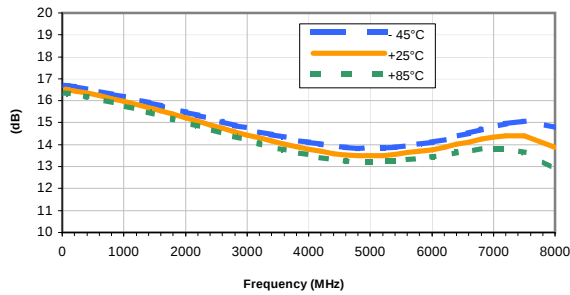


GAIN vs. CURRENT

INPUT POWER = -20dBm, Temperature = +25°C

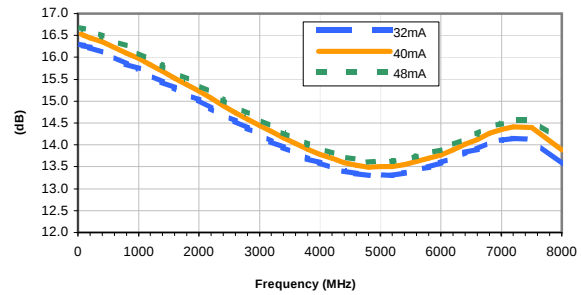


ISOLATION vs. TEMPERATURE

INPUT POWER = -20dBm, CURRENT = 40mA

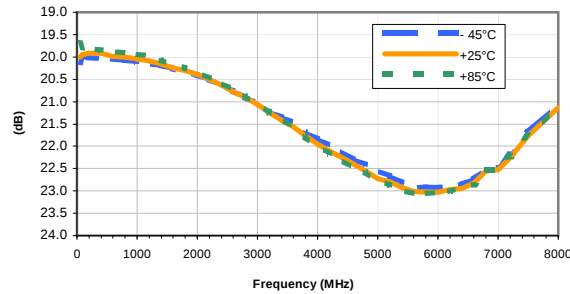


ISOLATION vs. CURRENT

INPUT POWER = -20dBm, Temperature = +25°C

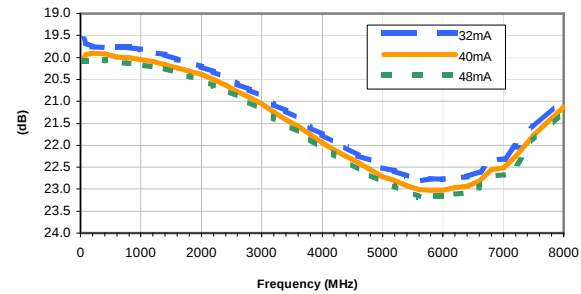


INPUT RETURN LOSS vs. TEMPERATURE

INPUT POWER = -20dBm, CURRENT = 40mA

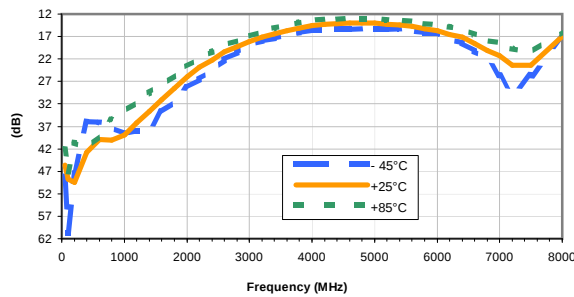


INPUT RETURN LOSS vs. CURRENT

INPUT POWER = -20dBm, Temperature = +25°C

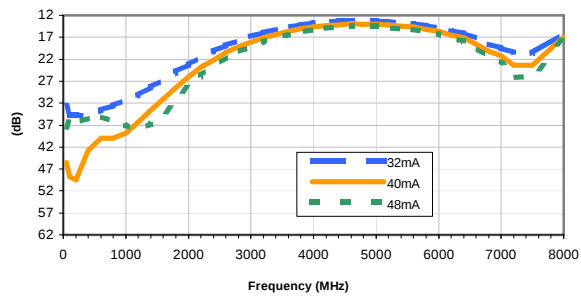


OUTPUT RETURN LOSS vs. TEMPERATURE

INPUT POWER = -20dBm, CURRENT = 40mA

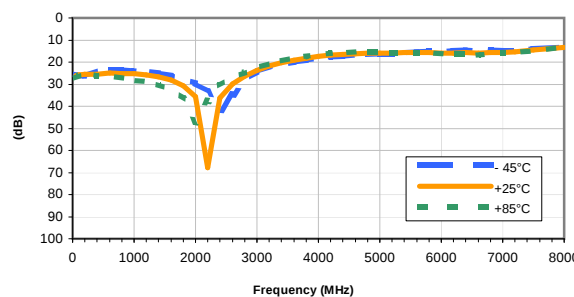

OUTPUT RETURN LOSS vs. CURRENT

INPUT POWER = -20dBm, Temperature = +25°C

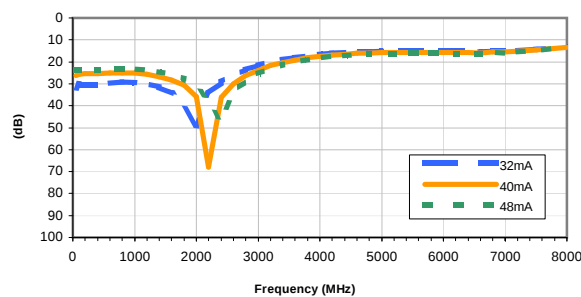

REV. X1

GALI-2+

070821

Page 1 of 2



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Curves


OUTPUT IP3 vs. TEMPERATURE

INPUT POWER = -20dBm, CURRENT = 40mA

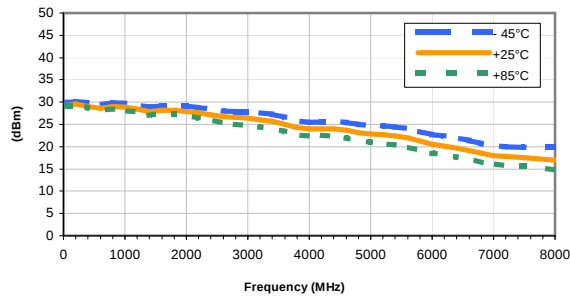


OUTPUT IP3 vs. CURRENT

INPUT POWER = -20dBm, Temperature = +25°C

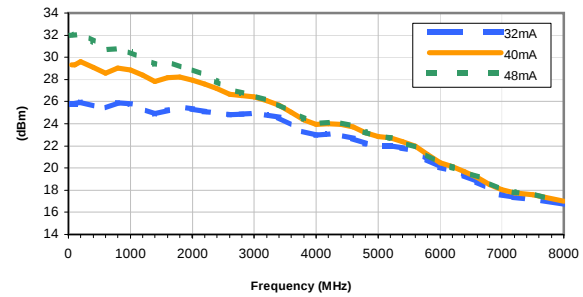


OUTPUT POWER at 1dB Compression vs. TEMPERATURE

CURRENT = 40mA

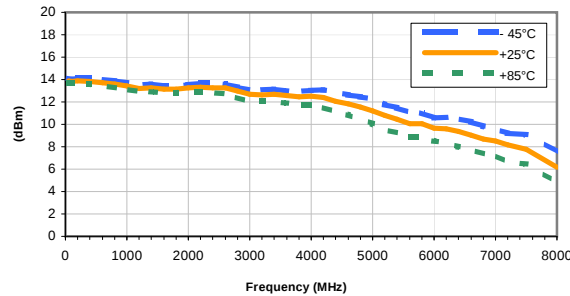


OUTPUT POWER at 1dB Compression vs. CURRENT

Temperature = +25°C

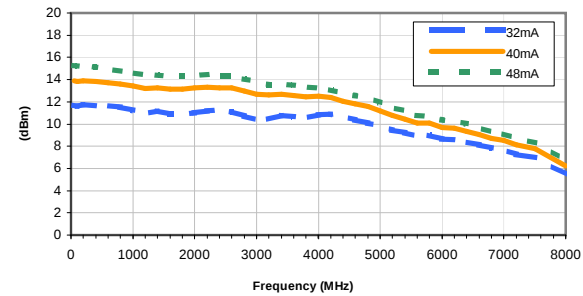


Noise Figure vs. TEMPERATURE

CURRENT = 40mA

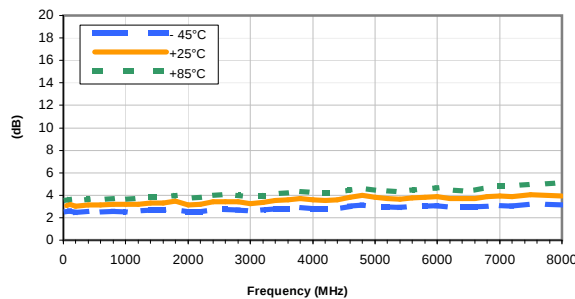


Noise Figure vs. CURRENT


Temperature = +25°C

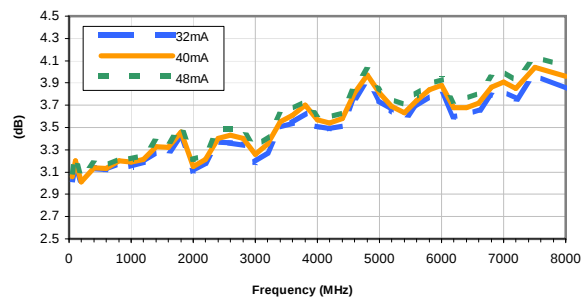

Outline Dimensions

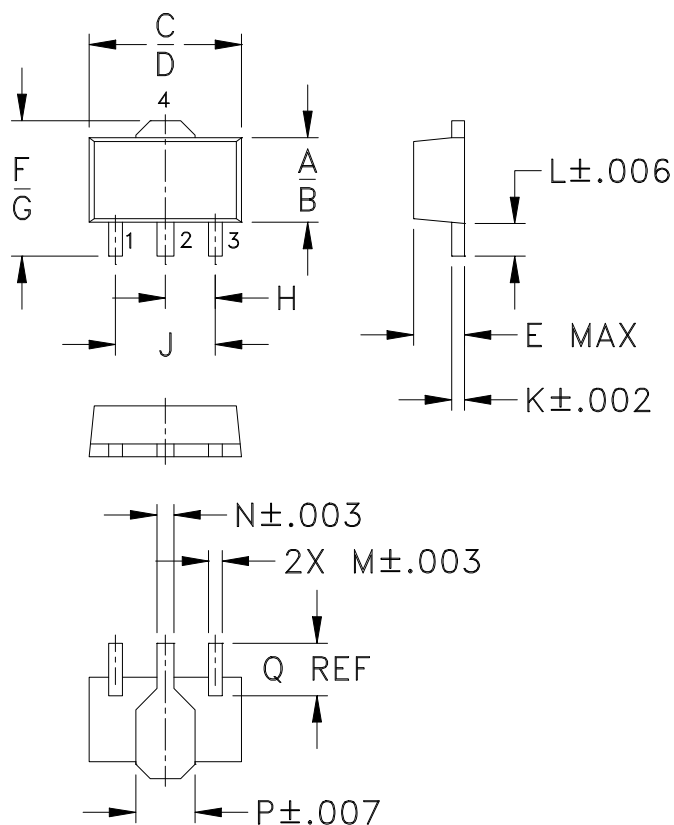

PCB Land Pattern

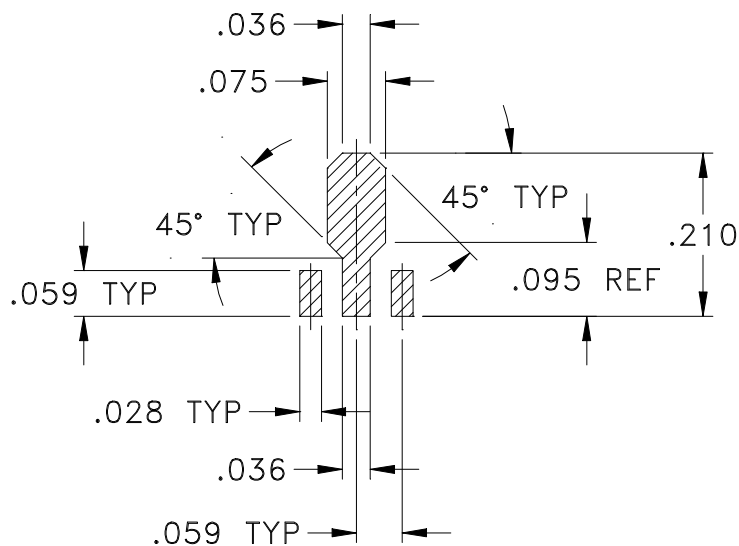

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
DF782	.102 (2.59)	.090 (2.29)	.181 (4.60)	.173 (4.39)	.063 (1.60)	.167 (4.24)	.155 (3.94)	.059 (1.50)	.118 (3.00)	.015 (0.38)	.041 (1.04)	.016 (0.41)

CASE #	N	P	Q	WT. GRAM
DF782	.019 (0.48)	.065 (1.65)	.062 (1.57)	.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin.
All models, (+) suffix. See model Data sheet.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



INTERNET <http://www.minicircuits.com>


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F55

DEVICE ORIENTATION IN T&R

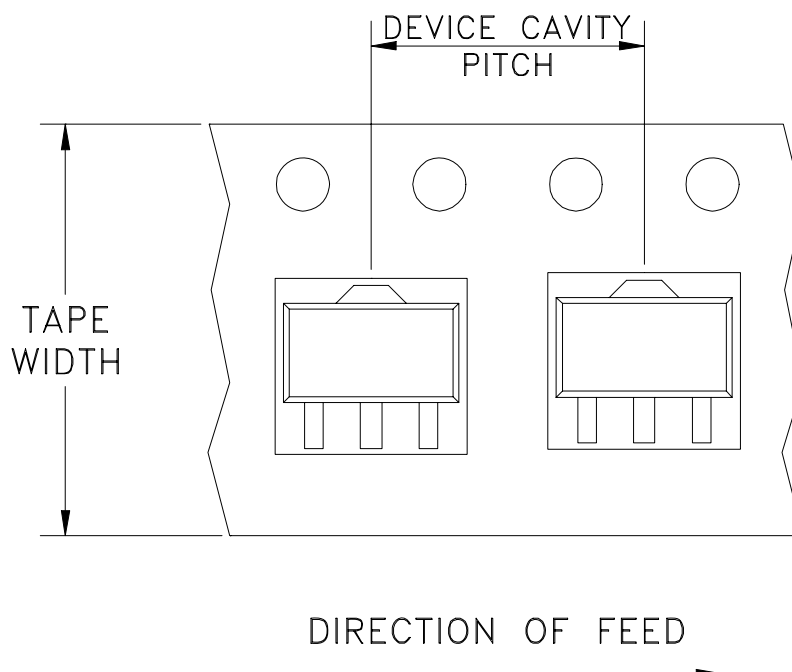

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
12	8	7	Small quantity standard (see note)	20
				50
				100
				200
				500
			Standard	1000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M76190	CHANGED DISCRIPTION	04/01	GF	CT
B	M82575	UPDATED DRAWING	08/05/02	AV	LC
C	M102713	ADDED NOTE 2 & "...WITH SMOBC"	01/17/06	MMG	IL
D	M108434	UPDATED DRAWING PER TB-409+	11/14/06	PW	IG

Technical drawing of a microelectronic package showing top and side views with dimensions and labels.

Top View Dimensions:

- Overall width: .240
- Overall height: .139
- Distance from top edge to center of top pins: .124
- Distance from center of top pins to center of bottom pins: .074
- Distance from center of bottom pins to bottom edge: .024
- Distance from left edge to center of left pins: .036
- Distance from center of left pins to center of top pins: .100
- Distance from center of top pins to center of right pins: .075
- Distance from center of right pins to right edge: .036
- Distance from left edge to center of left pins: .036
- Distance from center of left pins to center of top pins: .100
- Distance from center of top pins to center of right pins: .075
- Distance from center of right pins to right edge: .036
- Distance from left edge to center of left pins: .036
- Distance from center of left pins to center of top pins: .100
- Distance from center of top pins to center of right pins: .075
- Distance from center of right pins to right edge: .036

Side View Dimensions:

- Overall height: .096 TYP
- Distance from top edge to center of top pins: .020 TYP
- Distance from center of top pins to center of bottom pins: .059 TYP
- Distance from center of bottom pins to bottom edge: .020 TYP
- Distance from left edge to center of left pins: .020 TYP
- Distance from center of left pins to center of top pins: .028 TYP
- Distance from center of top pins to center of right pins: .027 TYP
- Distance from center of right pins to right edge: .020 TYP
- Distance from left edge to center of left pins: .020 TYP
- Distance from center of left pins to center of top pins: .028 TYP
- Distance from center of top pins to center of right pins: .027 TYP
- Distance from center of right pins to right edge: .020 TYP

Labels:

- 8X ϕ .020 PTH FOR GROUND
- 45° TYP
- PIN 1
- PACKAGE OUTLINE
- WIDTH, 2 PL. (SEE NOTE BELOW)

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE _____

DIMENSIONS ARE IN INCHES

DRAWN

AV

01/15/01

TOLERANCES ON:

QUESTIONS

01 / 39 / 01

2 PL DECIMALS $\pm$
3 PL DECIMALS $\pm$.005

CHECKED
APPROVE

01/23/01

ANGLES $\pm$
FRACTIONS $\pm$

 Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

11

Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL, mz, DF782, GALI, TB-409-XXX+

SIZE
A

CODE IDENT
15542

DRAWING NO:
98-PL-019

REV:	D
------	---


FILE: 98PL019

SCALE: 10:1


SHEET: 1 OF 1

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

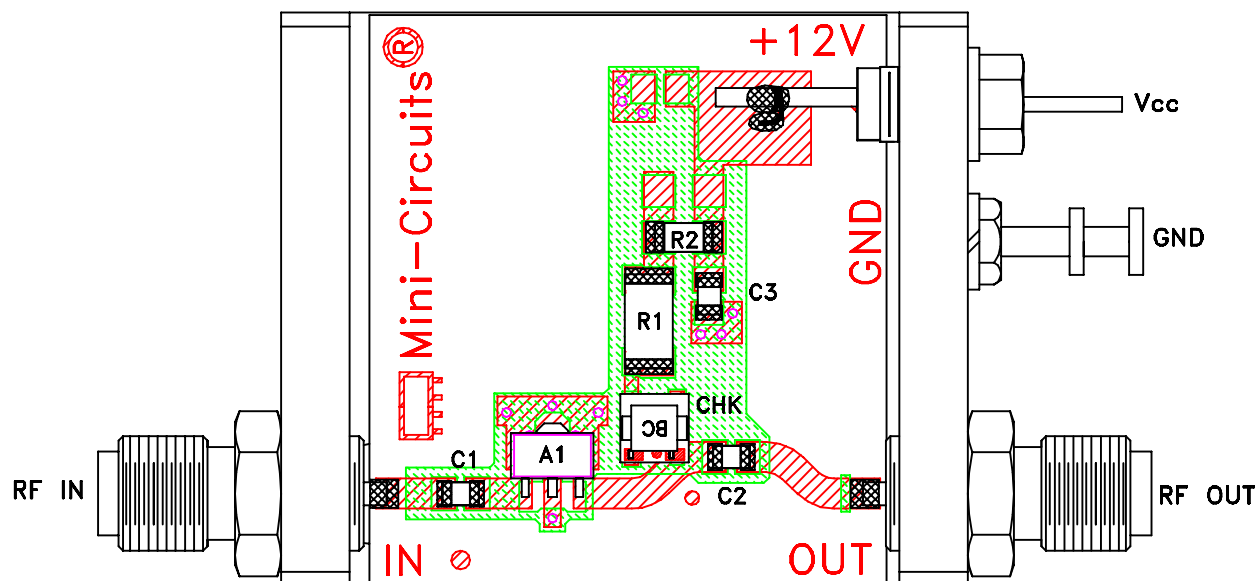

TB-409-2+

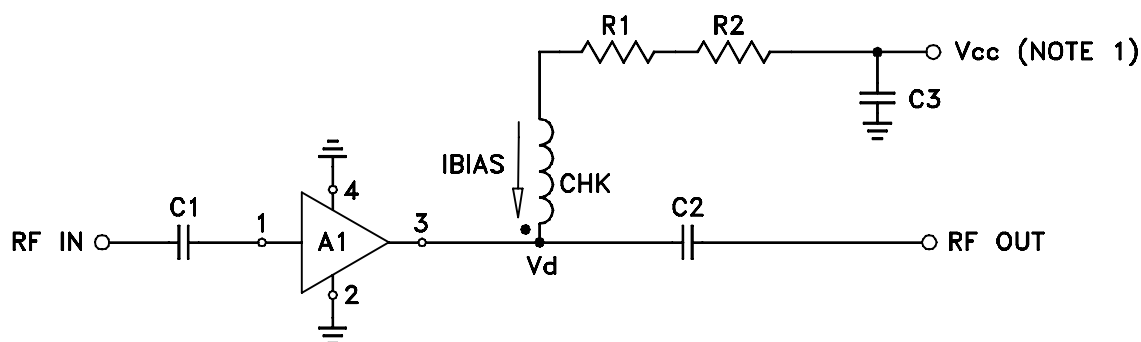

COMPONENT	VALUE
A1	Gali-2(+)
C1 (NOTE 4)	2400 pF
C2 (NOTE 4)	2400 pF
C3 (bypass)	0.1 uF
R1	210 Ohms, 0.75W
R2	3.01 Ohms, 0.25W
CHK	Mini-Circuits TCCH-80+

Schematic Diagram

NOTE:

1. Vcc voltage: $+12 \pm 0.2V$.
2. SMA Female connectors.
3. PCB material: Rogers R04350 or equivalent, dielectric constant=3.5, dielectric thickness=.030 inch.
4. Capacitors, C1 & C2 should be free of resonance up to the highest frequency specified.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-45° to 85°C or -40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-65° to 150° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Mechanical Shock	1.5Kg, 0.5 ms, 5 shock pulses, Y1 direction only	MIL-STD-883, Method 2002, Condition B, except Y1 direction only
Vibration (Variable Frequency)	50g peak	MIL-STD-883, Method 2007, Condition B
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102, Condition C
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 260°C peak	J-STD-020
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether +	MIL-STD-202, Method 215



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
	monoethanolamine at 63°C to 70°C	