

Surface Mount

Monolithic Amplifier

DC-3 GHz

Product Features

- InGaP HBT microwave amplifier
- Miniature SOT-89 package
- Internally Matched to 50 Ohms
- Frequency range, DC to 3 GHz
- Output power, 12.5 dBm typ.
- Excellent package for heat dissipation, exposed metal bottom
- Low thermal resistance for high reliability
- Aqueous washable
- Protected by US Patent 6,943,629

Typical Applications

- Cellular
- PCS
- Communication receivers & transmitters



Generic photo used for illustration purposes only

Gali 3+

CASE STYLE: DF782



+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

General Description

Gali3+ (RoHS compliant) is a wideband amplifier offering high dynamic range. Lead finish is SnAgNi. It has repeatable performance from lot to lot, and is enclosed in a SOT-89 package. It uses patented Transient Protected Darlington configuration and is fabricated using InGaP HBT technology. Expected MTTF is 20,000 years at 85°C case temperature. Gali3+ is designed to be rugged for ESD and supply switch-on transients.

simplified schematic and pin description

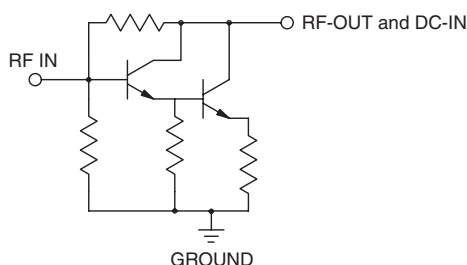

Function	Pin Number	Description
RF IN	1	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.
RF-OUT and DC-IN	3	RF output and bias pin. DC voltage is present on this pin; therefore a DC blocking capacitor is necessary for proper operation. An RF choke is needed to feed DC bias without loss of RF signal due to the bias connection, as shown in "Recommended Application Circuit".
GND	2,4	Connections to ground. Use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. S
M151107
EE-7974Q
GALI-3+
RS/YB/FL/AM
200430
Page 1 of 4

Electrical Specifications at 25°C and 35mA, unless noted

Parameter		Min.	Typ.	Max.	Units
Frequency Range*		DC		3	GHz
Gain	f=0.1 GHz	—	22.4	—	dB
	f=1 GHz	—	21.1	—	
	f=2 GHz	17.5	19.1	—	
	f=3 GHz	—	17.3	—	
	f=4 GHz	—	16.1	—	
	f=6 GHz	—	15.8	—	
Input Return Loss	f= DC to 3 GHz		14		dB
Output Return Loss	f= DC to 3 GHz		21		dB
Output Power @ 1 dB compression	f=2 GHz	10.5	12.5	—	dBm
Output IP3	f=2 GHz		25		dBm
Noise Figure	f=2 GHz		3.5		dB
Recommended Device Operating Current			35		mA
Device Operating Voltage		3.0	3.3	4.1	V
Device Voltage Variation vs. Temperature at 35 mA			-2.4		mV/°C
Device Voltage Variation vs. Current at 25°C			5.0		mV/mA
Thermal Resistance, junction-to-case ¹			127		°C/W

*Guaranteed specification DC-3 GHz. Low frequency cut off determined by external coupling capacitors.

Absolute Maximum Ratings

Parameter	Ratings
Operating Temperature*	-45°C to 85°C
Storage Temperature	-65°C to 150°C
Operating Current	55mA
Input Power	13dBm

Note: Permanent damage may occur if any of these limits are exceeded.
These ratings are not intended for continuous normal operation.

¹Case is defined as ground leads.


*Based on typical case temperature rise 2°C above ambient.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Product Marking



Markings in addition to model number designation may appear for internal quality control purposes.

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Performance data, graphs, s-parameter data set (.zip file)

Case Style: DF782

Plastic package, exposed paddle, lead finish: Matte-Tin

Tape & Reel: F55


7” reels with 20, 50, 100, 200, 500, 1K devices.

Suggested Layout for PCB Design: PL-019

Evaluation Board: TB-409-3+

Environmental Ratings: ENV08T2

Recommended Application Circuit

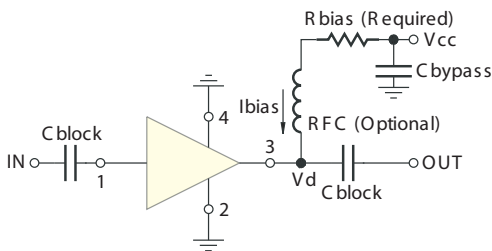

Test Board includes case, connectors, and components (in bold) soldered to PCB

R BIAS	
Vcc	“1%” Res. Values (ohms) for Optimum Biasing
7	107
8	133
9	162
10	191
11	221
12	249
13	280
14	309
15	340
16	365
17	392
18	422
19	453
20	475

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

ESD Rating

Human Body Model (HBM): Class 1A (250v to < 500v) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M1 (< 100v) in accordance with ANSI/ESD STM 5.2 - 1999

MSL Rating

Moisture Sensitivity: MSL1 in accordance with IPC/JEDECJ-STD-020C

No.	Test Required	Condition	Standard	Quantity
1	Visual Inspection	Low Power Microscope Magnification 40x	MIP-IN-0003 (MCT spec)	45 units
2	Electrical Test	Room Temperature	SCD (MCL spec)	45 units
3	SAM Analysis	Less than 10% growth in term of delamination	J-Std-020C (Jedec Standard)	45 units
4	Moisture Sensitivity Level 1	Bake at 125°C for 24 hours Soak at 85°C/85%RH for 168 hours Reflow 3 cycles at 260°C peak	J-Std-020C (Jedec Standard)	45 units

MSL Test Flow Chart**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Typical Performance Data

**NOTE: Use PDF Bookmarks to view DATA at required conditions
or to view GRAPHS.**

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 35mA, Vd = 3.56V @Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	23.22	25.63	29.03	46.97	1.04	0.76	27.39	13.27	2.54
100	23.23	25.91	26.80	40.78	1.05	0.73	27.52	13.21	2.67
150	23.16	25.97	27.91	48.10	1.05	0.72	28.02	13.28	2.60
200	23.11	25.96	26.97	41.53	1.05	0.72	27.70	13.29	2.45
250	23.06	25.91	26.48	42.06	1.05	0.72	26.57	13.24	2.56
300	22.97	25.78	26.13	40.22	1.05	0.72	27.58	13.13	2.77
350	22.90	25.97	26.14	38.68	1.06	0.70	27.24	13.11	2.68
400	22.81	25.86	25.99	37.35	1.06	0.70	27.04	13.10	2.56
450	22.71	25.89	26.12	35.90	1.07	0.69	26.61	12.96	2.60
500	22.61	25.81	25.33	34.91	1.07	0.69	26.88	13.08	2.76
550	22.51	25.77	25.00	34.05	1.07	0.69	26.74	13.03	2.70
600	22.42	25.70	24.60	33.05	1.07	0.68	26.63	13.04	2.53
650	22.31	25.67	24.21	32.09	1.07	0.68	26.47	13.04	2.61
700	22.21	25.68	23.76	31.36	1.08	0.67	26.85	12.98	2.63
750	22.09	25.64	23.58	30.34	1.08	0.66	26.87	12.87	2.62
800	21.97	25.64	23.19	29.98	1.08	0.65	26.72	12.76	2.54
850	21.86	25.56	22.90	29.47	1.08	0.65	26.67	12.77	2.53
900	21.75	25.55	22.67	28.93	1.09	0.64	26.81	12.66	2.69
940	21.65	25.48	22.44	28.42	1.09	0.64	26.89	12.56	2.69
1000	21.50	25.49	22.05	27.97	1.10	0.63	26.75	12.60	2.55
1100	21.29	25.37	21.50	27.56	1.10	0.62	26.58	12.58	2.71
1200	21.04	25.25	21.06	27.09	1.11	0.61	26.51	12.60	2.60
1300	20.80	25.26	20.78	26.44	1.12	0.59	26.55	12.58	2.71
1400	20.57	25.22	20.45	26.14	1.13	0.58	26.25	12.66	2.71
1500	20.34	25.14	20.13	25.81	1.14	0.57	26.37	12.40	2.83
1600	20.10	25.10	19.64	25.69	1.15	0.56	26.81	12.46	2.73
1700	19.85	25.03	19.31	25.60	1.17	0.55	27.23	12.33	2.74
1800	19.62	24.92	19.15	25.37	1.17	0.54	26.83	12.46	2.79
1900	19.40	24.92	18.76	25.30	1.19	0.53	26.23	12.42	2.75
2000	19.18	24.86	18.46	25.18	1.20	0.52	26.27	12.33	2.78
2100	18.94	24.78	18.10	24.95	1.21	0.51	25.76	12.42	2.75
2200	18.73	24.77	17.83	24.68	1.23	0.50	25.90	12.16	2.75
2300	18.50	24.73	17.52	24.14	1.25	0.49	25.53	12.04	2.75
2400	18.28	24.64	17.18	23.78	1.26	0.48	25.26	11.77	2.81
2500	18.08	24.61	16.74	23.35	1.27	0.47	25.13	11.72	2.72
2600	17.85	24.69	16.38	22.79	1.30	0.46	24.67	11.44	2.81
2700	17.67	24.56	16.34	22.77	1.31	0.46	24.60	11.23	2.78
2800	17.46	24.55	16.06	22.11	1.32	0.45	24.40	11.06	2.83
2900	17.28	24.48	15.75	21.66	1.33	0.44	24.23	10.93	2.79
3000	17.08	24.53	15.53	21.23	1.36	0.43	24.10	10.75	2.77

REV. X1
GALI-3+
070822

Page 1 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 28mA, Vd = 3.52V @Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	22.80	26.08	22.93	28.37	1.07	0.69	24.59	11.53	2.49
100	22.81	25.65	21.47	29.03	1.05	0.72	24.72	11.36	2.59
150	22.73	25.51	22.28	28.85	1.05	0.73	25.14	11.57	2.52
200	22.70	25.59	21.98	29.39	1.05	0.72	24.90	11.56	2.42
250	22.65	25.62	21.97	30.11	1.06	0.71	23.86	11.39	2.55
300	22.57	25.54	21.64	29.96	1.06	0.71	24.83	11.41	2.67
350	22.49	25.53	21.83	30.85	1.06	0.71	24.49	11.40	2.63
400	22.41	25.52	21.94	31.13	1.06	0.70	24.36	11.43	2.54
450	22.31	25.43	22.10	32.48	1.06	0.70	23.91	11.17	2.57
500	22.22	25.46	21.97	33.04	1.07	0.69	24.23	11.40	2.70
550	22.11	25.45	21.68	33.14	1.07	0.68	24.09	11.34	2.65
600	22.04	25.36	21.69	34.47	1.07	0.68	24.06	11.28	2.51
650	21.94	25.35	21.53	35.11	1.07	0.68	23.86	11.38	2.57
700	21.83	25.32	21.43	36.14	1.08	0.67	24.29	11.26	2.55
750	21.73	25.30	21.41	36.07	1.08	0.66	24.33	11.26	2.59
800	21.61	25.27	21.22	35.82	1.08	0.66	24.21	10.95	2.50
850	21.52	25.25	21.15	35.63	1.09	0.65	24.17	11.17	2.51
900	21.39	25.20	21.02	34.73	1.09	0.64	24.32	10.98	2.64
940	21.30	25.19	21.00	33.60	1.10	0.64	24.51	10.77	2.62
1000	21.15	25.19	20.70	33.18	1.10	0.63	24.36	10.92	2.52
1100	20.96	25.09	20.32	31.84	1.11	0.62	24.26	11.06	2.66
1200	20.70	25.05	20.04	30.82	1.12	0.61	24.28	11.03	2.56
1300	20.48	25.01	19.85	29.81	1.13	0.59	24.44	10.98	2.66
1400	20.26	24.94	19.46	28.99	1.14	0.58	24.19	11.07	2.67
1500	20.03	24.86	19.27	28.26	1.15	0.57	24.33	10.84	2.74
1600	19.82	24.85	18.86	27.58	1.16	0.56	24.84	10.94	2.70
1700	19.56	24.82	18.53	27.24	1.17	0.55	25.36	10.84	2.70
1800	19.36	24.72	18.38	26.67	1.18	0.54	25.28	11.02	2.73
1900	19.13	24.64	18.04	25.97	1.19	0.53	24.64	10.94	2.72
2000	18.91	24.66	17.72	25.55	1.21	0.52	24.81	10.87	2.72
2100	18.68	24.56	17.37	25.06	1.22	0.51	24.38	10.95	2.72
2200	18.47	24.61	17.13	24.51	1.24	0.50	24.57	10.63	2.67
2300	18.24	24.57	16.87	23.91	1.26	0.49	24.41	10.65	2.70
2400	18.04	24.55	16.50	23.30	1.27	0.48	24.25	10.43	2.75
2500	17.83	24.50	16.13	22.71	1.29	0.47	24.27	10.56	2.69
2600	17.59	24.51	15.84	22.06	1.31	0.46	23.87	10.50	2.72
2700	17.42	24.44	15.78	21.92	1.32	0.46	23.88	10.36	2.76
2800	17.22	24.50	15.51	21.26	1.34	0.44	23.73	10.26	2.74
2900	17.03	24.41	15.23	20.77	1.35	0.44	23.52	10.11	2.76
3000	16.85	24.36	15.02	20.33	1.36	0.44	23.53	9.97	2.70

REV. X1

GALI-3+

070822

Page 2 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 42mA, Vd = 3.59V @Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	23.50	26.28	39.25	31.09	1.05	0.73	29.80	14.30	2.56
100	23.50	26.29	32.42	29.95	1.05	0.73	29.94	14.30	2.74
150	23.42	26.30	34.20	30.15	1.05	0.72	30.56	14.29	2.65
200	23.37	26.25	31.58	29.39	1.05	0.72	30.05	14.25	2.47
250	23.32	26.25	30.58	29.25	1.06	0.71	28.82	14.27	2.61
300	23.23	26.12	29.71	29.33	1.05	0.72	29.76	14.16	2.82
350	23.15	26.16	29.12	28.51	1.06	0.71	29.40	14.13	2.73
400	23.07	26.09	28.57	28.16	1.06	0.71	29.13	14.04	2.58
450	22.95	26.07	28.11	27.59	1.06	0.70	28.72	14.02	2.64
500	22.85	26.03	27.02	27.58	1.06	0.69	28.81	13.98	2.83
550	22.75	26.03	26.32	27.22	1.07	0.68	28.59	14.01	2.77
600	22.66	26.00	25.81	26.65	1.07	0.68	28.42	14.02	2.56
650	22.54	25.95	25.12	26.40	1.07	0.67	28.27	13.94	2.64
700	22.43	25.86	24.44	25.91	1.07	0.67	28.57	13.89	2.69
750	22.32	25.88	24.20	25.57	1.08	0.66	28.47	13.73	2.71
800	22.20	25.84	23.71	25.32	1.08	0.65	28.25	13.69	2.57
850	22.08	25.79	23.39	25.03	1.08	0.65	28.21	13.58	2.57
900	21.96	25.75	23.10	24.98	1.09	0.64	28.27	13.49	2.75
940	21.86	25.73	22.71	24.89	1.09	0.64	28.20	13.43	2.77
1000	21.72	25.68	22.33	24.66	1.09	0.63	27.98	13.45	2.58
1100	21.50	25.59	21.74	24.41	1.10	0.62	27.76	13.27	2.79
1200	21.24	25.55	21.30	24.24	1.11	0.60	27.56	13.30	2.65
1300	21.00	25.46	20.91	24.01	1.12	0.59	27.45	13.35	2.80
1400	20.77	25.38	20.68	23.82	1.13	0.58	27.15	13.43	2.75
1500	20.52	25.28	20.32	23.80	1.14	0.57	27.28	13.10	2.86
1600	20.30	25.27	19.89	23.78	1.15	0.56	27.48	13.07	2.80
1700	20.04	25.13	19.50	24.03	1.16	0.55	27.57	12.94	2.80
1800	19.82	25.05	19.41	24.02	1.17	0.54	27.02	13.01	2.84
1900	19.59	25.05	19.08	24.12	1.18	0.53	26.55	13.04	2.82
2000	19.37	24.99	18.79	24.30	1.20	0.52	26.53	12.91	2.83
2100	19.14	24.94	18.42	24.21	1.21	0.51	25.99	13.01	2.81
2200	18.92	24.91	18.12	24.19	1.22	0.50	26.07	12.68	2.80
2300	18.68	24.82	17.84	23.94	1.24	0.49	25.62	12.59	2.81
2400	18.47	24.83	17.50	23.78	1.26	0.48	25.39	12.28	2.91
2500	18.27	24.70	17.06	23.45	1.26	0.48	25.19	12.14	2.79
2600	18.03	24.78	16.70	23.03	1.29	0.46	24.73	11.84	2.88
2700	17.85	24.65	16.63	23.14	1.30	0.46	24.67	11.56	2.84
2800	17.63	24.65	16.37	22.55	1.32	0.45	24.35	11.39	2.90
2900	17.46	24.61	16.03	22.08	1.33	0.44	24.28	11.27	2.84
3000	17.26	24.54	15.80	21.77	1.34	0.44	24.09	11.02	2.86

REV. X1

GALI-3+

070822

Page 3 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 35mA, Vd = 3.73V @Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	23.55	25.81	36.47	31.40	1.03	0.77	28.00	13.77	1.99
100	23.56	26.37	30.53	31.38	1.05	0.72	28.11	13.65	2.13
150	23.49	26.24	31.43	32.43	1.05	0.73	28.54	13.79	2.05
200	23.45	26.37	29.78	31.45	1.05	0.71	28.26	13.77	1.92
250	23.39	26.27	29.74	30.97	1.05	0.72	27.24	13.74	2.01
300	23.32	26.28	29.30	30.11	1.06	0.71	28.24	13.69	2.23
350	23.24	26.13	29.13	29.27	1.05	0.72	27.92	13.64	2.14
400	23.16	26.02	28.72	28.97	1.05	0.72	27.78	13.68	2.01
450	23.05	26.07	28.42	28.45	1.06	0.70	27.35	13.57	2.06
500	22.96	26.04	27.26	28.04	1.06	0.70	27.67	13.65	2.19
550	22.87	26.00	26.60	27.71	1.06	0.70	27.50	13.54	2.12
600	22.78	25.96	26.14	27.19	1.06	0.69	27.47	13.59	1.98
650	22.66	25.84	25.52	26.94	1.06	0.69	27.28	13.63	2.04
700	22.56	25.86	24.97	26.28	1.07	0.68	27.77	13.51	2.06
750	22.46	25.86	24.63	25.69	1.07	0.67	27.74	13.48	2.06
800	22.34	25.81	24.14	25.69	1.07	0.67	27.62	13.31	1.96
850	22.24	25.79	23.72	25.30	1.08	0.66	27.57	13.39	1.97
900	22.11	25.75	23.53	25.11	1.08	0.65	27.75	13.25	2.12
940	22.03	25.70	23.33	24.73	1.08	0.65	27.89	13.15	2.10
1000	21.88	25.64	22.95	24.40	1.08	0.64	27.76	13.20	1.97
1100	21.68	25.54	22.50	23.95	1.09	0.64	27.61	13.23	2.12
1200	21.42	25.48	22.11	23.63	1.10	0.62	27.57	13.20	2.01
1300	21.18	25.38	21.68	23.28	1.10	0.61	27.71	13.22	2.15
1400	20.98	25.29	21.37	23.24	1.11	0.60	27.45	13.26	2.09
1500	20.74	25.25	20.89	23.41	1.12	0.59	27.63	13.10	2.20
1600	20.52	25.16	20.45	23.18	1.13	0.58	28.07	13.14	2.11
1700	20.28	25.10	20.21	23.18	1.14	0.57	28.48	13.06	2.13
1800	20.08	25.05	20.21	23.12	1.15	0.56	28.23	13.19	2.19
1900	19.84	24.99	19.82	23.05	1.16	0.55	27.58	13.18	2.15
2000	19.63	24.93	19.40	23.42	1.17	0.54	27.70	13.10	2.14
2100	19.40	24.89	19.09	23.18	1.19	0.53	27.15	13.15	2.12
2200	19.20	24.83	18.75	23.36	1.20	0.52	27.38	12.96	2.11
2300	18.97	24.70	18.54	23.01	1.20	0.51	26.98	12.87	2.13
2400	18.78	24.68	18.26	22.87	1.22	0.51	26.80	12.66	2.17
2500	18.56	24.59	17.68	22.32	1.23	0.50	26.74	12.66	2.11
2600	18.33	24.66	17.02	21.85	1.25	0.48	26.23	12.47	2.15
2700	18.17	24.56	16.99	22.12	1.26	0.48	26.24	12.32	2.16
2800	17.93	24.57	16.87	21.48	1.28	0.47	25.98	12.15	2.19
2900	17.80	24.46	16.46	21.21	1.28	0.47	25.89	12.03	2.14
3000	17.61	24.39	16.28	20.94	1.29	0.46	25.75	11.86	2.11

REV. X1

GALI-3+

070822

Page 4 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 28mA, Vd = 3.70V @Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	23.17	25.51	25.87	39.51	1.04	0.76	24.98	12.05	1.95
100	23.19	25.82	24.26	38.69	1.04	0.74	25.09	11.70	2.07
150	23.13	25.96	24.56	39.24	1.05	0.72	25.49	11.94	2.01
200	23.09	25.90	24.22	40.61	1.05	0.72	25.22	11.96	1.91
250	23.03	25.74	24.06	41.88	1.05	0.73	24.31	11.81	2.00
300	22.95	25.84	24.26	43.23	1.05	0.72	25.25	11.82	2.19
350	22.88	25.74	24.37	45.97	1.05	0.72	24.93	11.74	2.09
400	22.82	25.78	24.75	45.08	1.06	0.71	24.84	11.84	2.01
450	22.72	25.68	24.80	41.60	1.06	0.71	24.42	11.59	2.03
500	22.63	25.70	24.35	40.73	1.06	0.70	24.79	11.82	2.14
550	22.52	25.65	23.95	40.40	1.06	0.70	24.63	11.68	2.10
600	22.44	25.58	23.81	38.09	1.06	0.70	24.64	11.75	1.98
650	22.35	25.55	23.65	36.02	1.06	0.69	24.43	11.87	2.00
700	22.24	25.57	23.32	33.85	1.07	0.68	24.88	11.59	2.01
750	22.14	25.55	23.25	32.97	1.07	0.67	24.91	11.67	1.99
800	22.02	25.52	23.05	32.55	1.08	0.67	24.81	11.29	1.95
850	21.93	25.50	22.80	31.19	1.08	0.66	24.76	11.59	1.95
900	21.82	25.46	22.75	30.51	1.08	0.66	24.93	11.40	2.06
940	21.74	25.38	22.65	29.48	1.08	0.66	25.16	11.16	2.04
1000	21.59	25.30	22.35	29.07	1.08	0.65	25.03	11.21	1.95
1100	21.37	25.29	22.02	27.87	1.09	0.63	24.94	11.44	2.09
1200	21.16	25.22	21.72	27.04	1.10	0.62	24.99	11.48	1.97
1300	20.92	25.12	21.35	26.33	1.11	0.61	25.22	11.44	2.09
1400	20.70	25.09	20.95	26.04	1.12	0.60	25.01	11.47	2.06
1500	20.49	25.03	20.54	25.94	1.13	0.59	25.19	11.27	2.16
1600	20.26	24.98	20.13	25.31	1.14	0.58	25.69	11.41	2.09
1700	20.04	24.88	19.91	25.18	1.14	0.57	26.12	11.31	2.08
1800	19.82	24.84	19.82	24.81	1.16	0.56	26.16	11.54	2.15
1900	19.60	24.77	19.42	24.50	1.17	0.55	25.54	11.45	2.11
2000	19.41	24.73	19.01	24.47	1.18	0.54	25.77	11.40	2.10
2100	19.16	24.66	18.68	24.18	1.19	0.53	25.33	11.40	2.09
2200	18.97	24.66	18.34	24.00	1.20	0.52	25.64	11.21	2.04
2300	18.76	24.58	18.09	23.43	1.21	0.51	25.46	11.16	2.09
2400	18.55	24.54	17.78	23.01	1.23	0.50	25.38	11.03	2.12
2500	18.35	24.55	17.29	22.35	1.25	0.49	25.54	11.19	2.08
2600	18.12	24.50	16.66	21.63	1.26	0.49	25.15	11.20	2.09
2700	17.95	24.48	16.58	21.67	1.27	0.48	25.29	11.23	2.11
2800	17.71	24.44	16.56	21.14	1.29	0.47	25.14	11.16	2.09
2900	17.59	24.40	16.07	20.73	1.30	0.47	24.98	11.11	2.13
3000	17.39	24.38	15.90	20.40	1.31	0.46	25.02	10.92	2.06

REV. X1

GALI-3+

070822

Page 5 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 42mA, Vd = 3.76V @Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	23.78	25.98	41.20	24.96	1.03	0.78	30.47	14.94	2.04
100	23.78	26.57	39.00	25.93	1.05	0.73	30.61	14.92	2.20
150	23.71	26.36	37.14	26.39	1.05	0.74	31.17	14.94	2.10
200	23.67	26.42	33.85	26.06	1.05	0.73	30.75	14.96	1.95
250	23.63	26.38	32.72	25.70	1.05	0.73	29.61	14.98	2.07
300	23.53	26.27	31.55	25.48	1.05	0.73	30.59	14.87	2.32
350	23.46	26.40	30.28	24.92	1.05	0.71	30.25	14.82	2.19
400	23.36	26.32	29.67	24.64	1.05	0.71	30.02	14.80	2.03
450	23.26	26.25	28.93	24.26	1.06	0.71	29.62	14.74	2.07
500	23.17	26.22	27.74	24.24	1.06	0.70	29.84	14.76	2.25
550	23.07	26.20	26.84	24.25	1.06	0.70	29.64	14.73	2.18
600	22.99	26.18	26.24	23.96	1.06	0.69	29.54	14.74	2.00
650	22.87	26.18	25.54	23.55	1.07	0.68	29.36	14.72	2.08
700	22.76	26.15	24.75	23.18	1.07	0.67	29.78	14.67	2.12
750	22.65	25.98	24.42	23.00	1.07	0.68	29.70	14.54	2.10
800	22.55	26.03	23.86	22.80	1.07	0.67	29.47	14.46	1.99
850	22.42	25.96	23.47	22.66	1.07	0.66	29.45	14.42	2.01
900	22.30	25.92	23.23	22.50	1.08	0.66	29.61	14.34	2.17
940	22.21	25.82	22.96	22.41	1.08	0.66	29.58	14.26	2.16
1000	22.07	25.79	22.68	22.21	1.08	0.65	29.40	14.31	2.01
1100	21.86	25.68	22.21	21.87	1.08	0.64	29.22	14.20	2.17
1200	21.60	25.62	21.80	21.67	1.09	0.62	29.06	14.24	2.03
1300	21.38	25.56	21.40	21.62	1.10	0.61	29.04	14.26	2.20
1400	21.15	25.47	21.16	21.58	1.11	0.60	28.70	14.31	2.14
1500	20.91	25.38	20.74	21.78	1.12	0.59	28.89	14.12	2.27
1600	20.67	25.35	20.35	21.78	1.13	0.58	29.10	14.09	2.18
1700	20.44	25.28	20.13	21.92	1.14	0.57	29.35	14.04	2.19
1800	20.23	25.14	20.14	21.97	1.14	0.56	28.80	14.06	2.23
1900	20.00	25.09	19.80	22.00	1.15	0.55	28.33	14.07	2.20
2000	19.80	25.00	19.51	22.49	1.16	0.54	28.36	14.03	2.20
2100	19.57	24.90	19.21	22.44	1.17	0.53	27.83	14.06	2.19
2200	19.35	24.87	18.83	22.72	1.19	0.52	27.95	13.86	2.15
2300	19.13	24.78	18.64	22.58	1.20	0.52	27.44	13.71	2.15
2400	18.94	24.73	18.44	22.59	1.21	0.51	27.24	13.45	2.22
2500	18.71	24.75	17.95	22.27	1.23	0.50	27.03	13.34	2.18
2600	18.48	24.69	17.19	21.90	1.24	0.49	26.56	13.07	2.20
2700	18.33	24.58	17.16	22.31	1.24	0.49	26.51	12.80	2.21
2800	18.08	24.64	17.02	21.68	1.27	0.47	26.19	12.62	2.25
2900	17.96	24.52	16.61	21.59	1.27	0.47	26.14	12.51	2.20
3000	17.77	24.48	16.47	21.28	1.28	0.47	25.93	12.31	2.18

REV. X1

GALI-3+

070822

Page 6 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 35mA, Vd = 3.42V @Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	22.93	25.69	25.83	34.17	1.05	0.73	27.18	12.86	3.01
100	22.93	25.92	24.19	35.17	1.06	0.71	27.35	12.78	3.14
150	22.86	25.90	24.89	35.83	1.06	0.71	27.90	12.87	3.06
200	22.82	25.66	24.70	37.71	1.05	0.72	27.56	12.84	2.92
250	22.77	25.72	24.38	40.05	1.06	0.71	26.35	12.78	3.03
300	22.66	25.73	23.99	39.86	1.06	0.70	27.36	12.70	3.23
350	22.59	25.62	23.84	41.26	1.06	0.71	26.99	12.69	3.15
400	22.50	25.71	23.74	40.34	1.07	0.69	26.77	12.64	3.03
450	22.39	25.68	23.77	42.83	1.07	0.69	26.32	12.58	3.08
500	22.29	25.58	23.28	44.94	1.07	0.68	26.52	12.62	3.24
550	22.20	25.59	22.93	45.58	1.07	0.68	26.33	12.58	3.16
600	22.09	25.59	22.65	44.87	1.08	0.67	26.21	12.59	2.99
650	21.97	25.59	22.49	42.46	1.08	0.66	26.05	12.55	3.10
700	21.87	25.45	22.35	39.85	1.08	0.66	26.39	12.52	3.10
750	21.76	25.44	22.22	37.80	1.09	0.65	26.36	12.35	3.12
800	21.64	25.43	21.97	36.73	1.09	0.65	26.17	12.26	3.02
850	21.52	25.39	21.63	36.13	1.09	0.64	26.14	12.26	3.02
900	21.41	25.36	21.36	34.99	1.10	0.63	26.25	12.15	3.19
940	21.32	25.37	21.21	34.09	1.10	0.63	26.28	12.00	3.18
1000	21.17	25.30	20.76	32.91	1.11	0.62	26.10	12.07	3.04
1100	20.93	25.24	20.33	31.70	1.12	0.61	25.90	12.00	3.20
1200	20.68	25.17	19.89	31.12	1.13	0.59	25.77	11.97	3.10
1300	20.44	25.11	19.59	29.65	1.14	0.58	25.74	11.96	3.24
1400	20.19	25.02	19.29	29.01	1.15	0.57	25.42	12.07	3.22
1500	19.96	25.00	18.95	28.69	1.16	0.56	25.56	11.72	3.32
1600	19.70	24.93	18.45	27.79	1.17	0.55	25.97	11.72	3.27
1700	19.46	24.93	18.10	27.71	1.19	0.53	26.21	11.57	3.27
1800	19.23	24.84	17.97	27.05	1.20	0.52	25.68	11.67	3.31
1900	18.99	24.78	17.65	26.69	1.21	0.51	25.11	11.68	3.28
2000	18.78	24.76	17.33	26.40	1.23	0.50	25.12	11.49	3.31
2100	18.52	24.72	17.06	25.63	1.24	0.49	24.57	11.68	3.29
2200	18.29	24.71	16.77	25.08	1.26	0.48	24.64	11.30	3.28
2300	18.07	24.70	16.48	24.37	1.28	0.47	24.23	11.19	3.27
2400	17.84	24.65	16.25	23.93	1.30	0.46	23.97	10.84	3.39
2500	17.64	24.57	15.92	23.46	1.31	0.46	23.72	10.80	3.28
2600	17.41	24.60	15.63	22.84	1.33	0.44	23.28	10.48	3.35
2700	17.21	24.52	15.59	22.70	1.35	0.44	23.16	10.22	3.34
2800	16.99	24.60	15.35	21.95	1.38	0.43	22.92	10.07	3.36
2900	16.81	24.62	15.10	21.53	1.40	0.42	22.73	9.92	3.37
3000	16.60	24.49	14.95	21.17	1.41	0.41	22.56	9.68	3.31

REV. X1

GALI-3+

070822

Page 7 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 28mA, Vd = 3.38V @Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	22.47	25.49	20.64	23.59	1.06	0.71	24.44	11.37	2.98
100	22.47	25.61	19.78	24.17	1.06	0.70	24.59	11.11	3.08
150	22.39	25.40	20.28	24.49	1.06	0.71	25.05	11.35	3.02
200	22.35	25.46	20.06	25.32	1.06	0.70	24.83	11.35	2.90
250	22.29	25.18	20.22	25.43	1.05	0.72	23.69	11.18	3.00
300	22.23	25.26	20.05	25.47	1.06	0.71	24.68	11.17	3.18
350	22.14	25.41	20.09	25.43	1.07	0.69	24.34	11.15	3.10
400	22.07	25.18	19.97	25.63	1.06	0.70	24.19	11.18	3.02
450	21.96	25.30	20.08	26.15	1.07	0.69	23.73	10.96	3.05
500	21.86	25.22	19.84	26.71	1.07	0.68	24.00	11.09	3.15
550	21.76	25.18	19.88	27.13	1.07	0.68	23.86	11.09	3.11
600	21.69	25.13	19.89	27.15	1.08	0.68	23.81	11.03	2.99
650	21.58	25.17	19.74	27.82	1.08	0.67	23.61	11.06	3.05
700	21.47	25.07	19.74	28.45	1.08	0.66	24.00	11.02	3.05
750	21.37	25.04	19.85	29.14	1.09	0.66	24.03	10.95	3.05
800	21.25	25.08	19.72	29.75	1.09	0.65	23.90	10.68	3.01
850	21.14	25.03	19.44	29.55	1.10	0.64	23.88	10.84	3.01
900	21.01	25.04	19.35	29.85	1.10	0.63	24.02	10.73	3.10
940	20.93	24.97	19.25	29.47	1.10	0.63	24.20	10.47	3.13
1000	20.77	24.96	19.05	29.79	1.11	0.62	24.02	10.59	3.03
1100	20.57	24.91	18.82	29.58	1.12	0.61	23.90	10.72	3.13
1200	20.32	24.85	18.50	29.43	1.13	0.60	23.88	10.68	3.07
1300	20.08	24.85	18.38	28.93	1.14	0.58	24.01	10.61	3.17
1400	19.86	24.79	18.09	28.52	1.15	0.57	23.74	10.74	3.18
1500	19.62	24.71	17.77	28.08	1.16	0.56	23.87	10.41	3.23
1600	19.39	24.71	17.39	26.95	1.18	0.55	24.42	10.53	3.22
1700	19.14	24.62	17.14	26.89	1.19	0.54	24.97	10.39	3.22
1800	18.93	24.63	17.08	26.26	1.21	0.52	24.72	10.59	3.24
1900	18.69	24.54	16.74	25.62	1.22	0.52	24.04	10.52	3.23
2000	18.47	24.52	16.41	25.16	1.23	0.50	24.17	10.38	3.22
2100	18.23	24.48	16.25	24.57	1.25	0.49	23.69	10.55	3.24
2200	18.01	24.48	15.95	23.90	1.27	0.48	23.85	10.10	3.19
2300	17.78	24.45	15.70	23.21	1.28	0.47	23.57	10.15	3.23
2400	17.57	24.42	15.53	22.80	1.30	0.46	23.40	9.81	3.31
2500	17.37	24.40	15.18	22.23	1.32	0.46	23.26	9.95	3.22
2600	17.14	24.40	14.94	21.73	1.34	0.45	22.85	9.76	3.29
2700	16.94	24.35	14.95	21.52	1.35	0.44	22.81	9.55	3.29
2800	16.72	24.38	14.72	20.87	1.38	0.43	22.59	9.40	3.29
2900	16.54	24.37	14.46	20.51	1.40	0.42	22.37	9.26	3.30
3000	16.34	24.35	14.39	20.13	1.42	0.41	22.28	9.07	3.23

REV. X1

GALI-3+

070822

Page 8 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 42mA, Vd = 3.45V @Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	23.23	26.08	31.52	41.35	1.05	0.72	29.63	13.78	3.06
100	23.23	26.17	28.67	36.33	1.06	0.71	29.88	13.89	3.22
150	23.14	25.97	29.89	36.54	1.05	0.72	30.59	13.89	3.10
200	23.10	26.04	28.96	35.44	1.06	0.71	29.91	13.85	2.94
250	23.05	26.08	28.23	34.90	1.06	0.70	28.55	13.89	3.09
300	22.96	25.90	27.73	35.00	1.06	0.71	29.37	13.67	3.32
350	22.88	25.95	27.25	34.09	1.06	0.70	29.01	13.64	3.22
400	22.78	25.90	26.72	34.42	1.06	0.70	28.65	13.57	3.06
450	22.66	25.97	26.26	33.59	1.07	0.68	28.25	13.49	3.12
500	22.56	25.85	25.46	33.30	1.07	0.68	28.22	13.46	3.30
550	22.45	25.84	25.01	32.49	1.07	0.68	27.98	13.49	3.24
600	22.36	25.77	24.55	31.72	1.07	0.67	27.74	13.52	3.05
650	22.24	25.80	24.16	30.96	1.08	0.66	27.55	13.39	3.11
700	22.12	25.67	23.67	30.06	1.08	0.66	27.79	13.41	3.18
750	22.01	25.71	23.47	29.11	1.09	0.65	27.64	13.15	3.17
800	21.90	25.71	23.10	28.85	1.09	0.64	27.34	13.12	3.08
850	21.77	25.64	22.53	28.94	1.09	0.64	27.25	12.99	3.06
900	21.64	25.62	22.25	28.76	1.10	0.63	27.26	12.89	3.25
940	21.54	25.53	21.97	28.55	1.10	0.63	27.16	12.82	3.25
1000	21.39	25.50	21.53	28.05	1.10	0.62	26.89	12.86	3.09
1100	21.16	25.46	21.02	27.57	1.11	0.61	26.63	12.62	3.27
1200	20.89	25.42	20.49	27.45	1.13	0.59	26.37	12.64	3.15
1300	20.65	25.34	20.17	26.82	1.14	0.58	26.19	12.66	3.30
1400	20.41	25.26	19.88	26.42	1.14	0.57	25.91	12.74	3.27
1500	20.16	25.21	19.47	26.55	1.16	0.56	25.99	12.38	3.36
1600	19.91	25.09	18.95	26.15	1.16	0.55	26.09	12.29	3.34
1700	19.65	25.12	18.58	26.20	1.19	0.53	25.99	12.10	3.32
1800	19.43	25.02	18.47	25.99	1.20	0.52	25.37	12.18	3.37
1900	19.19	24.94	18.11	25.92	1.21	0.51	25.00	12.15	3.35
2000	18.96	24.92	17.77	25.95	1.22	0.50	24.88	12.01	3.37
2100	18.71	24.90	17.56	25.34	1.24	0.49	24.36	12.19	3.34
2200	18.49	24.84	17.19	25.09	1.26	0.48	24.43	11.81	3.34
2300	18.25	24.79	16.90	24.48	1.27	0.47	23.97	11.68	3.34
2400	18.02	24.80	16.68	24.12	1.29	0.46	23.73	11.30	3.45
2500	17.82	24.71	16.31	23.80	1.30	0.46	23.44	11.21	3.33
2600	17.59	24.66	16.01	23.30	1.32	0.45	22.99	10.87	3.44
2700	17.39	24.60	15.99	23.19	1.34	0.44	22.91	10.56	3.41
2800	17.17	24.62	15.69	22.46	1.36	0.43	22.62	10.38	3.46
2900	16.98	24.57	15.46	22.05	1.37	0.43	22.52	10.27	3.40
3000	16.78	24.55	15.33	21.67	1.39	0.42	22.23	10.02	3.40

REV. X1

GALI-3+

070822

Page 9 of 11



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Curves


GAIN vs. TEMPERATURE

INPUT POWER = -25dBm, CURRENT = 35mA

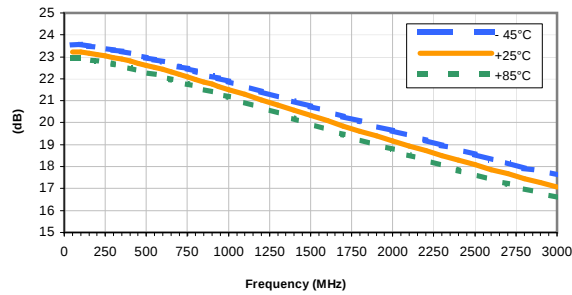


GAIN vs. CURRENT

INPUT POWER = -25dBm, Temperature = +25°C

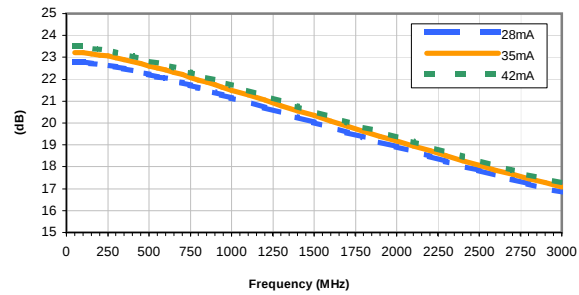


ISOLATION vs. TEMPERATURE

INPUT POWER = -25dBm, CURRENT = 35mA

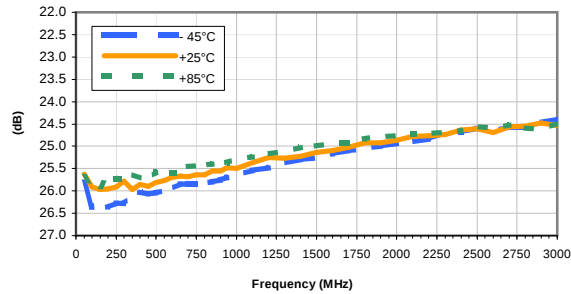


ISOLATION vs. CURRENT

INPUT POWER = -25dBm, Temperature = +25°C

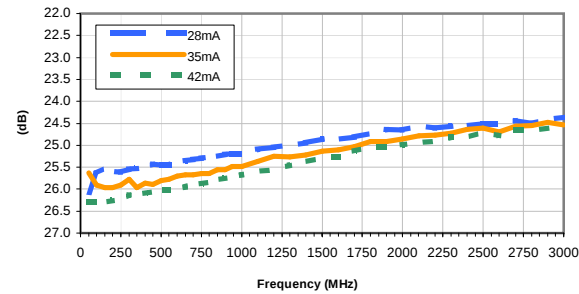


INPUT RETURN LOSS vs. TEMPERATURE

INPUT POWER = -25dBm, CURRENT = 35mA

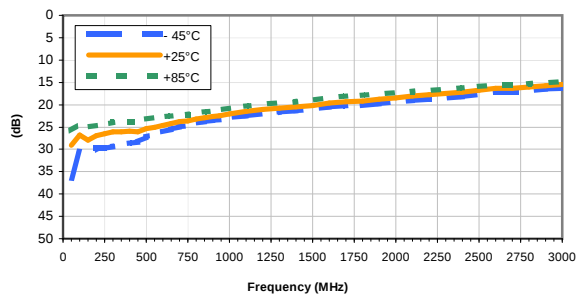


INPUT RETURN LOSS vs. CURRENT

INPUT POWER = -25dBm, Temperature = +25°C

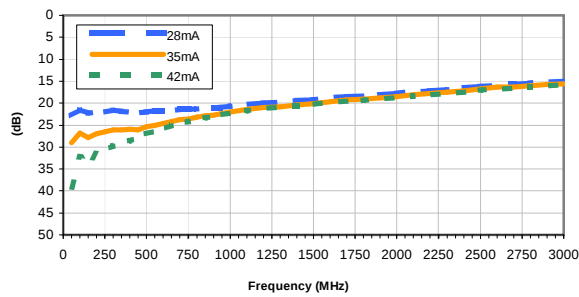


OUTPUT RETURN LOSS vs. TEMPERATURE

INPUT POWER = -25dBm, CURRENT = 35mA

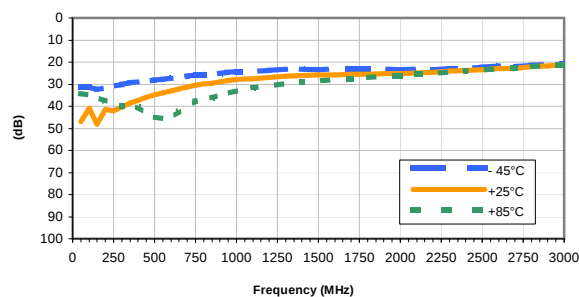

OUTPUT RETURN LOSS vs. CURRENT


INPUT POWER = -25dBm, Temperature = +25°C

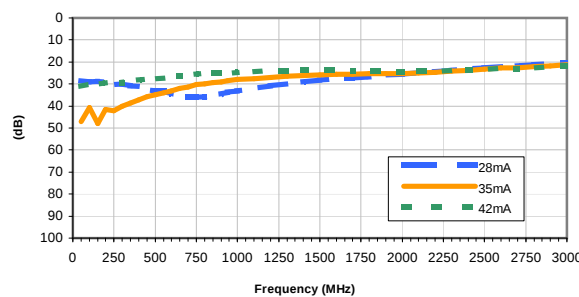

Typical Performance Curves


OUTPUT IP3 vs. TEMPERATURE

INPUT POWER = -25dBm, CURRENT = 35mA

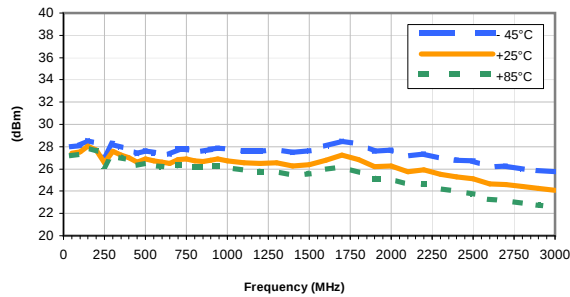


OUTPUT IP3 vs. CURRENT

INPUT POWER = -25dBm, Temperature = +25°C

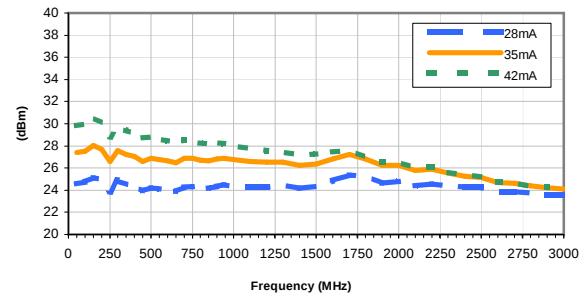


OUTPUT POWER at 1dB Compression vs. TEMPERATURE

CURRENT = 35mA

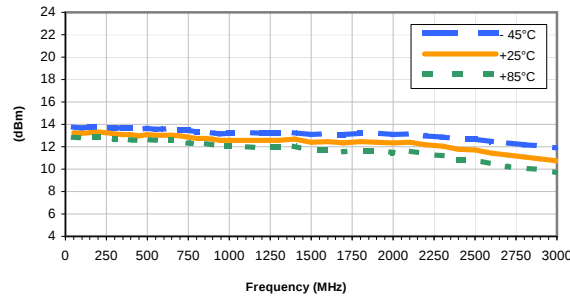


OUTPUT POWER at 1dB Compression vs. CURRENT

Temperature = +25°C

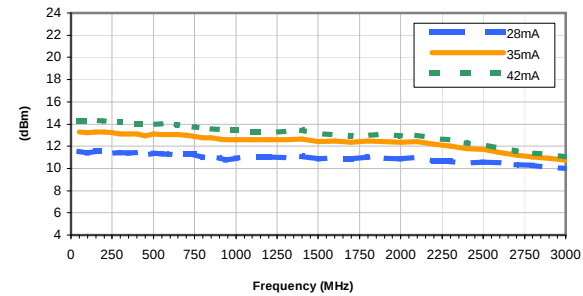


Noise Figure vs. TEMPERATURE

CURRENT = 35mA

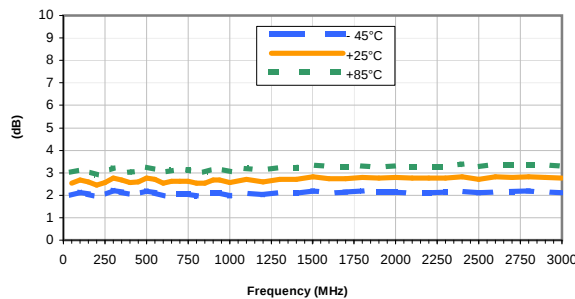

Noise Figure vs. CURRENT


Temperature = +25°C

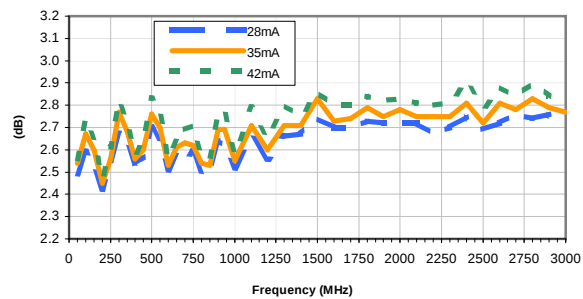

Typical Performance Curves


GAIN vs. TEMPERATURE

INPUT POWER = -25dBm, CURRENT = 35mA

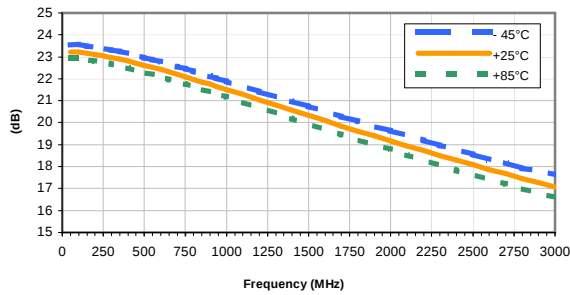


GAIN vs. CURRENT

INPUT POWER = -25dBm, Temperature = +25°C

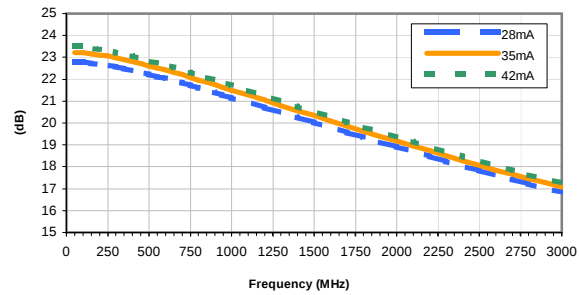


ISOLATION vs. TEMPERATURE

INPUT POWER = -25dBm, CURRENT = 35mA

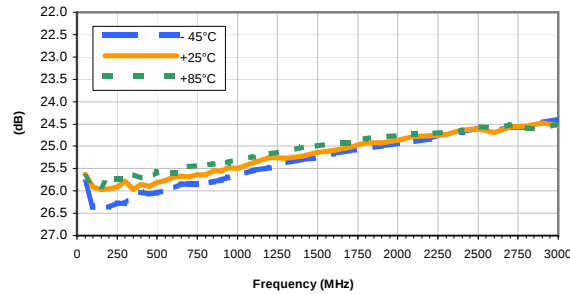


ISOLATION vs. CURRENT

INPUT POWER = -25dBm, Temperature = +25°C

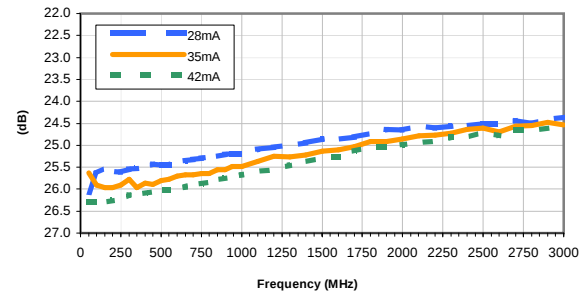


INPUT RETURN LOSS vs. TEMPERATURE

INPUT POWER = -25dBm, CURRENT = 35mA

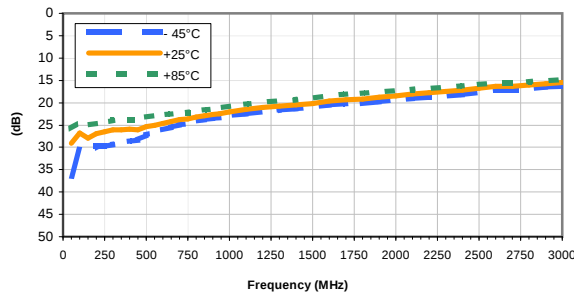


INPUT RETURN LOSS vs. CURRENT

INPUT POWER = -25dBm, Temperature = +25°C

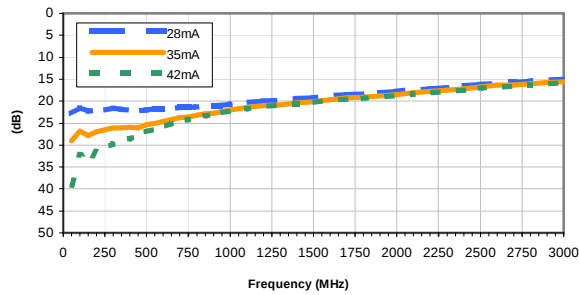


OUTPUT RETURN LOSS vs. TEMPERATURE

INPUT POWER = -25dBm, CURRENT = 35mA

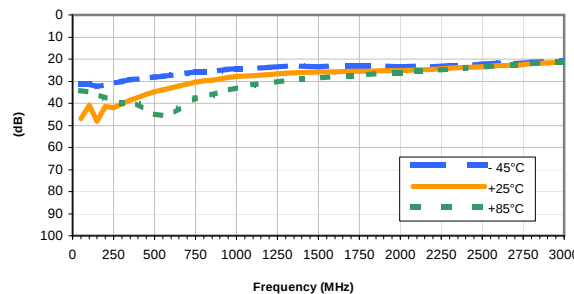

OUTPUT RETURN LOSS vs. CURRENT


INPUT POWER = -25dBm, Temperature = +25°C

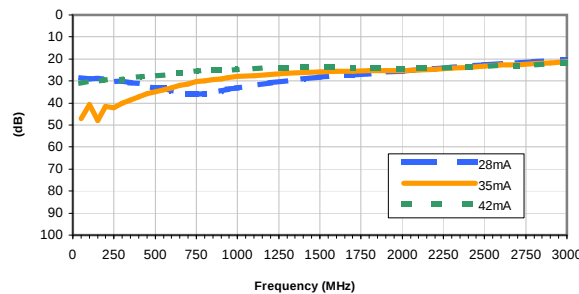

Typical Performance Curves


OUTPUT IP3 vs. TEMPERATURE

INPUT POWER = -25dBm, CURRENT = 35mA

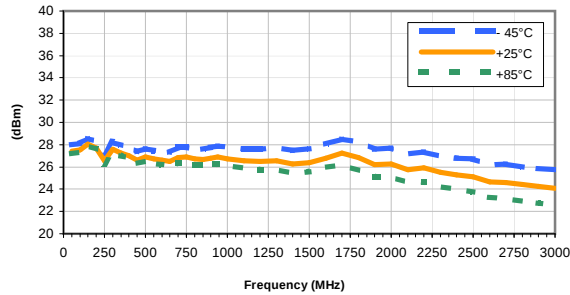


OUTPUT IP3 vs. CURRENT

INPUT POWER = -25dBm, Temperature = +25°C

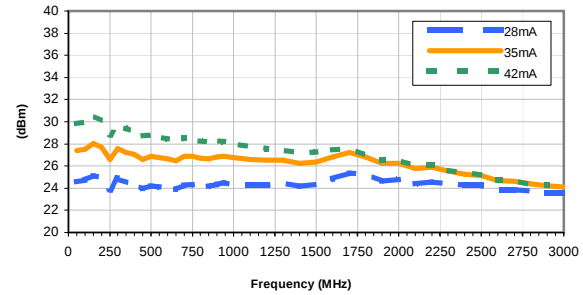


OUTPUT POWER at 1dB Compression vs. TEMPERATURE

CURRENT = 35mA

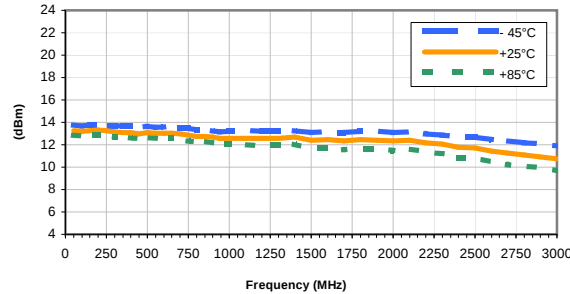


OUTPUT POWER at 1dB Compression vs. CURRENT

Temperature = +25°C

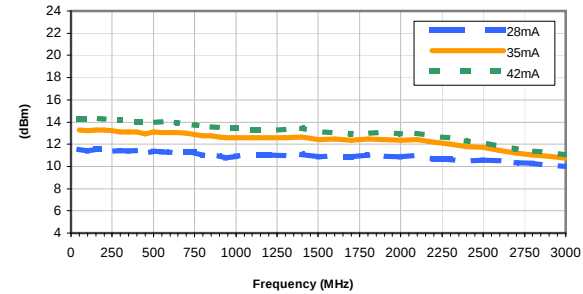


Noise Figure vs. TEMPERATURE

CURRENT = 35mA

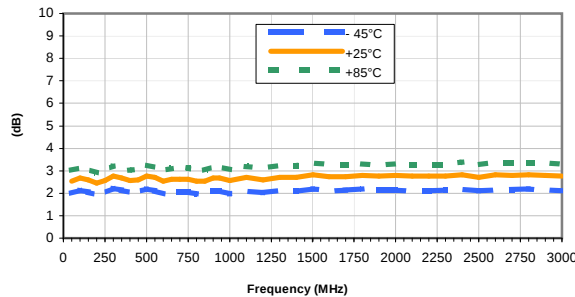


Noise Figure vs. CURRENT


Temperature = +25°C

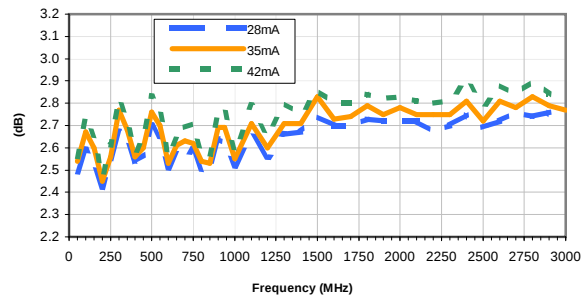

Outline Dimensions

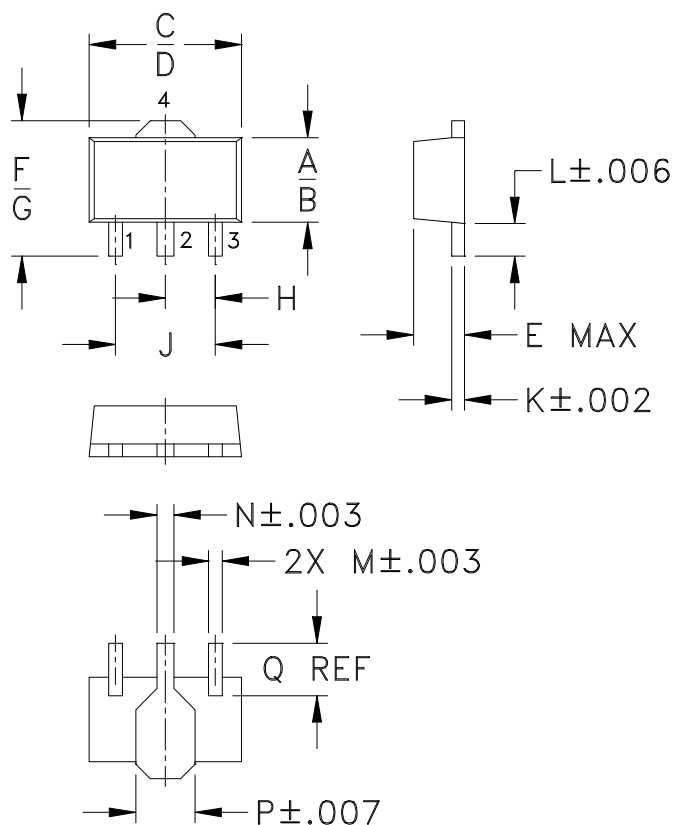

PCB Land Pattern

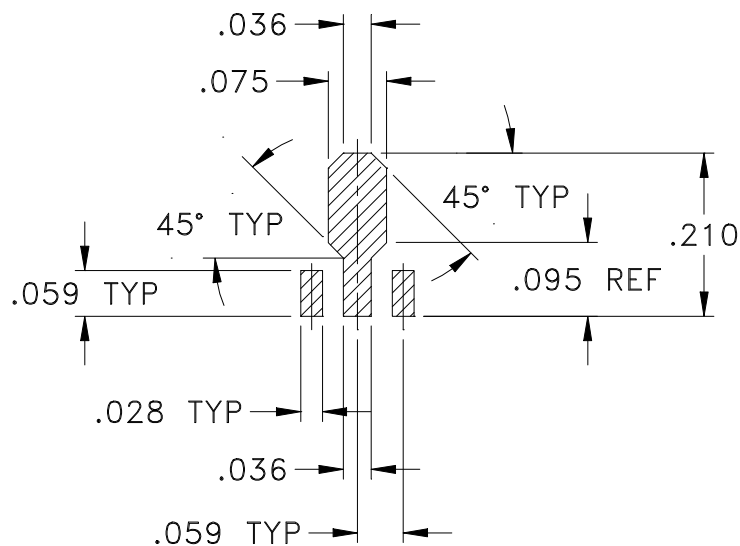

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
DF782	.102 (2.59)	.090 (2.29)	.181 (4.60)	.173 (4.39)	.063 (1.60)	.167 (4.24)	.155 (3.94)	.059 (1.50)	.118 (3.00)	.015 (0.38)	.041 (1.04)	.016 (0.41)

CASE #	N	P	Q	WT. GRAM
DF782	.019 (0.48)	.065 (1.65)	.062 (1.57)	.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin.
All models, (+) suffix. See model Data sheet.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



INTERNET <http://www.minicircuits.com>


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F55

DEVICE ORIENTATION IN T&R

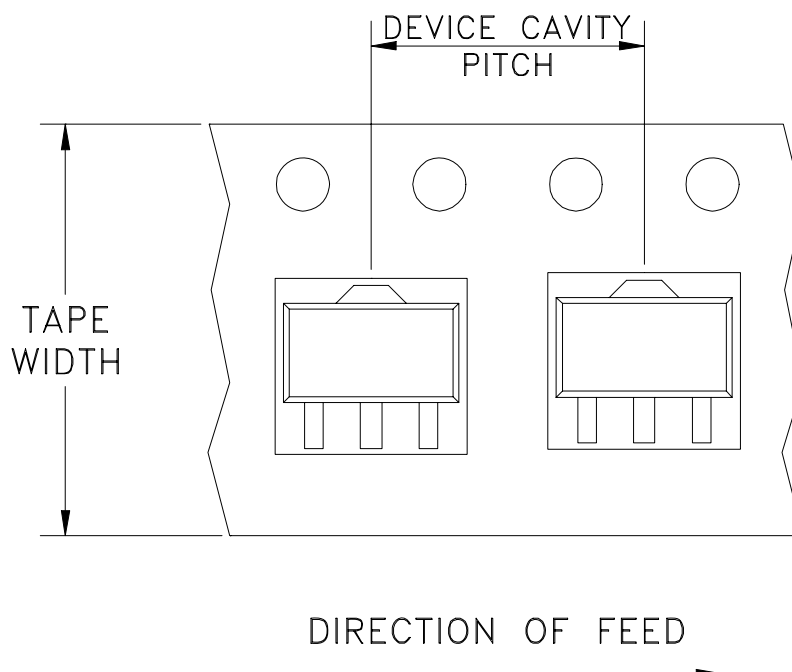

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
12	8	7	Small quantity standard (see note)	20
				50
				100
				200
				500
			Standard	1000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M76190	CHANGED DISCRIPTION	04/01	GF	CT
B	M82575	UPDATED DRAWING	08/05/02	AV	LC
C	M102713	ADDED NOTE 2 & "...WITH SMOBC"	01/17/06	MMG	IL
D	M108434	UPDATED DRAWING PER TB-409+	11/14/06	PW	IG

Technical drawing of a microelectronic package showing top and side views with dimensions and labels.

Top View Dimensions:

- Overall width: .240
- Overall height: .139
- Distance from top edge to center of top pins: .124
- Distance from center of top pins to center of bottom pins: .074
- Distance from center of bottom pins to bottom edge: .024
- Distance from left edge to center of left pins: .036
- Distance from center of left pins to center of top pins: .100
- Distance from center of top pins to center of right pins: .075
- Distance from center of right pins to right edge: .036
- Distance from left edge to center of left pins: .036
- Distance from center of left pins to center of top pins: .100
- Distance from center of top pins to center of right pins: .075
- Distance from center of right pins to right edge: .036
- Distance from left edge to center of left pins: .036
- Distance from center of left pins to center of top pins: .100
- Distance from center of top pins to center of right pins: .075
- Distance from center of right pins to right edge: .036

Side View Dimensions:

- Overall height: .139
- Distance from top edge to center of top pins: .124
- Distance from center of top pins to center of bottom pins: .074
- Distance from center of bottom pins to bottom edge: .024
- Distance from left edge to center of left pins: .036
- Distance from center of left pins to center of top pins: .100
- Distance from center of top pins to center of right pins: .075
- Distance from center of right pins to right edge: .036
- Distance from left edge to center of left pins: .036
- Distance from center of left pins to center of top pins: .100
- Distance from center of top pins to center of right pins: .075
- Distance from center of right pins to right edge: .036

Labels:

- 8X ϕ .020 PTH FOR GROUND
- 45° TYP
- .096 TYP
- .020 TYP
- WIDTH, 2 PL. (SEE NOTE BELOW)
- PIN 1
- .020
- .028 TYP
- .027 TYP
- .040
- .036
- .072
- .059 TYP
- PACKAGE OUTLINE

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE
DIMENSIONS ARE IN INCHES	DRAWN	AV	01/15/01
TOLERANCES ON:	CHECKED	YB	01/23/01
2 PL DECIMALS ±	APPROVED	DB	01/23/01
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			




Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL, mz, DF782, GALI, TB-409-XXX+


THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-019		REV: D
FILE: 98PL019		SCALE: 10:1	SHEET: 1 OF 1	

Evaluation Board and Circuit

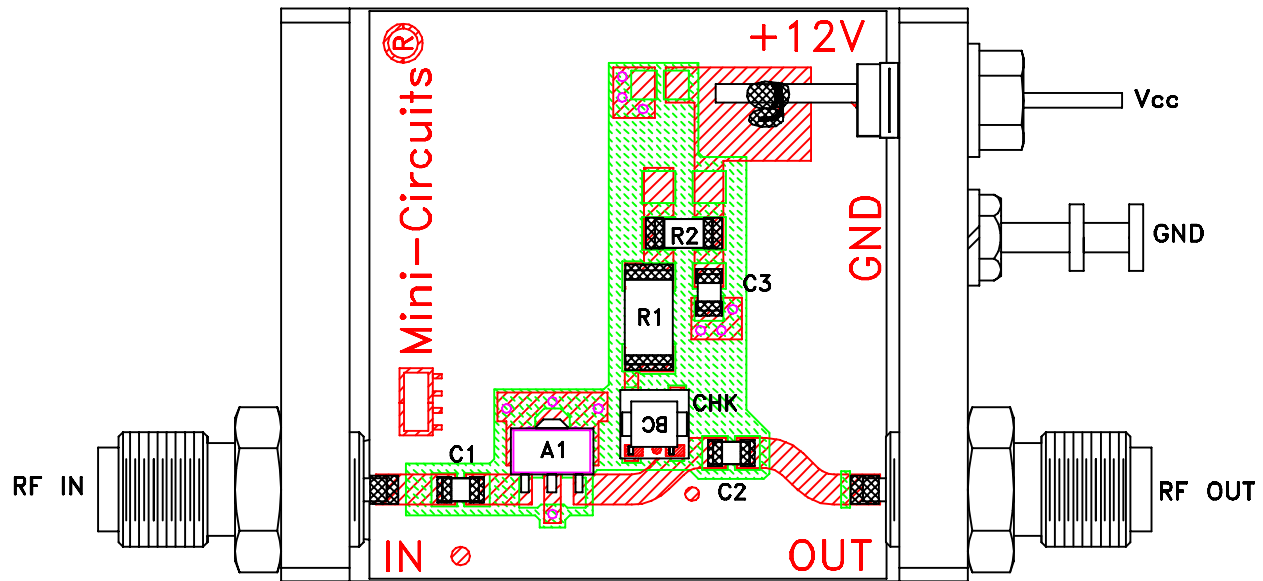

TB-409-3+

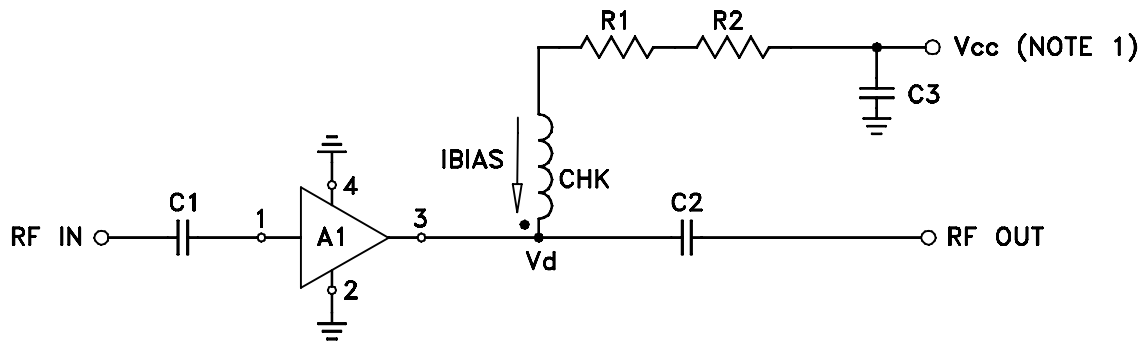

COMPONENT	VALUE
A1	Gali-3(+)
C1 (NOTE 4)	2400 pF
C2 (NOTE 4)	2400 pF
C3 (bypass)	0.1 uF
R1	249 Ohms, 0.75W
R2	0 Ohm, 0.25W
CHK	Mini-Circuits TCCH-80+

Schematic Diagram

NOTE:

1. Vcc voltage: $+12 \pm 0.2V$.
2. SMA Female connectors.
3. PCB material: Rogers RO4350 or equivalent, dielectric constant=3.5, dielectric thickness=.030 inch.
4. Capacitors, C1 & C2 should be free of resonance up to the highest frequency specified.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-45° to 85°C or -40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-65° to 150° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Mechanical Shock	1.5Kg, 0.5 ms, 5 shock pulses, Y1 direction only	MIL-STD-883, Method 2002, Condition B, except Y1 direction only
Vibration (Variable Frequency)	50g peak	MIL-STD-883, Method 2007, Condition B
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102, Condition C
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 260°C peak	J-STD-020
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether +	MIL-STD-202, Method 215



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
	monoethanolamine at 63°C to 70°C	