

# Low Pass Filter

50Ω

DC<sup>(1)</sup> to 105 MHz

Generic photo used for illustration purposes only

CASE STYLE F·FV1206

### Maximum Ratings



|                       |                   |
|-----------------------|-------------------|
| Operating Temperature | -55°C to 100°C    |
| Storage Temperature   | -55°C to 100°C    |
| RF Power Input*       | 8.5W max. at 25°C |

\* Passband rating, derate linearly to 3.5W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

## Pin Connections

|        |     |
|--------|-----|
| RF IN  | 1   |
| RF OUT | 3   |
| GROUND | 2,4 |

## Outline Drawing




Suggested Layout,  
Tolerance to be within  $\pm .002$

### Outline Dimensions (inch)

|      |      |      |      |      |      |      |       |
|------|------|------|------|------|------|------|-------|
| A    | B    | C    | D    | E    | F    | G    |       |
| .126 | .063 | .037 | .020 | .032 | .009 | .169 |       |
| 3.20 | 1.60 | 0.94 | 0.51 | 0.81 | 0.23 | 4.29 |       |
| H    | J    | K    | L    | M    | N    | P    | wt    |
| .087 | .024 | .122 | .024 | .087 | .012 | .071 | grams |
| 2.21 | 0.61 | 3.10 | 0.61 | 2.21 | 0.30 | 1.80 | .020  |

**Demo Board MCL P/N: TB-270**  
**Suggested PCB Layout (PL-137)**

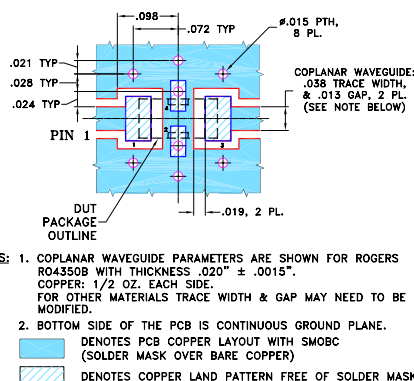

**NOTES:** 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020"  $\pm$  .0015".  
COPPER: 1/2 OZ. EACH SIDE.  
FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH  
 (SOLDER MASK) ON BOTH SIDES OF PCB

 (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- excellent power handling, 8.5W
- small size
- 7 sections
- temperature stable
- LTCC construction
- protected by U.S. Patent 6,943,646

## Applications

- harmonic rejection
- VHF/UHF transmitters/receivers
- RF suppression for DC lines on PCB
- anti-aliasing for A/D converter


### Electrical Specifications<sup>(1,2)</sup> at 25°C

| Parameter |                | F#    | Frequency (MHz) | Min.     | Typ. | Max. | Unit |
|-----------|----------------|-------|-----------------|----------|------|------|------|
| Pass Band | Insertion Loss | DC-F1 | DC-105          | —        | —    | 1.0  | dB   |
|           | Freq. Cut-Off  | F2    | 180             | —        | 3.0  | —    | dB   |
|           | VSWR           | DC-F1 | DC-105          | —        | 1.2  | —    | :1   |
| Stop Band | Rejection Loss | F3    | 250             | 20       | —    | —    | dB   |
|           |                | F4-F5 | 265-1650        | —        | 40   | —    | dB   |
|           |                | F6    | 4750            | —        | 20   | —    | dB   |
|           |                | VSWR  | F3-F6           | 250-4750 | —    | 20   | —    |
|           |                |       |                 |          |      |      |      |


(1) In Application where DC voltage is present at either input or output ports, coupling capacitors are required.

(2) Measured on Mini-Circuits Characterization Test Board TB-270.

### Typical Frequency Response





### Electrical Schematic



### Typical Performance Data at 25°C

| Frequency<br>(MHz) | Insertion Loss<br>(dB) | VSWR<br>(:1) |
|--------------------|------------------------|--------------|
| 1.00               | 0.17                   | 1.04         |
| 50.00              | 0.44                   | 1.08         |
| 100.00             | 0.73                   | 1.08         |
| 105.00             | 0.78                   | 1.09         |
| 125.00             | 0.98                   | 1.16         |
| 180.00             | 3.08                   | 1.92         |
| 215.00             | 10.55                  | 2.88         |
| 250.00             | 31.43                  | 4.46         |
| 265.00             | 45.61                  | 5.31         |
| 700.00             | 46.98                  | 56.04        |
| 1000.00            | 55.37                  | 78.97        |
| 1650.00            | 51.39                  | 78.97        |
| 2000.00            | 43.21                  | 82.73        |
| 3000.00            | 31.32                  | 21.73        |
| 4750.00            | 25.73                  | 56.04        |

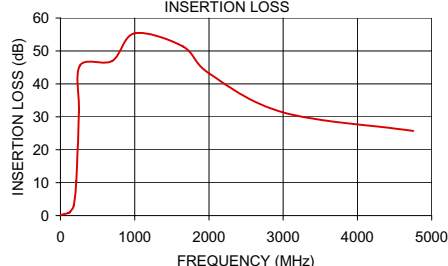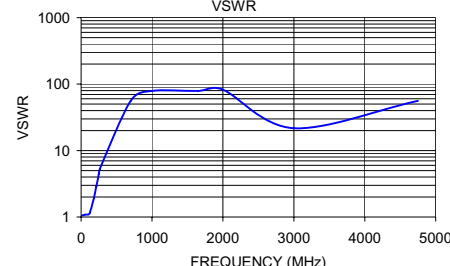LFCN-105  
INSERTION LOSSLFCN-105  
VSWR

## Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCJ/Store/terms](http://www.minicircuits.com/MCJ/Store/terms).

REV. K  
ECO-006038  
LFCN-105  
ED-11690/3  
RVN/AD/CP/AM  
210202

# Ceramic Low Pass Filter

LFCN-105

## Typical Performance Data

| FREQ.<br>(MHz) | INSERTION LOSS<br>(dB) |          |           | INPUT RETURN LOSS<br>(dB) |          |           | OUTPUT RETURNLOSS<br>(dB) |          |           |
|----------------|------------------------|----------|-----------|---------------------------|----------|-----------|---------------------------|----------|-----------|
|                | @ -55° C               | @ +25° C | @ +100° C | @ -55° C                  | @ +25° C | @ +100° C | @ -55° C                  | @ +25° C | @ +100° C |
| 1              | 0.13                   | 0.17     | 0.36      | 35.11                     | 34.14    | 33.01     | 35.16                     | 34.14    | 33.91     |
| 20             | 0.27                   | 0.31     | 0.37      | 27.62                     | 26.18    | 25.04     | 26.24                     | 25.26    | 24.35     |
| 30             | 0.31                   | 0.35     | 0.42      | 29.62                     | 27.41    | 25.81     | 27.47                     | 26.17    | 25.04     |
| 40             | 0.35                   | 0.39     | 0.46      | 30.55                     | 28.14    | 26.34     | 28.06                     | 26.72    | 25.51     |
| 50             | 0.39                   | 0.44     | 0.51      | 30.60                     | 28.39    | 26.58     | 27.31                     | 26.15    | 25.08     |
| 60             | 0.43                   | 0.49     | 0.56      | 30.46                     | 28.50    | 26.68     | 26.72                     | 25.77    | 24.82     |
| 70             | 0.48                   | 0.54     | 0.61      | 30.43                     | 28.64    | 26.82     | 26.19                     | 25.40    | 24.57     |
| 80             | 0.53                   | 0.60     | 0.67      | 30.46                     | 28.60    | 26.79     | 25.95                     | 25.20    | 24.42     |
| 90             | 0.59                   | 0.66     | 0.74      | 30.63                     | 28.49    | 26.72     | 25.82                     | 25.00    | 24.23     |
| 100            | 0.65                   | 0.73     | 0.82      | 30.00                     | 27.80    | 26.23     | 25.62                     | 24.67    | 23.90     |
| 105            | 0.70                   | 0.78     | 0.87      | 29.11                     | 27.11    | 25.74     | 25.39                     | 24.40    | 23.65     |
| 125            | 0.89                   | 0.98     | 1.09      | 23.15                     | 22.54    | 22.11     | 22.38                     | 21.80    | 21.36     |
| 180            | 2.99                   | 3.08     | 3.22      | 9.45                      | 10.00    | 10.47     | 7.43                      | 7.72     | 7.96      |
| 195            | 5.11                   | 5.14     | 5.26      | 7.34                      | 7.95     | 8.49      | 4.53                      | 4.79     | 5.03      |
| 215            | 10.72                  | 10.55    | 10.58     | 5.69                      | 6.29     | 6.87      | 2.17                      | 2.37     | 2.56      |
| 225            | 15.21                  | 14.86    | 14.79     | 5.04                      | 5.61     | 6.17      | 1.59                      | 1.76     | 1.93      |
| 235            | 21.02                  | 20.44    | 20.21     | 4.38                      | 4.90     | 5.42      | 1.28                      | 1.43     | 1.57      |
| 250            | 32.43                  | 31.43    | 30.93     | 3.52                      | 3.96     | 4.40      | 1.07                      | 1.20     | 1.33      |
| 255            | 36.97                  | 35.88    | 35.31     | 3.29                      | 3.72     | 4.13      | 1.04                      | 1.16     | 1.28      |
| 265            | 45.79                  | 45.61    | 45.57     | 2.93                      | 3.31     | 3.69      | 0.98                      | 1.10     | 1.21      |
| 270            | 46.67                  | 47.83    | 49.04     | 2.78                      | 3.15     | 3.51      | 0.96                      | 1.07     | 1.19      |
| 300            | 37.31                  | 37.74    | 38.07     | 2.19                      | 2.49     | 2.77      | 0.87                      | 0.97     | 1.07      |
| 330            | 35.39                  | 35.50    | 35.63     | 1.78                      | 2.03     | 2.28      | 0.80                      | 0.90     | 1.00      |
| 400            | 42.63                  | 42.19    | 41.96     | 1.12                      | 1.27     | 1.44      | 0.67                      | 0.76     | 0.85      |
| 455            | 56.73                  | 57.30    | 56.82     | 0.78                      | 0.89     | 1.01      | 0.59                      | 0.67     | 0.75      |
| 500            | 46.66                  | 47.15    | 47.59     | 0.59                      | 0.68     | 0.78      | 0.54                      | 0.61     | 0.69      |
| 585            | 43.81                  | 43.86    | 44.03     | 0.40                      | 0.45     | 0.53      | 0.44                      | 0.51     | 0.58      |
| 700            | 47.23                  | 46.98    | 46.83     | 0.27                      | 0.31     | 0.36      | 0.35                      | 0.40     | 0.47      |
| 800            | 55.17                  | 54.28    | 53.51     | 0.23                      | 0.25     | 0.30      | 0.30                      | 0.35     | 0.42      |
| 890            | 68.27                  | 69.26    | 68.87     | 0.21                      | 0.23     | 0.27      | 0.26                      | 0.30     | 0.36      |
| 1000           | 54.45                  | 55.37    | 56.42     | 0.19                      | 0.22     | 0.25      | 0.22                      | 0.27     | 0.33      |
| 1650           | 49.30                  | 51.39    | 52.86     | 0.17                      | 0.22     | 0.28      | 0.25                      | 0.27     | 0.31      |
| 2000           | 42.90                  | 43.21    | 43.36     | 0.15                      | 0.21     | 0.30      | 0.17                      | 0.21     | 0.26      |
| 3000           | 31.00                  | 31.32    | 31.63     | 0.62                      | 0.80     | 0.84      | 0.21                      | 0.26     | 0.33      |
| 4750           | 25.08                  | 25.73    | 26.42     | 0.17                      | 0.31     | 0.54      | 1.23                      | 1.56     | 2.03      |
| 5000           | 24.40                  | 24.19    | 24.55     | 0.29                      | 0.43     | 0.64      | 1.02                      | 1.11     | 1.22      |
| 7000           | 18.55                  | 18.65    | 18.77     | 0.73                      | 0.79     | 0.90      | 1.22                      | 1.26     | 1.39      |
| 9000           | 23.40                  | 22.84    | 22.59     | 12.33                     | 10.12    | 8.61      | 2.18                      | 2.05     | 2.02      |
| 11000          | 25.51                  | 25.61    | 25.84     | 10.88                     | 12.43    | 14.31     | 6.26                      | 6.18     | 6.61      |
| 13000          | 21.99                  | 19.10    | 17.65     | 5.14                      | 5.09     | 5.43      | 13.40                     | 11.80    | 8.12      |
| 15000          | 12.05                  | 12.33    | 12.80     | 4.23                      | 3.78     | 3.99      | 2.35                      | 2.40     | 2.74      |

REV. X1

LFCN-105

070923

Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




# Ceramic Low Pass Filter


## Typical Performance Curves

LFCN-105


INSERTION LOSS vs. TEMPERATURE

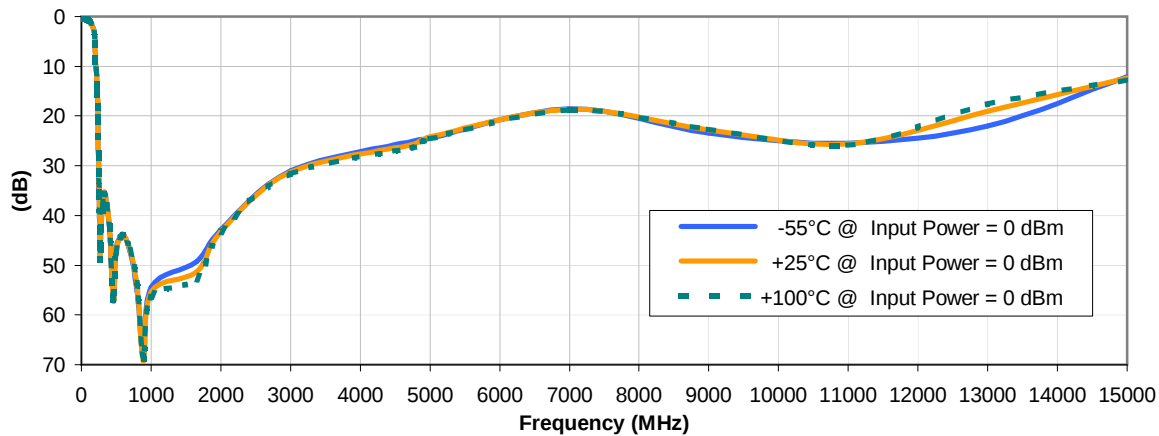

INPUT RETURN LOSS vs. TEMPERATURE

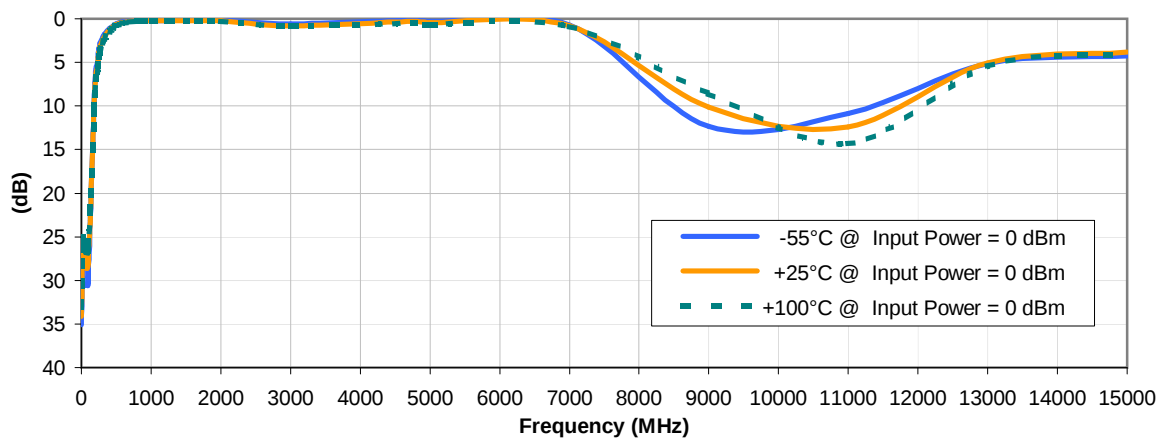

OUTPUT RETURN LOSS vs. TEMPERATURE

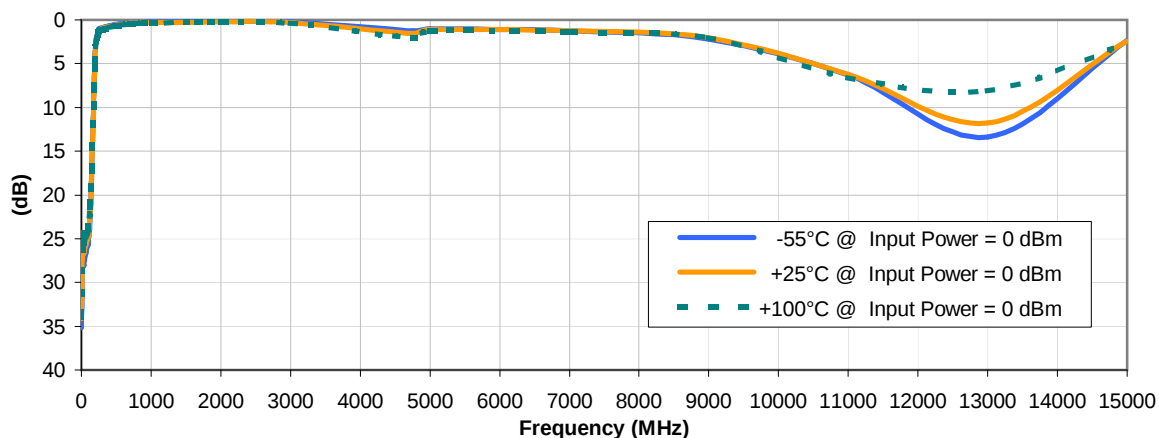

REV. X1  
LFCN-105  
070923  
Page 1 of 1

**Mini-Circuits®**


IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



### Outline Dimensions

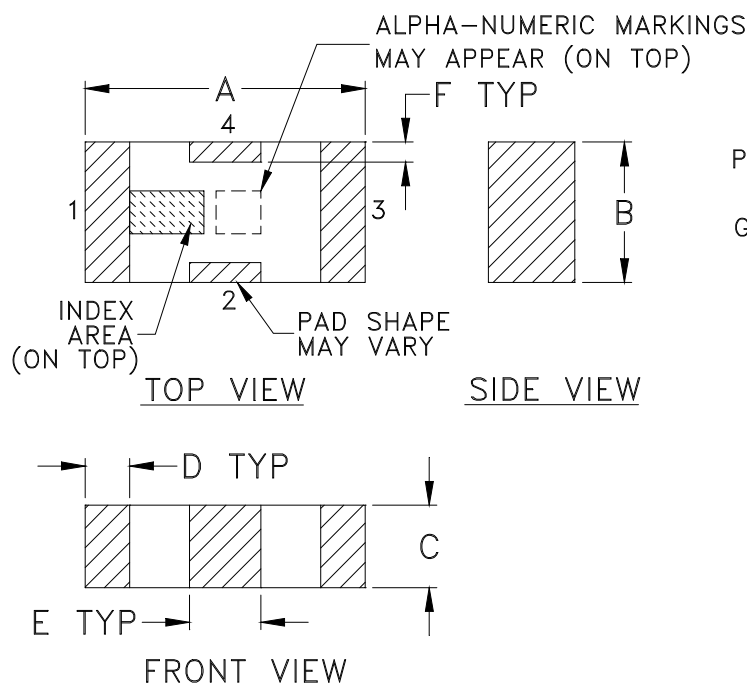

### PCB Land Pattern

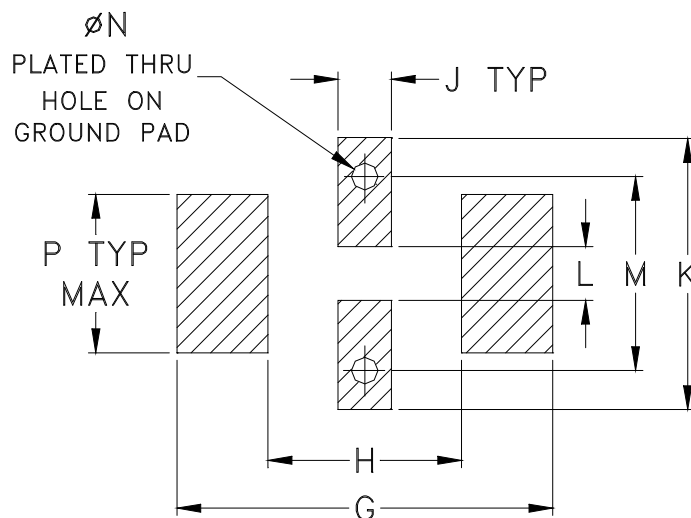

Suggested Layout,  
Tolerance to be within  $\pm .002$

| CASE # | A              | B              | C              | D              | E              | F              | G              | H              | J              | K              | L              | M              | N              | P              | WT. GRAM |
|--------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------|
| FV1206 | .126<br>(3.20) | .063<br>(1.60) | .037<br>(0.94) | .020<br>(0.51) | .032<br>(0.81) | .009<br>(0.23) | .169<br>(4.29) | .087<br>(2.21) | .024<br>(0.61) | .122<br>(3.10) | .024<br>(0.61) | .087<br>(2.21) | .012<br>(0.30) | .071<br>(1.80) | .020     |

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01$ ; 3 Pl.  $\pm .005$

#### Notes:

- Open style, ceramic base.
- Termination finish: **as shown below or indicated on Data Sheet.**  
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.  
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

# Tape & Reel Packaging TR-F71

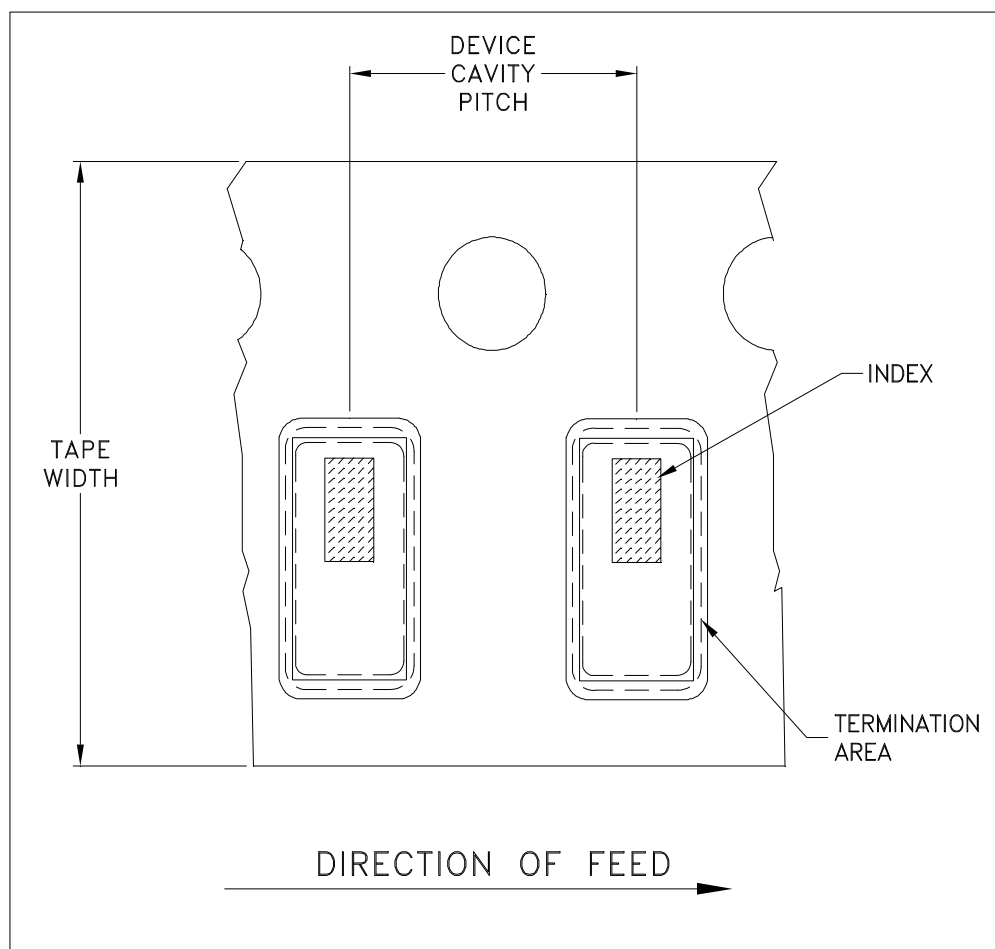


ILLUSTRATION 1

| Tape Width, mm | Device Cavity Pitch, mm | Reel Size, inches | Devices per Reel                    |      |
|----------------|-------------------------|-------------------|-------------------------------------|------|
| 8              | 4                       | 7                 | Small quantity standards (see note) | 20   |
|                |                         |                   |                                     | 50   |
|                |                         |                   |                                     | 100  |
|                |                         |                   |                                     | 200  |
|                |                         |                   |                                     | 500  |
|                |                         |                   |                                     | 1000 |
|                |                         |                   | Standard                            | 3000 |

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From Mini-Circuits At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS


## THIRD ANGLE PROJECTION



## REVISIONS

| REV | ECN No. | DESCRIPTION           | DATE     | DR  | AUTH |
|-----|---------|-----------------------|----------|-----|------|
| OR  | M88634  | NEW RELEASE           | 08/28/03 | GF  | ABD  |
| A   | M102713 | ADDED "...WITH SMOBC" | 01/17/06 | MMG | IL   |
|     |         |                       |          |     |      |
|     |         |                       |          |     |      |

SUGGESTED MOUNTING CONFIGURATION  
FOR FV1206 CASE STYLE, "nx" PIN CONNECTION

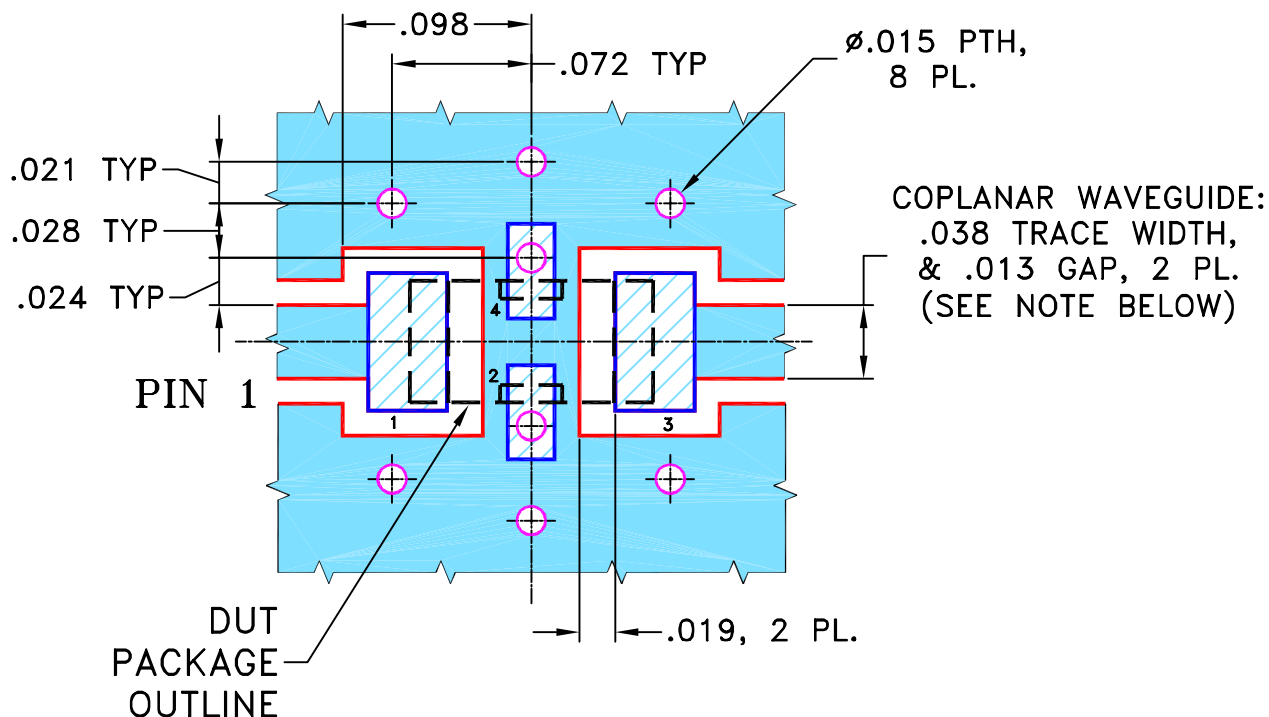


NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS R04350B WITH THICKNESS .020"  $\pm$  .0015".  
COPPER: 1/2 OZ. EACH SIDE.  
FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC  
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS  $\pm$ 3 PL DECIMALS  $\pm$  .005ANGLES  $\pm$ FRACTIONS  $\pm$ 

DRAWN

GF

08/27/03

CHECKED

AV

08/28/03

APPROVED

ABD

08/28/03



**Mini-Circuits®**

13 Neptune Avenue  
Brooklyn NY 11235

PL, nx, FV1206, LFCN/HFCN, TB-270

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-137

REV:

A

FILE:

98PL137

SCALE:

10:1

SHEET:



1 OF 1

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

# Evaluation Board and Circuit

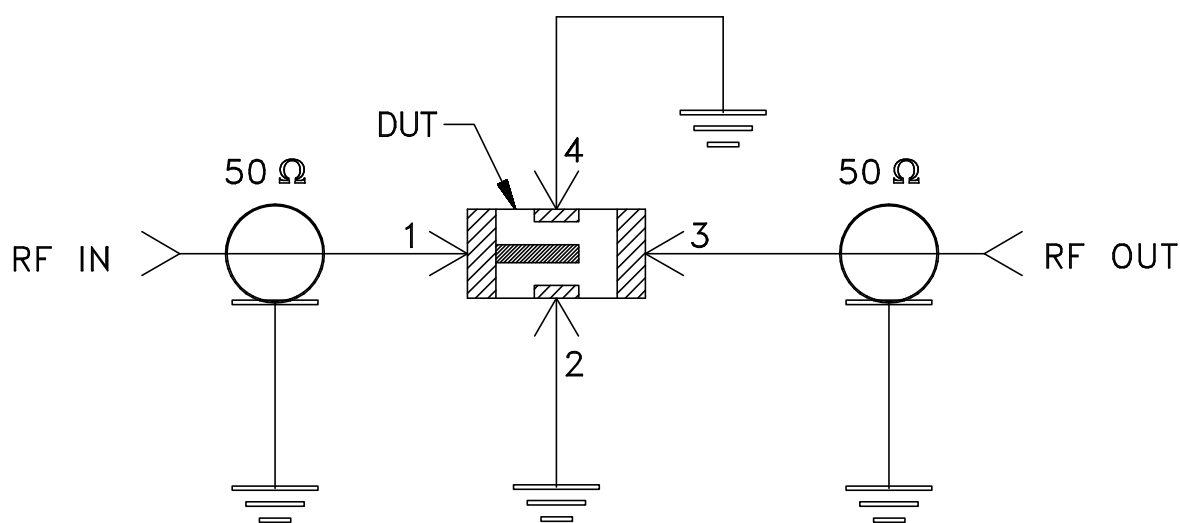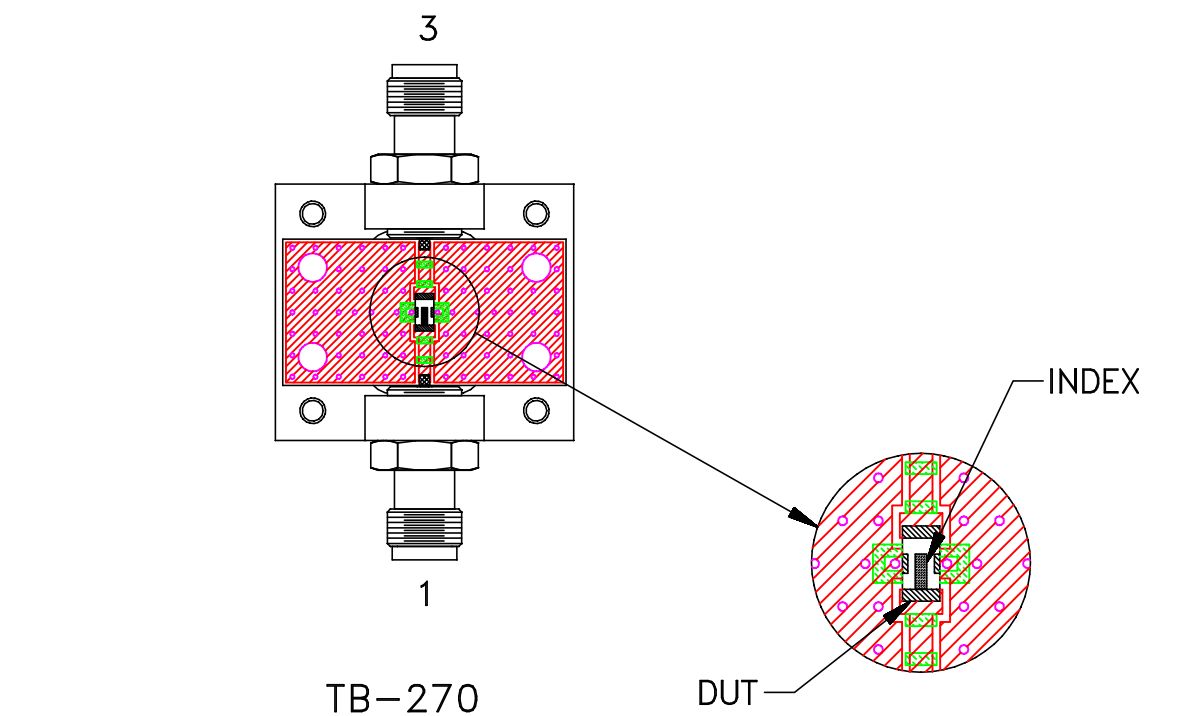

Schematic Diagram

## Notes:

1. SMA Female connectors.
2. PCB Material: ROGERS RO4350 or equivalent,  
Dielectric Constant=3.5, Thickness=.020 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification              | Test/Inspection Condition                                                           | Reference/Spec                                                                                       |
|----------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Operating Temperature      | -55° to 100°C<br>Ambient Environment                                                | Individual Model Data Sheet                                                                          |
| Storage Temperature        | -55° to 100° C<br>Ambient Environment                                               | Individual Model Data Sheet                                                                          |
| Humidity                   | 90 to 95% RH, 240 hours, 50°C                                                       | MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours |
| Solder Reflow Heat         | Sn-Pb Eutetic Process: 225°C peak<br>Pb-Free Process 245° - 250°C peak              | J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1                                                        |
| Solderability              | 10X Magnification                                                                   | J-STD-002, Para 4.2.5, Test S, 95% Coverage                                                          |
| Vibration (High Frequency) | 20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36) | MIL-STD-202, Method 204, Condition D                                                                 |
| Mechanical Shock           | 50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes                   | MIL-STD-202, Method 213, Condition A                                                                 |