

Power Splitter/Combiner

ADP-2-9+

2 Way-0° 50Ω 200 to 900 MHz



CASE STYLE: CD636

Maximum Ratings


| | |
|-----------------------------|----------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Power Input (as a splitter) | 0.5W max. |
| Internal Dissipation | 0.125W max. |

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

| | |
|---------------------------------------|-----|
| SUM PORT | 1 |
| PORT 1 | 3 |
| PORT 2 | 4 |
| GROUND | 6 |
| Externally connect together & isolate | 2,5 |

Outline Drawing



PCB Land Pattern




Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | | |
|------|------|------|------|------|------|------|-------|--|
| .272 | .310 | .220 | .100 | .162 | .055 | .100 | | |
| 6.91 | 7.87 | 5.59 | 2.54 | 4.11 | 1.40 | 2.54 | | |
| H | J | K | L | | | | wt | |
| .030 | .026 | .065 | .300 | | | | grams | |
| 0.76 | 0.66 | 1.65 | 7.62 | | | | 0.25 | |

Demo Board MCL P/N: TB-208 Suggested PCB Layout (PL-116)

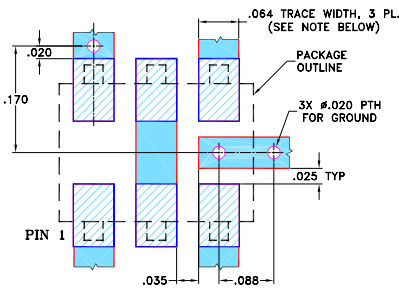

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low insertion loss, 0.4 dB typ.
- excellent amplitude unbalance, 0.05 dB typ.
- very good phase unbalance, 0.3 deg. typ.
- aqueous washable
- protected under U.S. Patent 6,133,525

Applications

- VHF/UHF receivers/transmitters
- cellular




Electrical Specifications

| FREQ. RANGE (MHz) | ISOLATION (dB) | | INSERTION LOSS (dB) ABOVE 3.0 dB | | PHASE UNBALANCE (Degrees) | AMPLITUDE UNBALANCE (dB) |
|-------------------|----------------|------|----------------------------------|------|---------------------------|--------------------------|
| | Typ. | Min. | Typ. | Max. | Max. | Max. |
| $f_L - f_U$ | | | | | | |
| 200-900 | 27 | 20 | 0.4 | 0.8 | 2.0 | 0.3 |

Typical Performance Data

| Frequency (MHz) | Total Loss ¹ (dB) | | Amplitude Unbalance (dB) | Isolation (dB) | Phase Unbalance (deg.) | VSWR S | VSWR 1 | VSWR 2 |
|-----------------|------------------------------|------|--------------------------|----------------|------------------------|--------|--------|--------|
| | S-1 | S-2 | | | | | | |
| 200.00 | 3.41 | 3.47 | 0.06 | 24.51 | 0.17 | 1.33 | 1.45 | 1.44 |
| 250.00 | 3.39 | 3.45 | 0.06 | 25.90 | 0.15 | 1.32 | 1.40 | 1.40 |
| 300.00 | 3.40 | 3.46 | 0.06 | 26.80 | 0.16 | 1.32 | 1.37 | 1.37 |
| 350.00 | 3.38 | 3.43 | 0.06 | 27.21 | 0.17 | 1.32 | 1.36 | 1.36 |
| 400.00 | 3.40 | 3.45 | 0.06 | 27.36 | 0.16 | 1.33 | 1.35 | 1.35 |
| 450.00 | 3.38 | 3.43 | 0.05 | 27.25 | 0.17 | 1.33 | 1.34 | 1.34 |
| 505.00 | 3.39 | 3.44 | 0.05 | 27.04 | 0.18 | 1.34 | 1.34 | 1.33 |
| 585.00 | 3.40 | 3.45 | 0.05 | 26.73 | 0.23 | 1.34 | 1.33 | 1.32 |
| 625.00 | 3.40 | 3.45 | 0.05 | 26.56 | 0.20 | 1.33 | 1.33 | 1.32 |
| 705.00 | 3.41 | 3.44 | 0.03 | 26.29 | 0.24 | 1.31 | 1.31 | 1.30 |
| 745.00 | 3.39 | 3.43 | 0.04 | 26.15 | 0.23 | 1.30 | 1.30 | 1.29 |
| 785.00 | 3.41 | 3.44 | 0.03 | 26.03 | 0.23 | 1.28 | 1.29 | 1.28 |
| 825.00 | 3.40 | 3.43 | 0.03 | 25.85 | 0.26 | 1.25 | 1.28 | 1.27 |
| 880.00 | 3.42 | 3.44 | 0.02 | 25.46 | 0.22 | 1.22 | 1.25 | 1.24 |
| 920.00 | 3.42 | 3.43 | 0.01 | 25.01 | 0.21 | 1.19 | 1.23 | 1.22 |

1. Total Loss = Insertion Loss + 3dB splitter loss.

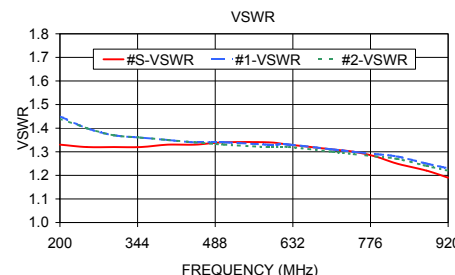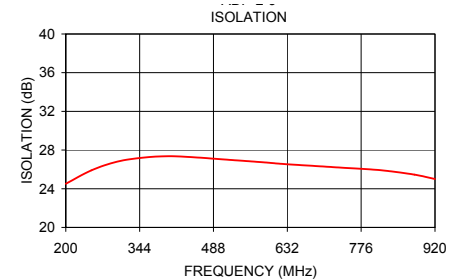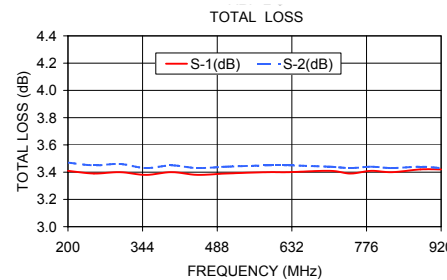

electrical schematic

