



Mini-Circuits

LUMPED LC SURFACE MOUNT

## Bandpass Filter

BPF-BV440+

50Ω

410 to 470 MHz

## KEY FEATURES

- Low Insertion Loss, 1.9 dB Typ.
- High Rejection, 62 dB Typ.
- Wide Stopband Rejection, Up to 3 GHz
- Miniature Shielded Package



Generic photo used for illustration purposes only


## APPLICATIONS

- Train Communication
- Telecom

## PRODUCT OVERVIEW

Mini-Circuits' Model BPF-BV440+ is a Lumped LC filter that offer a good insertion loss and high rejection. This bandpass filter covers from 410 to 470 MHz. This filter has high Q capacitors and inductors to achieve a low insertion loss. It has repeatable performance across production lots.

## FUNCTIONAL DIAGRAM

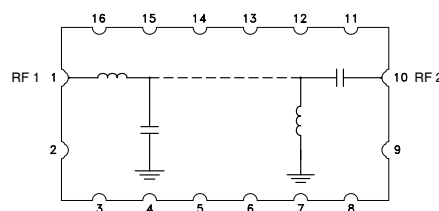ELECTRICAL SPECIFICATIONS<sup>1,2,3</sup> AT +25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency	Fc	—	—	440	—	MHz
	Insertion Loss	F1-F2	410 - 470	—	1.9	2.5	dB
	Return Loss	F1-F2	410 - 470	10	16	—	dB
Stopband, Lower	Rejection	DC-F3	DC - 300	45	52	—	dB
		F3-F4	300 - 375	20	32	—	
Stopband, Upper	Rejection	F5-F6	520 - 700	20	32	—	dB
		F6-F7	700 - 1800	50	62	—	
		F7-F8	1800 - 3000	30	54	—	

1. Tested in Evaluation Board P/N TB-BPF-BV440+.

2. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

3. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.


ABSOLUTE MAXIMUM RATINGS<sup>4</sup>

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Input Power <sup>5</sup>	1 W

4. Permanent damage may occur if any of these limits are exceeded.

5. Power rating applies only to signals within the passband.

## TYPICAL FREQUENCY RESPONSE AT +25°C

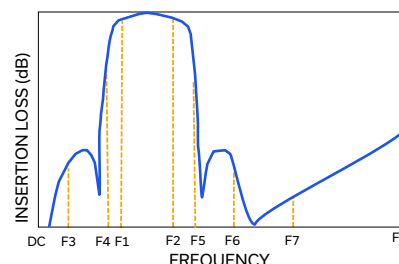

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

 REV. OR  
 ECO-026999  
 BPF-BV440+  
 EDU5078  
 URJ  
 250916

PAGE 1 OF 4



Mini-Circuits

LUMPED LC SURFACE MOUNT






# Bandpass Filter

**BPF-BV440+**

50Ω

410 to 470 MHz

## TYPICAL PERFORMANCE GRAPHS

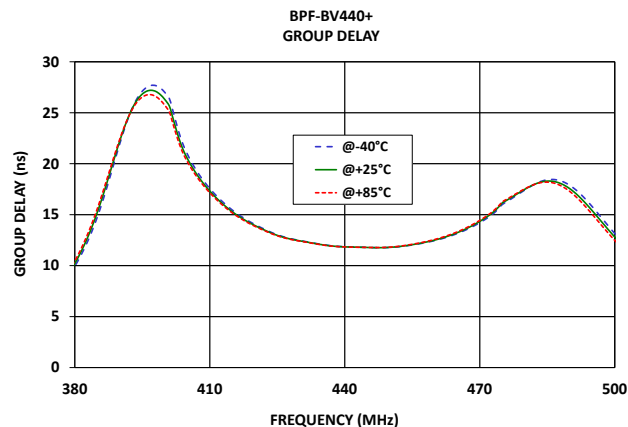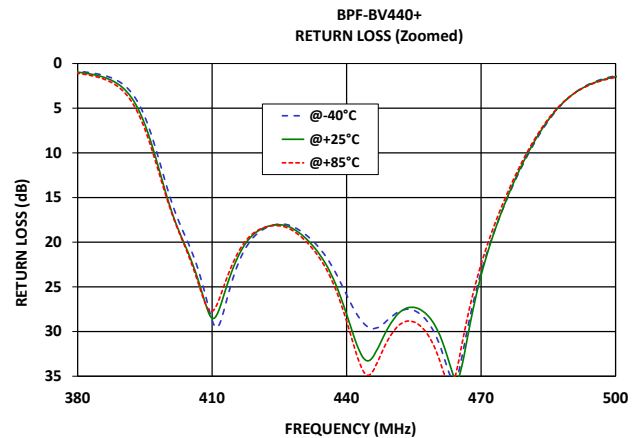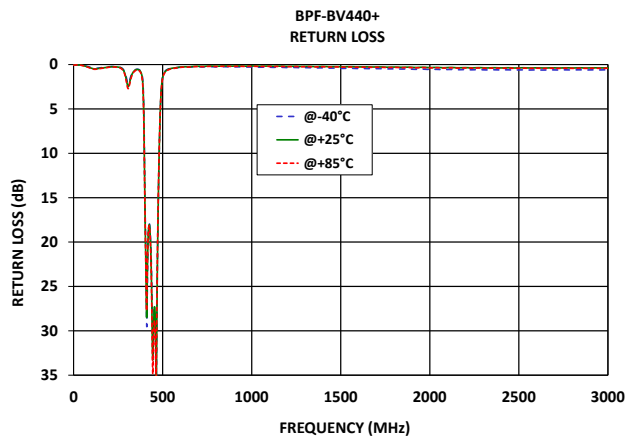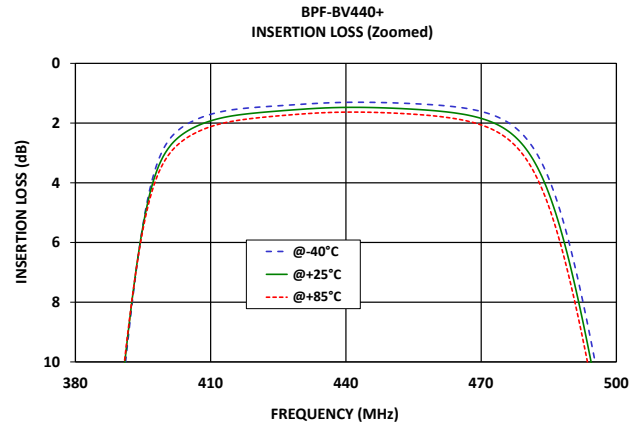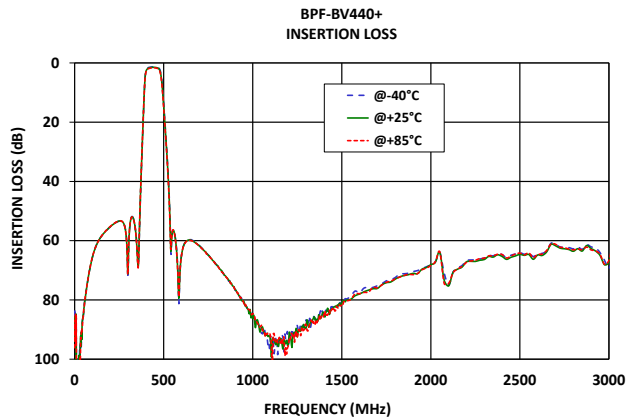



Mini-Circuits

LUMPED LC SURFACE MOUNT

## Bandpass Filter

BPF-BV440+

50 $\Omega$ 

410 to 470 MHz

## FUNCTIONAL DIAGRAM

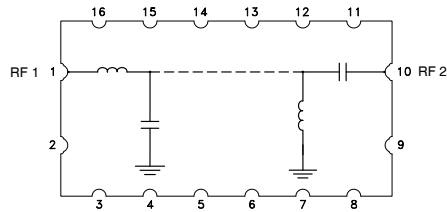



Figure 1. BPF-BV440+ Functional Diagram

## PAD DESCRIPTION

Function	Pad Number	Description
RF1	1	Connects to RF Input Port
RF2	10	Connects to RF Output Port
GROUND	2-9,11-16	Connects to Ground on PCB, (See drawing PL-507)

## SUGGESTED PCB LAYOUT

SUGGESTED MOUNTING CONFIGURATION FOR  
KV1974 CASE STYLE, "16FL02" PIN CODE

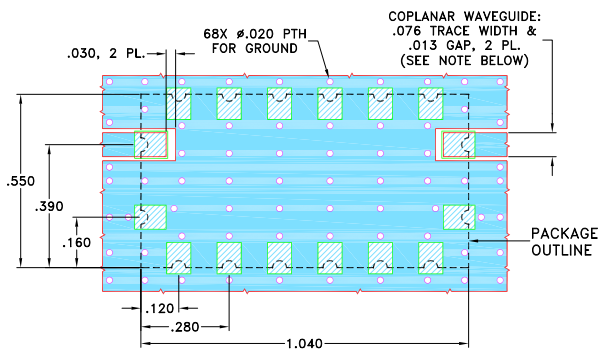


NOTE:

- COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .060"  $\pm$  .004"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Figure 2. Suggested PCB Layout

## CASE STYLE DRAWING

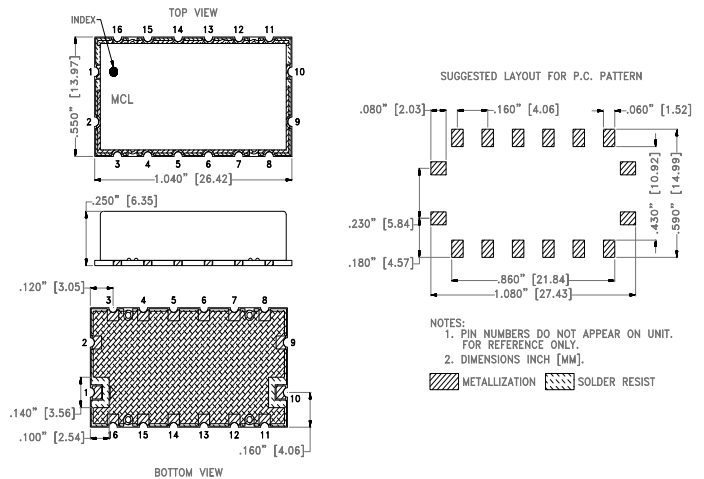

Unit Weight: 2.5gram

Dimensions are in inches [mm]. Tolerances: 2Pl.  $\pm$  .03; 3Pl.  $\pm$  .015

## PRODUCT MARKING\*: BPF-BV440

\*Marking may contain other features or characters for internal lot control.



Mini-Circuits

LUMPED LC SURFACE MOUNT

# Bandpass Filter

**BPF-BV440+**

50Ω

410 to 470 MHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASHBOARD.

[CLICK HERE](#)

Performance Data and Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	KV1974-1 Lead Finish: Gold over Nickel Plate
RoHS/REACH Status	Compliant
Tape and Reel	F005
Suggested Layout for PCB Design	PL-507
Evaluation Board	TB-BPF-BV440+
	Gerber File
Environmental Rating	ENV02T1
MSL Level	MSL1

## NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

