

# Surface Mount Bandpass Filter

## BPF-F1950+

50Ω 1450 to 2450 MHz

### The Big Deal

- Broad bandwidth
- High Rejection
- Good VSWR
- Shielded package



CASE STYLE: HP1156

### Product Overview

BPF-F1950+ is a 50Ω bandpass filter in a shielded package fabricated using SMT technology. This bandpass filter covers from 1450 to 2450 MHz. This filter offers low insertion loss and VSWR in the passband for use in digital cable TV networks and 4G LTE networks.

### Key Features

Feature	Advantages
Low insertion loss	Can be used in digital cable TV networks and 4G LTE networks.
Good rejection	This enables the filter attenuate spurious signals and reject harmonics for broad frequency band.
Shielded package	The small surface mount package enables the BPF-F1950+ to used in compact design.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount Bandpass Filter

## BPF-F1950+

50Ω 1450 to 2450 MHz



CASE STYLE: HP1156

### Features

- Broad bandwidth
- Sharper cut-off
- Shielded package

### Applications

- Digital television
- Broad band wireless 4G LTE band
- Biomedical telemetry device
- Wireless microphone

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	—	1950	—	MHz	
	Insertion Loss	F1-F2	1450-2450	—	2.0	3.0	dB
	VSWR	F1-F2	1450-2450	—	1.5	1.78	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC-1100	30	40	—	dB
	VSWR	DC-F3	DC-1100	—	20	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	2750-4000	30	40	—	dB
	VSWR	F4-F5	2750-4000	—	20	—	:1

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	1 W

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

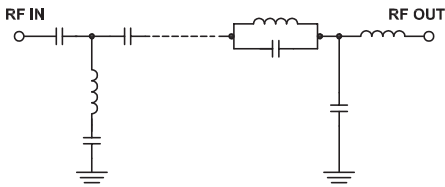

### Typical Frequency Response




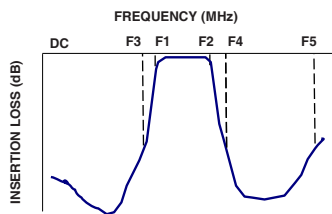


### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1	102.28	350.21	1450	3.06
100	88.67	991.99	1500	2.48
500	48.85	255.74	1550	2.18
1100	59.60	65.45	1600	2.02
1200	64.16	48.88	1650	1.90
1265	30.51	29.95	1700	1.79
1295	19.81	18.28	1750	1.71
1325	9.75	6.92	1800	1.67
1355	3.25	1.91	1850	1.65
1450	1.15	1.16	1950	1.64
1950	0.81	1.11	2000	1.63
2450	1.47	1.07	2050	1.63
2560	3.14	1.59	2100	1.64
2605	9.07	5.09	2150	1.69
2650	19.91	12.21	2200	1.75
2685	29.56	16.92	2250	1.82
2750	47.40	22.95	2300	1.92
3000	43.42	24.20	2350	2.03
3500	67.36	22.12	2400	2.23
4000	62.41	47.79	2450	2.53

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

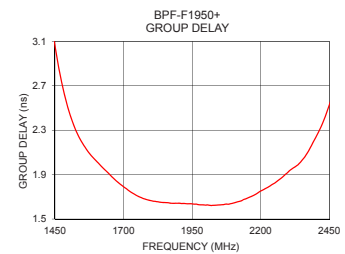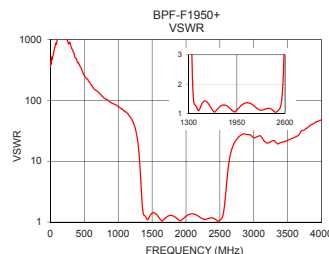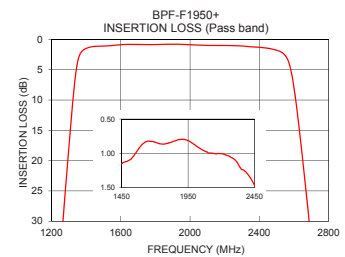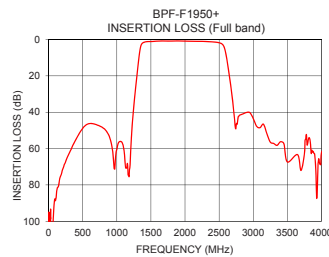

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR  
M159590  
BPF-F1950+  
EDU2462  
URJ  
170125  
Page 2 of 3

## Pad Connections



INPUT	18
OUTPUT	11
GROUND	1,3,4,5,6,7,8,10,12,13,14,15,16,17
NO CONNECTION	2,9

## Demo Board MCL P/N: TB-695+ Suggested PCB Layout (PL-418)

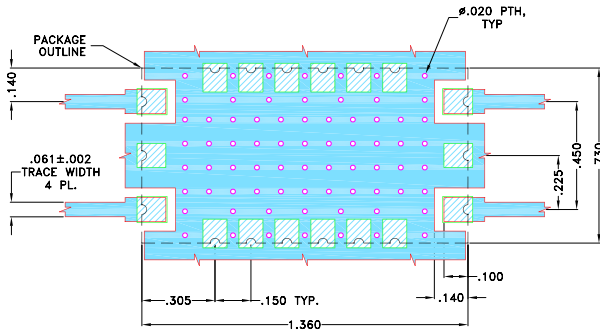

- NOTES:**
- TRACE WIDTH IS SHOWN FOR OAK-602, WITH DIELECTRIC THICKNESS  $.022 \pm .0015"$ , COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
    - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
    - DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

## Outline Drawing

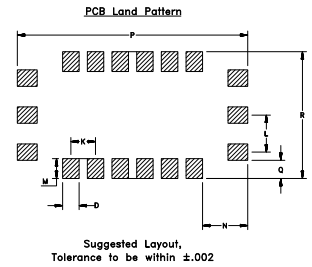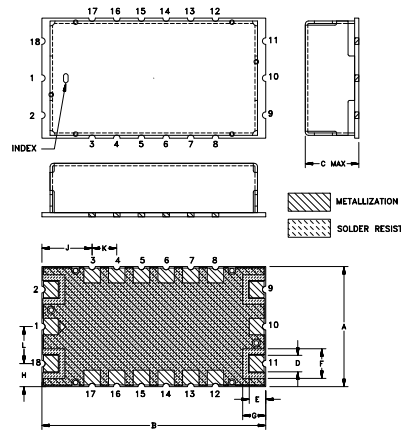

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.730	1.360	.350	.100	.100	.180	.140	.140	.305
18.54	34.54	8.89	2.54	2.54	4.57	3.56	3.56	7.75
K	L	M	N	P	Q	R	Wt.	
.150	.225	.120	.275	1.400	.110	.770	grams	
3.81	5.72	3.05	6.99	35.56	2.79	19.56	6.0	

**Notes**

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

