


Surface Mount

Diplexer

DPLX-6588A0+

75Ω DC to 1000 MHz
(DC-65, 88-1000 MHz)



CASE STYLE: NU1620

The Big Deal

- Low insertion loss
- High rejection, 50dB typ.
- 75Ω Impedance
- Used in DOCSIS 3.0 standard

Product Overview

DPLX-6588A0+ has lowpass port at DC-65 MHz and highpass port at 88-1000 MHz. Good return loss combined with high out of channel rejection makes it a ideal component in cable TV and multiband radio systems.

Key Features

Feature	Advantages
Low passband insertion loss	Low passband insertion loss ensures low signal loss through both the channels.
Good stopband rejection	Co-channel rejection of 50dB ensures unwanted spurious are eliminated.
Good return loss at DC-65 and 88-1000 MHz	This makes signal transmission with very less reflection and well-matched with the adjacent component used in the system.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount Diplexer

DPLX-6588A0+

75Ω DC to 1000 MHz (DC-65, 88-1000 MHz)



CASE STYLE: NU1620

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40° to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	30dBm Max.

Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation

Pin Connections

HIGH PASS PORT	7
LOW PASS PORT	9
COMMON PORT	18
GROUND	1-6,8,10-17,19,20

Features


- Low insertion loss
- 75Ω Impedance
- Good return loss
- High rejection

Applications

- Cable TV systems (DOCSIS 3.0 standard)
- Multiband radio systems

CAUTION NOTE: Open units are not recommended for use with Aqueous wash systems. Please evaluate your wash process before use.

Outline Drawing

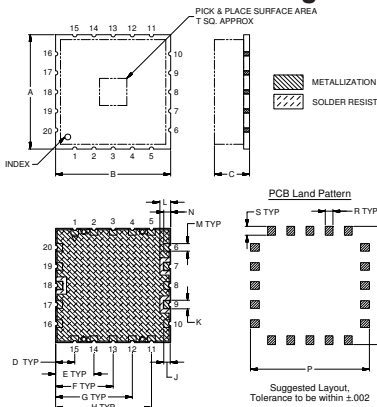


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	
		Max	Min							
1.181	1.181	.260	.205	.197	.394	.591	.787	.984	.066	.089
30.00	30.00	7.11	5.21	5.00	10.00	15.00	20.00	25.00	1.68	2.26
			N	P	Q	R	S	T		Wt.
										grams
										3.6
.111	.079		.071	1.221	1.221	.079	.091	.280		
2.82	2.01		1.80	31.01	31.01	2.01	2.31	7.11		

Demo Board MCL P/N: TB-786+ Suggested PCB Layout (PL-435)

SUGGESTED MOUNTING CONFIGURATION FOR NU1620, NV1998, NZ2001, PA2002 CASE STYLE "20DP01" PIN CODE

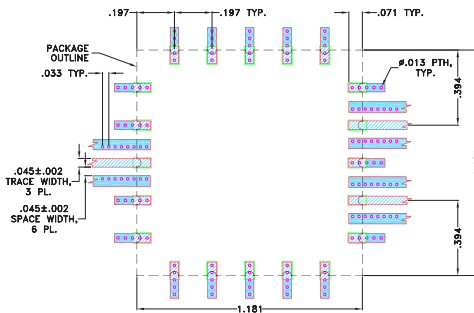

- TRACE WIDTH IS SHOWN FOR OAK-602 WITH DIELECTRIC THICKNESS .031±.002". COPPER: 1/2 OZ. EACH SIDE FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK


Electrical Specifications at 25°C

Parameter	Port	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	Low Pass	DC-65	-	1.0	1.4	dB
		High Pass	88-1000	-	1.0	1.4	
	Return Loss	Low Pass	DC-65	16	18	-	dB
		High Pass	88-1000	15	18	-	
Common		88-1000	15	18	-		
Stop Band Isolation	Low Pass	88-1000	42	50	-	dB	
	High Pass	DC-65	42	50	-		

Typical Performance Data at 25°C

FREQUENCY (MHz)	INSERTION LOSS (dB)			RETURN LOSS (dB)	
	Low Pass Port	High Pass Port	Common Port	Low Pass Port	High Pass Port
1.0	0.04	71.03	42.33	42.25	0.00
10.0	0.11	53.68	27.59	28.22	0.00
40.0	0.31	67.38	23.12	23.75	0.12
50.0	0.44	56.02	22.67	22.19	0.22
60.0	0.70	59.55	20.61	19.99	0.37
65.0	0.91	68.75	24.07	23.49	0.49
68.0	1.16	51.36	32.26	37.33	0.58
72.0	2.51	32.79	10.77	12.44	0.78
72.5	2.99	30.19	9.04	10.41	0.82
74.5	6.69	20.17	4.18	4.63	1.04
75.0	8.15	18.04	3.52	3.77	1.13
77.0	15.75	11.30	2.60	1.91	1.77
78.0	20.38	8.74	2.86	1.51	2.34
80.0	30.89	4.95	4.55	1.09	4.33
81.5	38.20	3.15	6.84	0.92	6.74
85.0	47.41	1.35	15.16	0.70	15.33
88.0	56.33	0.93	24.16	0.59	26.26
100.0	68.58	0.53	26.59	0.42	27.30
250.0	62.99	0.23	32.68	0.12	32.82
500.0	58.18	0.28	23.74	0.07	23.75
950.0	52.38	0.44	18.19	0.26	18.73
1000.0	51.48	0.44	18.62	0.29	19.26

Functional Schematic

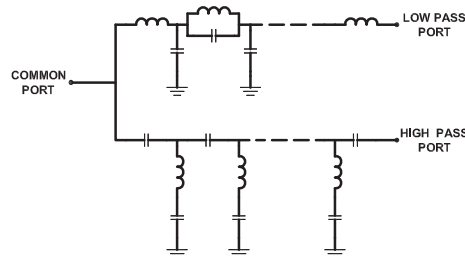







Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M172858
EDU1481_2
DPLX-6588A0+
URJ
190226
Page 2 of 3

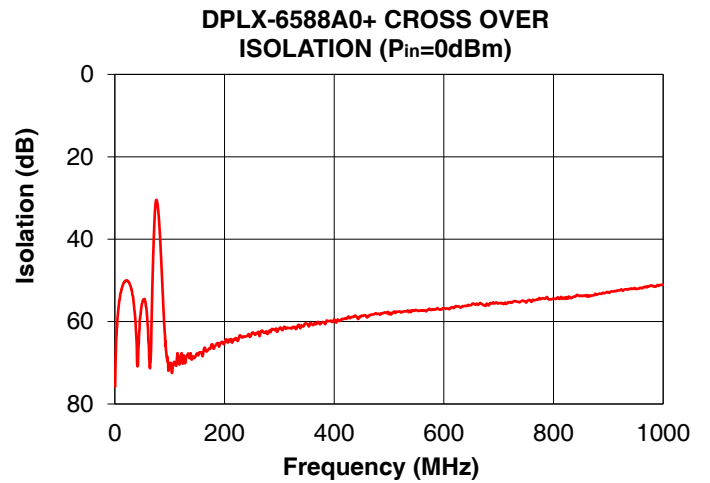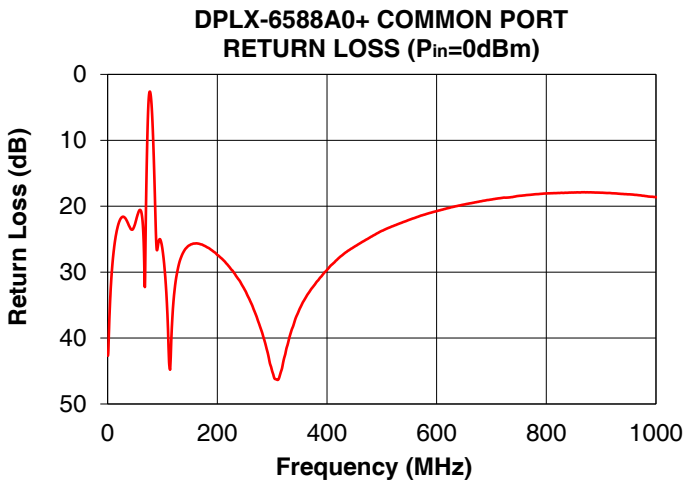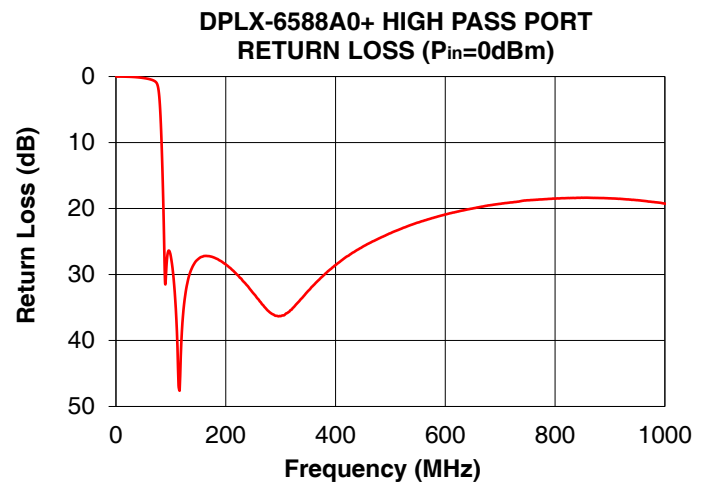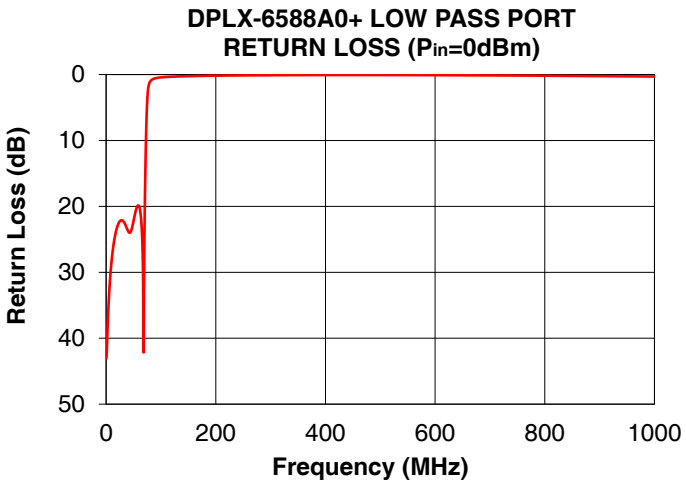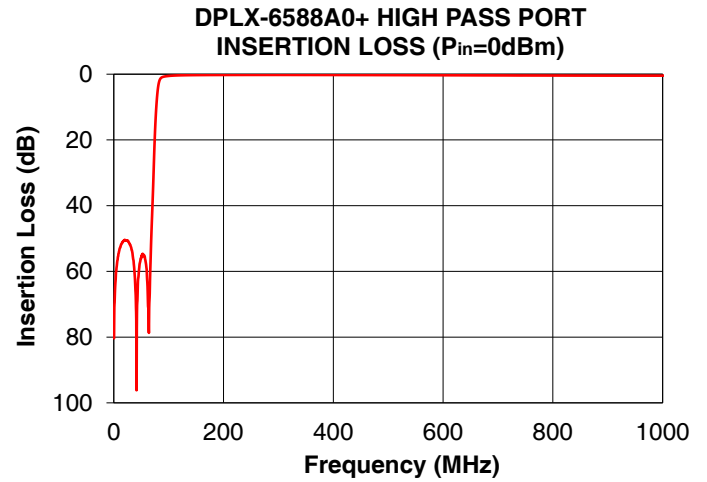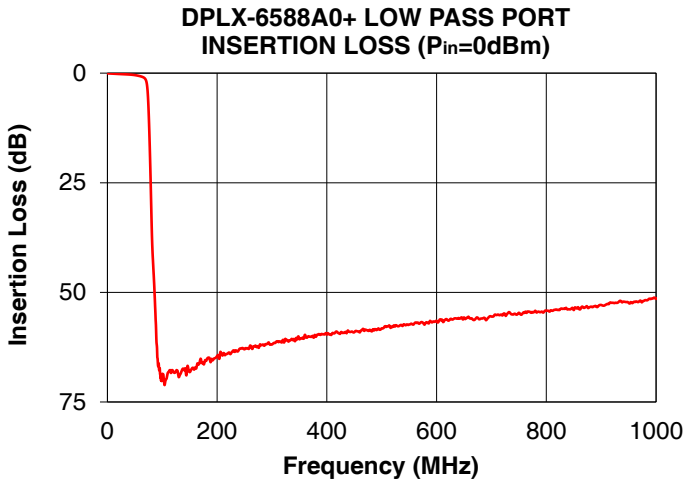

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

