



Mini-Circuits®

CERAMIC


## High Pass Filter

HFCN-3100AT+

50Ω 3400 to 9900 MHz

## THE BIG DEAL

- Small size
- 5 sections
- Temperature stable
- Excellent power handling, 7W
- Hermetically sealed
- LTCC construction
- Low cost
- Protected by US Patent 7,760,485
- AEC-Q200 qualified component family



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

## +RoHS Compliant

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

## APPLICATIONS

- Automotive

ELECTRICAL SPECIFICATIONS<sup>1,2</sup> AT +25°C

| Parameter | Frequency (MHz) | Min.       | Typ. | Max. | Units |
|-----------|-----------------|------------|------|------|-------|
| Stop Band | Rejection Loss  | 2500       | —    | 30   | dB    |
|           |                 | 2450       | 20   | —    |       |
|           | Freq. Cut-Off   | 3100       | —    | 3.0  | dB    |
|           | VSWR            | 2450-2500  | —    | 20   |       |
| Pass Band | Insertion Loss  | 3400-9900  | —    | 2.0  | dB    |
|           |                 | 3500-9500  | —    | 1.5  |       |
|           | VSWR            | 3100-10500 | —    | 1.5  | :1    |

1. In Application where DC voltage is present at either input or output ports, coupling capacitors are required. Alternatively, Mini-Circuits' "D" suffix version of this model will provide >100 MOhm isolation to ground.


2. Electrical performance measured on TB-270 using HFCN-3100+.

## ABSOLUTE MAXIMUM RATINGS


| Parameter                   | Ratings           |
|-----------------------------|-------------------|
| Operating Temperature       | -40°C to +105°C   |
| Storage Temperature         | -40°C to +105°C   |
| RF Power Input <sup>3</sup> | 7 W max. at +25°C |

3. Passband rating, derate linearly to 3W at +105°C ambient.  
Permanent damage may occur if any of these limits are exceeded.

## TYPICAL FREQUENCY RESPONSE

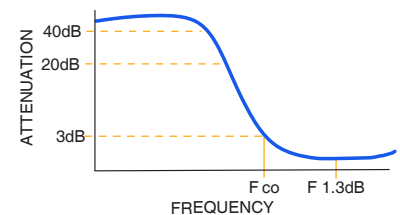

## FUNCTIONAL SCHEMATIC

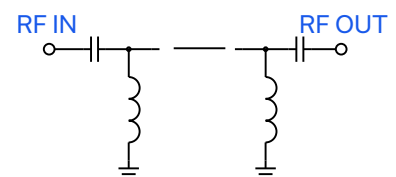

REV. OR  
NPO-005308  
HFCN-3100AT+  
MCL NY  
250606

Mini-Circuits®



Mini-Circuits®

CERAMIC

## High Pass Filter

HFCN-3100AT+


50Ω 3400 to 9900 MHz

## PIN CONNECTIONS

|        |         |
|--------|---------|
| RF IN  | 1       |
| RF OUT | 3       |
| GROUND | 2,4,5,6 |

PRODUCT MARKING: N/A

DEMO BOARD MCL P/N: TB-285  
SUGGESTED PCB LAYOUT (PL-158)

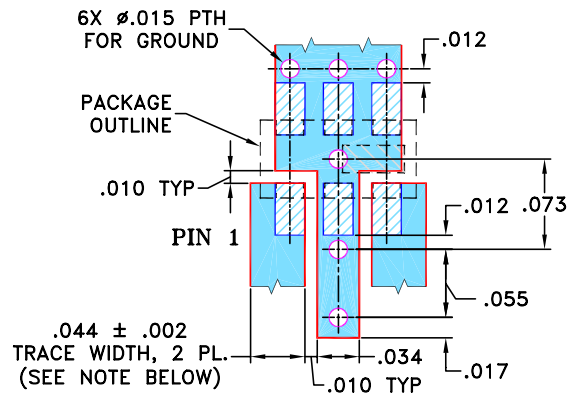


- NOTE:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350 WITH DIELECTRIC THICKNESS:  $.020 \pm .0015$ ; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.




DENOTES PCB COPPER LAYOUT

DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

## OUTLINE DRAWING

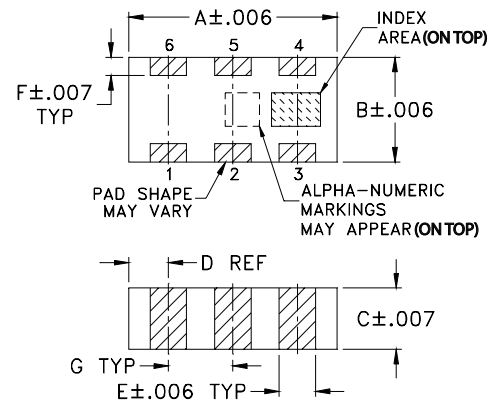

## PCB Land Pattern



Suggested Layout,  
Tolerance to be within  $\pm .002$

## OUTLINE DIMENSIONS (Inches mm)

| A    | B    | C    | D    | E    | F     |
|------|------|------|------|------|-------|
| .126 | .063 | .035 | .024 | .022 | .011  |
| 3.20 | 1.60 | 0.89 | 0.61 | 0.56 | 0.28  |
| G    | H    | J    | K    |      | wt    |
| .039 | .024 | .042 | .123 |      | grams |
| 0.99 | 0.61 | 1.07 | 3.12 |      | .020  |

## TAPE &amp; REEL INFORMATION: F75

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 2 OF 3



Mini-Circuits

CERAMIC


# High Pass Filter

HFCN-3100+

50Ω 3400 to 9900 MHz

## TYPICAL PERFORMANCE DATA AT +25°C

| Frequency (MHz) | Insertion Loss (dB) | VSWR (:1) |
|-----------------|---------------------|-----------|
| 50              | 54.41               | 1737.18   |
| 800             | 32.66               | 115.81    |
| 1810            | 54.18               | 59.91     |
| 2450            | 40.03               | 26.74     |
| 2500            | 33.38               | 25.19     |
| 2700            | 16.65               | 15.00     |
| 2920            | 6.20                | 4.89      |
| 3100            | 2.22                | 1.87      |
| 3400            | 1.01                | 1.27      |
| 3500            | 0.94                | 1.32      |
| 5000            | 0.66                | 1.09      |
| 7000            | 0.68                | 1.31      |
| 9000            | 0.88                | 1.21      |
| 9500            | 0.78                | 1.29      |
| 9900            | 0.88                | 1.39      |
| 10500           | 1.21                | 1.52      |
| 11000           | 1.76                | 1.68      |

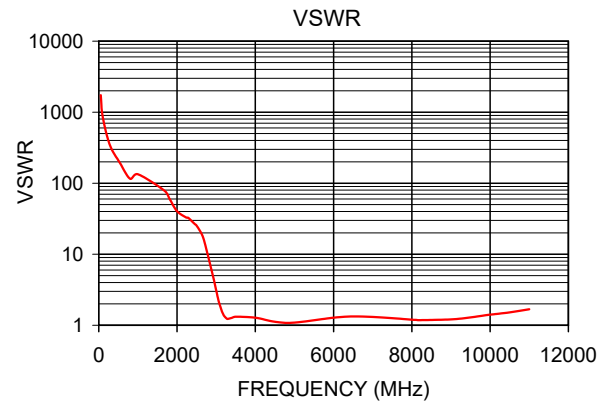

### NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

