

## Frequency Mixer

# HJK-ED14451/3

Level 17 (LO Power + 17 dBm)

### Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : TTT881

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fu)	10		220	MHz
	RF (fL to fu)	40		250	MHz
	IF	10		100	MHz
Conversion Loss	mid band		7.5		dB
	Total Range		8		dB
LO-RF Isolation	Low Range		55		dB
	Mid Range		52		dB
	Upper Range		50		dB
LO-IF Isolation	Low Range		45		dB
	Mid Range		42		dB
	Upper Range		40		dB
Input IP3			+28		dBm
1 dB Compression			+20		dBm

Note: Low Range = [fL to 10fL]  
mid band = [2fL to fu/2]


Mid Range = [10fL to fu/2]

Upper Range = [fu/2 to fu]

MAXIMUM RATINGS	
Operating Temperature	-40°C TO +85°C
Storage Temperature	-55°C TO +100°C

PIN CONNECTIONS	
LO	2
RF	1
IF	3
GROUND	4,5,6

### Electrical Schematic

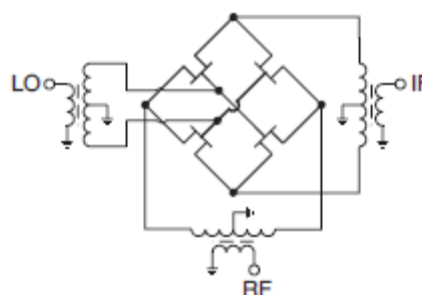

**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site  
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS

[minicircuits.com](http://minicircuits.com)

REV. X1  
HJK-ED14451/3  
6/8/2012  
Page 1 of 1