

LRPS-3-1+



CASE STYLE: QQQ130

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.375W max.

Permanent damage may occur if any of these limits are exceeded.

SUM PORT	6
PORT 1	1
PORT 2	2
PORT 3	3
GROUND	4.5

Suggested Layout.

A	B	C	D	E	F	G
.400	.31	.200	.10	.010	.100	.050
10.16	7.87	5.08	2.54	0.25	2.54	1.27

H	J	K	L	M	wt
.420	.120	.060	.100	.020	grams
10.67	3.05	1.52	2.54	0.51	0.55

Figure 1: Typical PCB layout for the package. The diagram shows a top-down view of a square package with a central square pad and four rectangular pads at the corners. Dimensions are given in inches. The central pad has a width of .091 and a length of .15. The corner pads have a width of .032 and a length of .05. The package outline is .100 by .100. The distance between the center of the central pad and the center of a corner pad is .025. The distance between the center of the central pad and the edge of the package is .050. The distance between the center of a corner pad and the edge of the package is .032. The package is labeled 'PIN 6' and '10X FOR'. The layout is for a .067 TRACE WIDTH, 4 PL. (SEE NOTE 10X FOR).

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MC/Store/terms_iso

- low insertion loss, 0.3 dB typ.
- good isolation, 25 dB typ.




- VHF/UHF
- defense & federal communications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 4.8 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
f _c -f ₀	25	20	25	20	25	20	0.2	0.6	0.3	0.8	0.5	1.2	2	3	4	0.1	0.3	0.7

L = low range [f_i to $10 f_i$] M = mid range [$10 f_i$ to $f_i/2$] U = upper range [$f_i/2$ to f_i]

Freq. (MHz)	Total Loss¹ (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
10.00	5.09	5.10	5.10	0.01	25.23	25.70	25.35	0.12	1.29	1.08	1.09	1.08
20.00	5.09	5.10	5.10	0.01	25.12	25.56	25.20	0.21	1.27	1.06	1.07	1.07
30.00	5.09	5.10	5.10	0.01	24.91	25.32	24.94	0.31	1.26	1.06	1.06	1.06
45.00	5.09	5.10	5.10	0.01	24.63	25.03	24.63	0.42	1.25	1.05	1.06	1.06
60.00	5.10	5.12	5.11	0.01	24.44	24.82	24.38	0.58	1.25	1.05	1.06	1.06
75.00	5.12	5.13	5.13	0.01	24.26	24.64	24.15	0.69	1.25	1.05	1.05	1.06
90.00	5.13	5.14	5.14	0.01	24.12	24.53	23.97	0.82	1.24	1.05	1.05	1.06
110.00	5.15	5.17	5.17	0.01	23.97	24.38	23.75	1.00	1.24	1.05	1.05	1.06
140.00	5.20	5.21	5.21	0.02	23.85	24.26	23.52	1.18	1.23	1.05	1.05	1.06
180.00	5.26	5.28	5.27	0.02	23.91	24.29	23.41	1.48	1.21	1.04	1.04	1.06
210.00	5.31	5.33	5.31	0.02	24.17	24.50	23.53	1.70	1.19	1.04	1.04	1.06
240.00	5.37	5.40	5.38	0.03	24.72	24.91	23.89	1.84	1.16	1.05	1.04	1.06
270.00	5.44	5.47	5.44	0.03	25.65	25.60	24.56	2.00	1.12	1.06	1.05	1.06
290.00	5.49	5.52	5.49	0.03	26.59	26.28	25.26	2.06	1.10	1.07	1.05	1.06
300.00	5.53	5.55	5.52	0.04	27.22	26.71	25.71	2.09	1.09	1.07	1.06	1.06

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

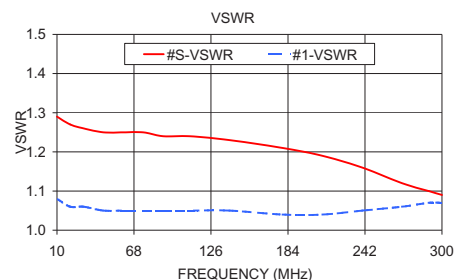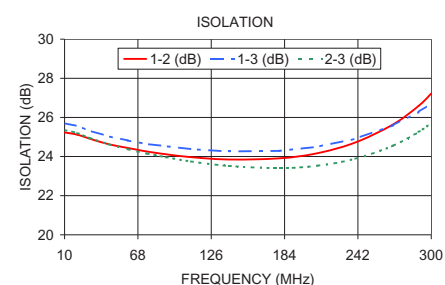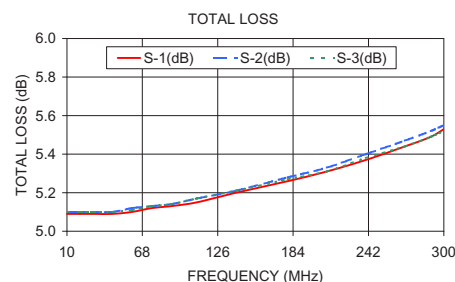

A block diagram of a linear system. A central rectangular block is connected to four ports. On the left, a single input line is labeled "PORT S". On the right, three output lines are labeled "PORT 1", "PORT 2", and "PORT 3" from top to bottom.