



Mini-Circuits

ULTRA-SMALL CERAMIC


Power Splitter/Combiner

QCN-8AT+

2 Way-90° 50Ω 450 to 750 MHz

FEATURES

- Low insertion loss, 0.6 dB typ.
- Wrap-around terminal for excellent solderability
- Ultra small, 0.12"X0.06"X0.035"
- AEC-Q200 qualified component family



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

+RoHS CompliantThe +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Automotive

ELECTRICAL SPECIFICATIONS¹ AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		450		750	MHz
Insertion Loss, above 3.0 dB	450-750		0.6	0.9	dB
	470-700		0.5	0.8	
Isolation	450-750	13	16		dB
	470-700	13	16		
Phase Unbalance	450-750		5	8	Degree
	470-700		5	8	
Amplitude Unbalance	450-750		0.5	1.0	dB
	470-700		0.3	0.8	
VSWR	450-750		1.4		(:1)
	470-700		1.4		

1. Tested on TB-255+ using QCN-8+ with evaluation board losses de-embedded.

2. For applications requiring DC voltage to be applied to the RF ports, add suffix letter "D" to part no. DC resistance to ground is 100 Mohms min.


ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to +105°C
Storage Temperature	-40°C to +105°C
Power Input (as a splitter)*	15 W max. at +25°C

* Derate linearly to 7 W at +105°C ambient.

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC



Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
NPO-005333
QCN-8AT+
ED-11876D/1
MCL NY
250611
PAGE 1 OF 3



Mini-Circuits

ULTRA-SMALL CERAMIC

Power Splitter/Combiner

QCN-8AT+


2 Way-90° 50Ω 450 to 750 MHz

PIN CONNECTIONS

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

PRODUCT MARKING: N/A

DEMO BOARD MCL P/N: TB-255
SUGGESTED PCB LAYOUT (PL-131)

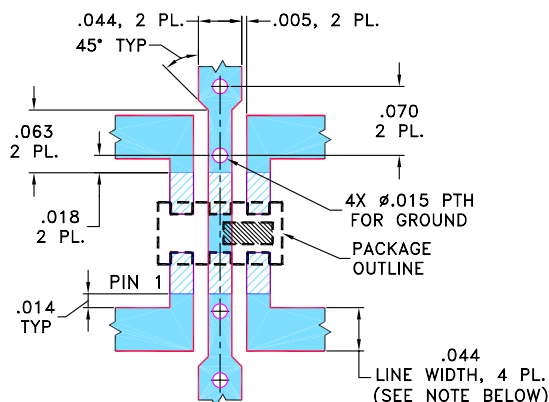


NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $0.020" \pm 0.0015"$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.


2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

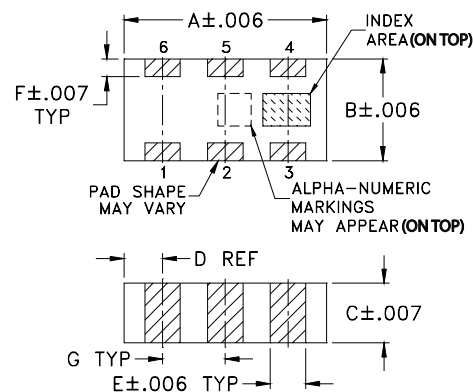

PCB Land Pattern



Suggested Layout,
Tolerance to be within ± 0.002

OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12	.020	

TAPE & REEL INFORMATION: F75





Mini-Circuits®

ULTRA-SMALL CERAMIC

Power Splitter/Combiner




QCN-8AT+

2 Way-90° 50Ω 450 to 750 MHz

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR (:1)		
	S-1	S-2				S	1	2
450	3.27	3.76	0.49	15.68	85.22	1.41	1.41	1.38
460	3.32	3.71	0.40	15.70	85.29	1.40	1.41	1.38
470	3.36	3.67	0.31	15.72	85.37	1.40	1.41	1.37
510	3.49	3.53	0.04	15.84	85.66	1.39	1.40	1.36
550	3.58	3.45	0.13	15.95	86.00	1.37	1.40	1.36
570	3.61	3.43	0.18	16.01	86.18	1.37	1.40	1.36
590	3.63	3.42	0.20	16.07	86.37	1.36	1.40	1.36
610	3.63	3.43	0.20	16.12	86.62	1.36	1.40	1.36
630	3.62	3.46	0.17	16.16	86.85	1.36	1.40	1.37
650	3.60	3.50	0.11	16.18	87.12	1.36	1.41	1.38
670	3.57	3.56	0.01	16.19	87.43	1.37	1.41	1.39
690	3.53	3.64	0.11	16.19	87.77	1.37	1.43	1.40
710	3.48	3.74	0.27	16.17	88.15	1.38	1.44	1.42
730	3.41	3.87	0.46	16.13	88.60	1.40	1.46	1.45
750	3.33	4.03	0.70	16.07	89.12	1.41	1.48	1.48

1. Total Loss = Insertion Loss + 3 dB splitter loss.

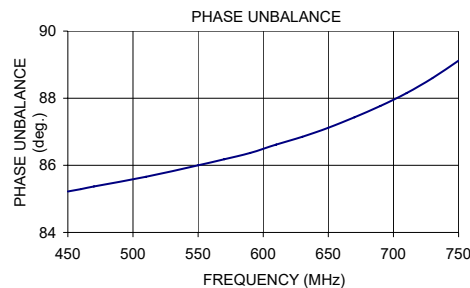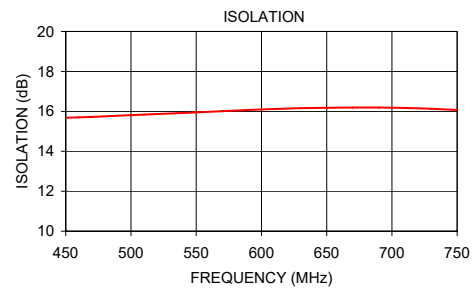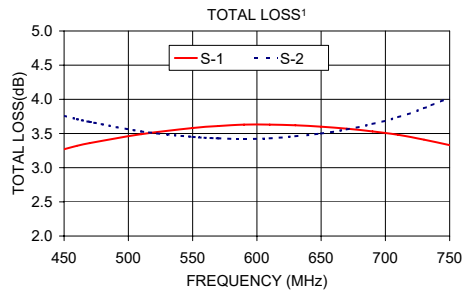

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

