

Surface Mount

RF Transformer

SCTX1.33-33-2W+

75Ω 10 to 3000 MHz

The Big Deal

- 75 ohm single-ended to 100 ohm differential outputs
- Super wideband, 10 to 3000 MHz
- Low insertion loss, 2.0 dB typ. up to 3 GHz
- Amplitude Unbalance, ± 0.3 dB typ. up to 3 GHz
- Good input return loss, 14 dB typ.
- Low phase unbalance, $\pm 3^\circ$ typ.
- Common mode rejection, 28 dB typ.



CASE STYLE: SN2595

Product Overview

Mini-Circuits' SCTX1.33-33-2W+ is a surface-mount transmission line transformer (core and Semi-Rigid cable) covering a very wide frequency range from 10 to 3000 MHz. The transformer provides low insertion loss with excellent phase and amplitude performance. Featuring core and cable construction on a 12-lead PCB unit measures 0.60 x 0.60 x 0.15 accommodating dense circuit board layouts.

Key Features

Feature	Advantages
Wideband, 10 to 3000 MHz	Super wide frequency range covers bandwidth requirements for many broadband applications.
Low insertion loss, 2.0 dB	SCTX1.33-33-2W+ provides excellent signal transmission from input to output with consistent performance across its entire frequency range.
Good Phase and Amplitude Unbalance	Provides good CMRR and IP2.
Small size (0.60 x 0.60 x 0.15)	Provide good solderability and tight layouts.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount RF Transformer

SCTX1.33-33-2W+

75Ω 10 to 3000 MHz 1:1.33 Ratio

Maximum Ratings



Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	2W

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

PRIMARY DOT	12
PRIMARY (GND)	11
SECONDARY DOT	3
SECONDARY	4
GROUND	1,2,5,6,7,8,9,10

Outline Drawing

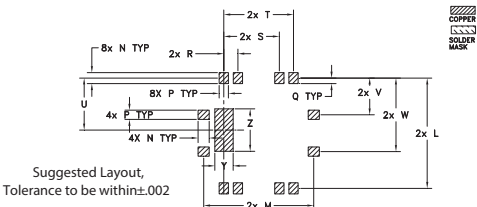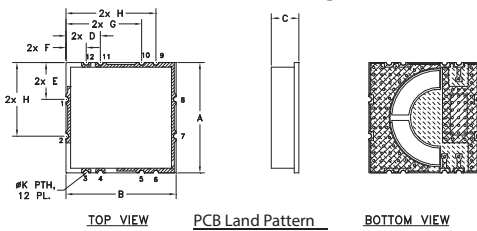

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M
.600	.600	.150	.187	.200	.110	.412	.490	.400	.030	.600	.600
15.24	15.24	3.81	4.75	5.08	2.79	10.46	12.45	10.16	0.76	15.24	15.24
N	P	Q	R	S	T	U	V	W	Y	Z	wt
.060	.050	.030	.076	.303	.380	.283	.200	.400	.100	.231	grams
1.52	1.27	0.76	1.93	7.70	9.65	7.19	5.08	10.16	2.54	5.87	1.2

Features

- 75 ohm single-ended to 100 ohm differential outputs
- wide bandwidth 10 to 3000 MHz
- unbalanced to balanced transformer
- excellent amplitude and phase unbalance
- aqueous washable

Applications

- defense communication
- CATV
- DOCSIS 3.1
- cellular
- line of sight links
- wideband push-pull amplifiers

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (secondary/primary)			1.33		
Frequency Range		10		3000	MHz
Insertion Loss (Average)	10-50	—	1.8	2.4	dB
	50-1250	—	1.9	2.5	
	1250-3000	—	2.1	2.8	
Amplitude Unbalance (±)	10-50	—	0.05	0.2	dB
	50-1250	—	0.1	0.3	
	1250-3000	—	0.3	0.7	
Phase Unbalance (±)	10-50	—	2	5	Degree
	50-1250	—	1.5	3	
	1250-3000	—	3	6	
Common mode rejection	10-3000	21	28	—	dB

Typical Performance Data

FREQ. (MHz)	INS. LOSS (dB)	INPUT R. LOSS (dB)	AMP. UNBAL. (dB)	PHASE UNBAL. (deg.)
10	1.89	23.34	0.16	5.67
50	1.90	24.10	0.14	1.14
100	1.90	23.89	0.11	0.81
300	1.91	21.31	0.02	0.66
500	1.93	18.38	0.04	0.31
1000	2.00	14.71	0.07	0.07
1400	2.01	13.80	0.16	0.04
2000	2.04	13.01	0.38	0.86
2400	2.14	12.43	0.47	2.50
3000	2.34	12.44	0.28	5.78




CASE STYLE: SN2595


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Config. G



Demo Board MCL P/N: TB-1005+ Suggested PCB Layout (PL-595)

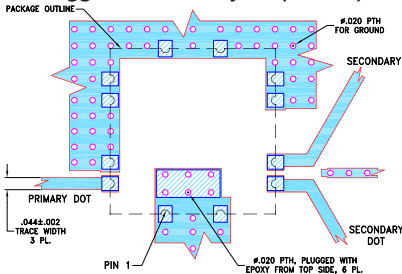

- NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B, WITH DIELECTRIC THICKNESS .020"±.0015". COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

