


Surface Mount Attenuator/Switch

SYAS-860+

50Ω Bi-Phase 600 to 1000 MHz



CASE STYLE: TTT166

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Control Current	30mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	2
CONTROL	3
GROUND	4,5,6


Outline Drawing

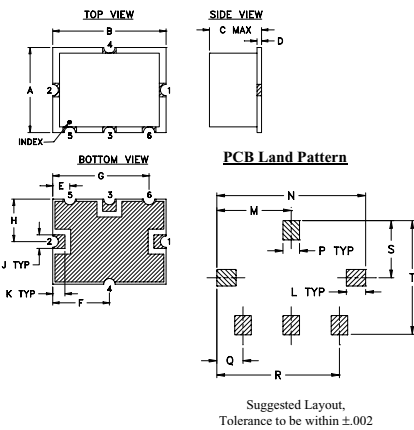


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.38	.50	.15	.020	.075	.250	.425	.187	.050	.050	.070	.270	.540	.060	.095	.445	.208	.415	grams
9.65	12.70	3.81	0.51	1.91	6.35	10.80	4.75	1.27	1.27	1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8

suggested control port biasing configuration



Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)



- NOTE:
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wideband 600 to 1000 MHz

Applications

- bi-phase modulator

Attenuator/Switch Electrical Specifications


FREQUENCY (MHz)	INSERTION LOSS (dB) ±20 mA	MAX. INPUT PWR (dBm) ±20 mA	IN-OUT ISOLATION (dB) 0 mA		BI-PHASE X̄ (±20 mA) Typ.	
			Typ.	Min.	Δ AMP (dB)	Phase (deg.) deviation from 180°
600-1000	DC-0.05	1 dB compr. no damage	25	18	0.5	4.0

Performance specifications apply for input power up to 10 dB below stated 1 dB compression.


Typical Performance Data

Freq. (MHz)	I. Loss (dB) at 20mA	±Control ΔAMP (dB)	20mA ΔPhase (deg.)	Isolation (dB)		Input R. Loss (dB)	Control Current (mA)	Attenuation (dB)			Phase Δ ref at 15mA Ctrl			Input VSWR			
				(in-out)	(in-con)			600 MHz	800 MHz	1000 MHz	600 MHz	800 MHz	1000 MHz	600 MHz	800 MHz	1000 MHz	
600	2.30	0.015	0.07	182.1	30	20	10.8	0.0000	35.3	29.9	28.6	-60.9	-101.2	-133.3	2.9	2.3	3.1
627	2.31	0.013	0.06	182.4	30	20	11.2	0.0001	28.3	28.3	29.9	11.7	-34.3	-80.9	2.9	2.3	3.0
640	2.35	0.011	0.06	182.4	29	20	11.3	0.0002	21.8	22.6	25.3	14.5	-18.8	-51.0	2.7	2.2	2.9
667	2.37	0.007	0.06	182.6	29	21	11.4	0.0003	18.4	19.2	21.9	11.1	-16.0	-41.8	2.5	2.1	2.7
680	2.35	0.005	0.07	182.8	29	21	11.4	0.0004	16.4	17.2	19.8	9.9	-13.7	-36.0	2.4	2.0	2.6
707	2.34	0.005	0.08	182.7	28	21	11.2	0.0008	14.1	14.9	17.2	9.4	-10.4	-28.8	2.2	1.8	2.4
720	2.34	0.007	0.10	182.9	28	22	11.1	0.0015	11.7	12.3	14.5	8.8	-7.2	-21.8	1.9	1.7	2.3
747	2.37	0.008	0.13	183.0	28	22	10.7	0.0029	9.3	9.9	11.8	7.8	-4.8	-15.9	1.7	1.5	2.2
773	2.44	0.009	0.16	183.2	27	22	10.2	0.0059	7.2	7.8	9.5	6.1	-3.3	-11.3	1.4	1.4	2.2
787	2.49	0.011	0.19	183.2	27	22	10.0	0.0095	5.6	6.2	7.8	4.4	-2.3	-7.9	1.2	1.4	2.3
813	2.59	0.014	0.20	183.3	26	22	9.5	0.0200	4.5	5.1	6.6	3.1	-1.7	-5.1	1.2	1.5	2.6
827	2.60	0.018	0.24	183.6	26	22	9.2	0.0344	3.7	4.3	5.8	2.0	-1.2	-3.8	1.3	1.7	2.9
853	2.76	0.021	0.26	183.7	26	21	8.6	0.0559	3.3	3.9	5.3	1.3	-1.0	-2.7	1.4	1.8	3.2
880	2.94	0.032	0.33	183.8	26	20	8.1	0.0814	3.0	3.6	5.0	0.8	-0.9	-2.0	1.5	1.9	3.4
893	3.03	0.037	0.35	183.8	25	20	7.9	0.1072	2.8	3.4	4.8	0.7	-0.9	-1.7	1.5	1.9	3.6
920	3.18	0.040	0.40	183.9	25	19	7.4	0.1926	2.6	3.2	4.6	0.3	-0.7	-1.1	1.6	2.0	3.8
933	3.26	0.047	0.43	183.9	25	18	7.2	0.2959	2.5	3.1	4.5	0.1	-0.6	-0.8	1.6	2.1	3.9
960	3.34	0.049	0.48	183.8	25	17	6.7	0.4662	2.4	3.0	4.4	0.0	-0.5	-0.5	1.7	2.1	4.0
973	3.40	0.051	0.49	183.8	25	17	6.6	2.0106	2.3	2.8	4.2	0.0	-0.3	-0.2	1.7	2.2	4.2
1000	3.45	0.050	0.49	183.9	24	16	6.2	15.0980	2.2	2.8	4.1	0.0	-0.1	0.1	1.7	2.2	4.3


SYAS-860 INSERTION LOSS

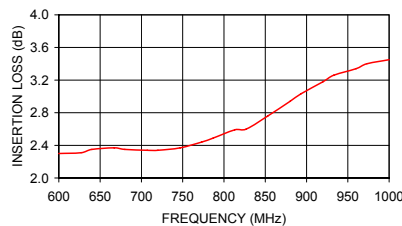

SYAS-860 ISOLATION

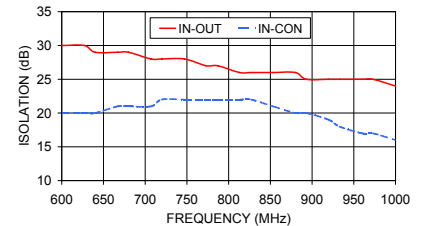

SYAS-860 ATTENUATION

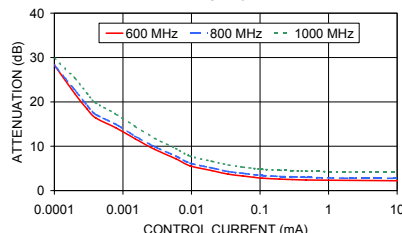

electrical schematic

