

# Plug-In RF Transformer

50Ω 0.01 to 10 MHz

## T-626-X65+ T-626-X65



Generic photo used for illustration purposes only  
CASE STYLE: X65

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

PRIMARY DOT	X1, Y2, Z3
PRIMARY	X6, Y5, Z4

### Features

- single ended to balanced with impedance ratio selection
- also available with flat pack (W38) & surface mount gull-wing (KK81) leads

### Applications


- HF
- test equipment

### Transformer Electrical Specifications

Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
1:1:1	0.01-10	0.01-10	0.02-5	0.04-2

\* Insertion Loss is referenced to mid-band loss, 0.15 dB typ.

### Outline Drawing

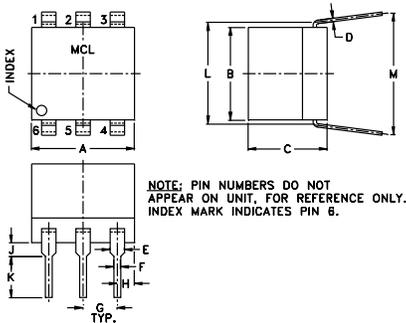

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.30	.27	.23	.010	.042	.020	.100
7.62	6.86	5.84	0.25	1.07	0.51	2.54


  

H	J	K	L	M	wt
.05	.04	.11	.300	.35	grams
1.27	1.02	2.79	7.62	8.89	0.50

### Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
0.01	1.48	6.06
0.04	0.41	12.04
0.11	0.13	24.10
0.20	0.14	30.00
0.40	0.15	33.34
2.00	0.12	33.19
4.68	0.14	29.13
5.00	0.14	28.47
9.68	0.16	25.30
10.00	0.16	24.75

### Config. F

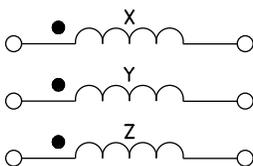

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B  
M151107  
T-626-X65  
IG/TD/CP/AM  
200721

