

Surface Mount Voltage Variable Attenuator

VACC-09+

50Ω 600 to 1200 MHz


Maximum Ratings

Operating Temperature	-45°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Control Current	10mA
Absolute Max. RF Input Level	+15 dBm
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

RF IN	2
V CONTROL 1	8
V CONTROL 2	4
RF OUT	6
GROUND	1,3,5,7


Equivalent schematic of DUT



Outline Drawing

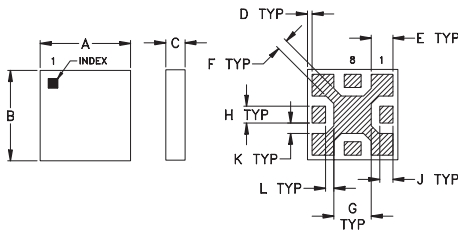

PCB Land Pattern



Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	
.150	.150	.065	.008	.036	.018	.062	.028	.022	
3.81	3.81	1.65	0.20	0.91	0.46	1.57	0.71	0.56	
K	L	M	N	P	Q	R	S	T	WT.
.017	.014	.036	.018	.062	.028	.037	.017	.014	GRAM
0.43	0.36	0.91	0.46	1.57	0.71	0.94	0.43	0.36	.06

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- frequency range, 600-1200 MHz
- IP3, 48 dBm typ.
- minimum current at min. attenuation
- low insertion loss
- protected by US patent 7,030,713

Applications

- variable gain amplifier
- feed forward amps
- ALC circuits



CASE STYLE: GF995

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Electrical Specifications

FREQ (MHz)	INSERTION LOSS (dB)		ATTENUATION (dB)		IP3* (dBm)		RETURN LOSS (dB)		CONTROL VOLTAGE** (V)
	Min.	Max.	Typ.	Min.	Typ.	Min.	Input Typ.	Output Typ.	
600-1200			1.0	2.2	25	20	48	40	0-6


* Input IP3 tested with two tones separated by 1 MHz at 7 dBm each and 0V control voltage.

** Using recommended control port biasing.


VACC-09+ ATTENUATION Vs. FREQUENCY Vs. CONTROL VOLTAGE

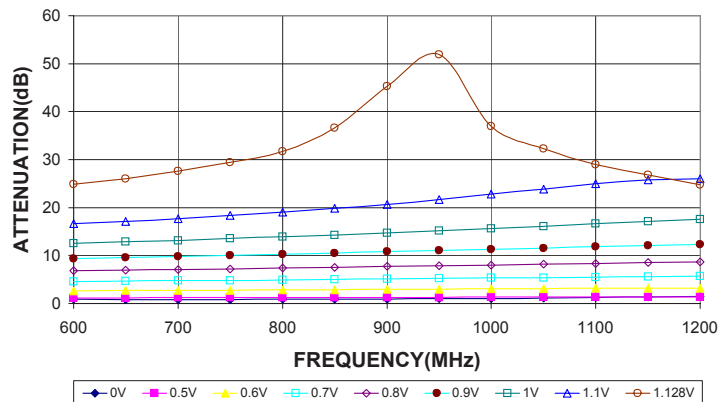

VACC-09+ TYPICAL ATTENUATION AT 900MHz

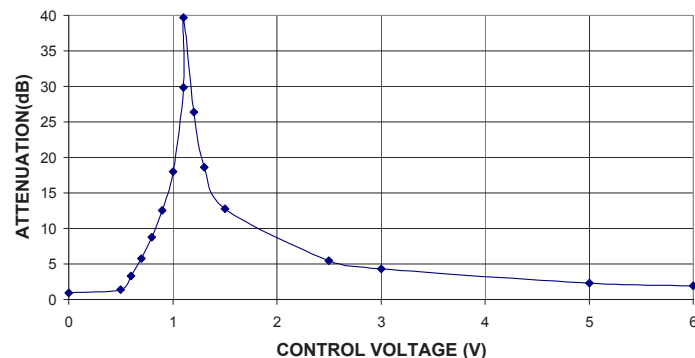


Recommended control port biasing configuration

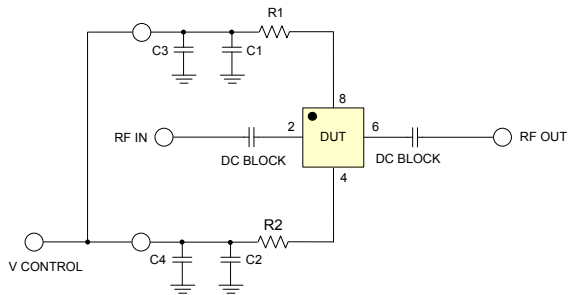

R1, R2: 2K OHM CHIP RESISTOR (0402, AS CLOSE AS POSSIBLE TO THE DEVICE)
C1, C2: 0.01 UF CHIP CAPACITOR (0603)
C3 C4: 6.8 PF CHIP CAPACITOR (0603)


Demo Board MCL P/N: TB-250 Suggested PCB Layout (PL-148)

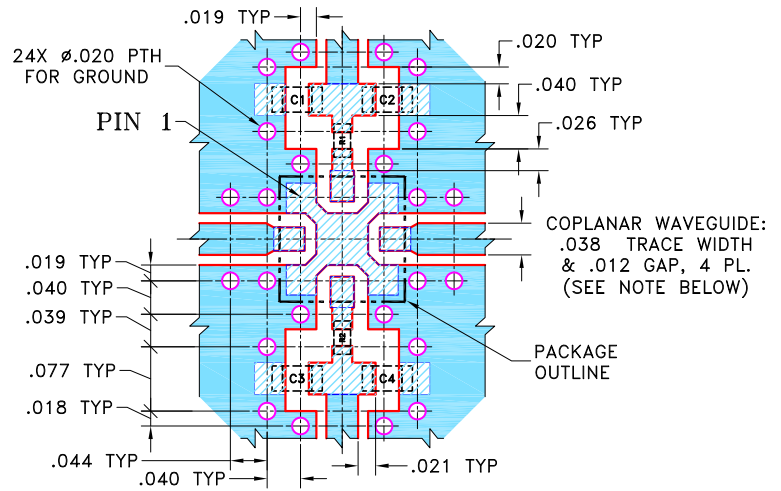


CAPACITORS C1,C3: .01 uF, 0603 SIZE
CAPACITORS C2,C4: 6.8 pF, 0603 SIZE
RESISTORS R1,R2: 2 KOhm, 0402 SIZE

- NOTES:**
1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" \pm .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. IF YOUR PCB DESIGN RULES ALLOW, GROUND VIAS SHOULD BE PLACED UNDER THE LAND PATTERN FOR BETTER RF PERFORMANCE.
 3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

VACC-09+ INPUT RETURN LOSS Vs. FREQUENCY Vs. CONTROL VOLTAGE

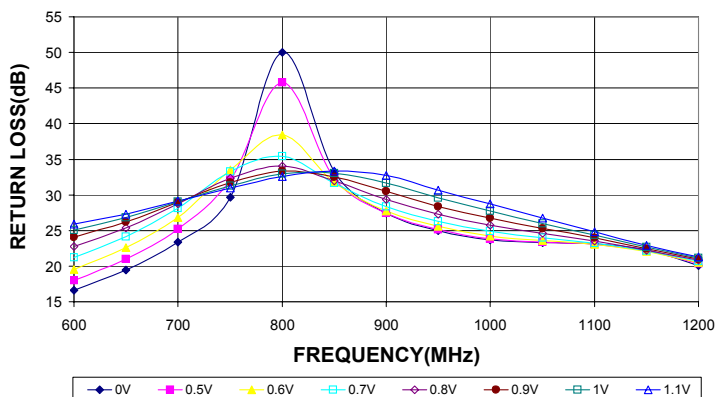

VACC-09+ OUTPUT RETURN LOSS Vs. FREQUENCY Vs. CONTROL VOLTAGE

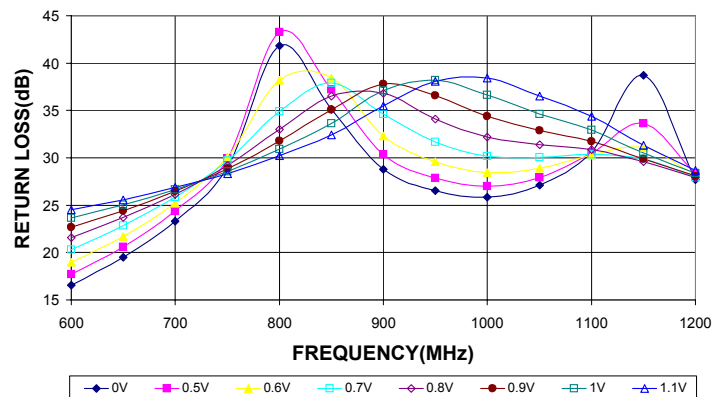


Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




VACC-09+
INSERTION LOSS Vs. INPUT POWER @ 900MHz

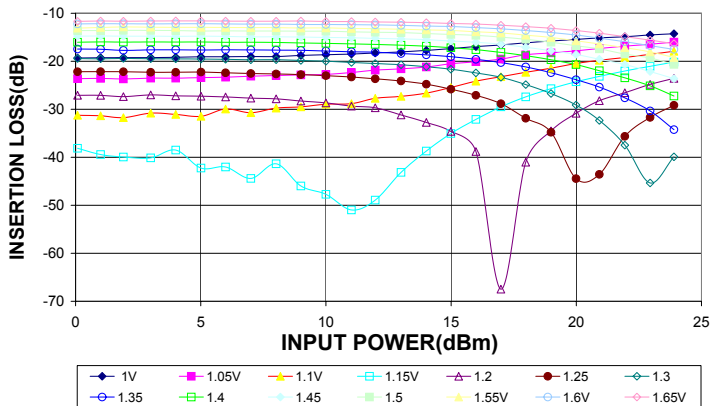


VACC-09+
IP3 Vs. CONTROL VOLTAGE Vs. FREQUENCY @ 25°C

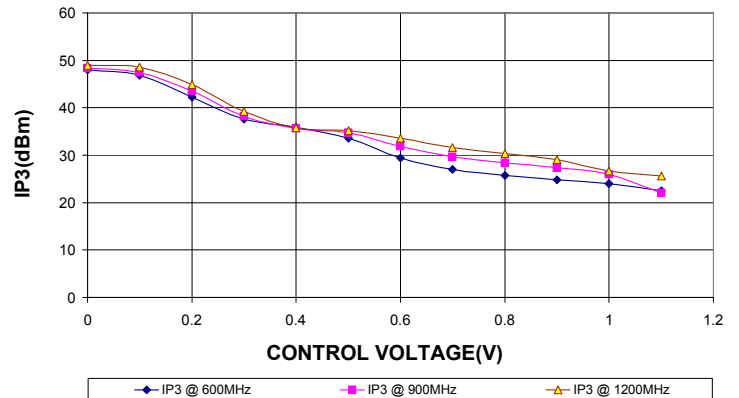


VACC-09+
IP3 Vs. CONTROL VOLTAGE Vs. FREQUENCY @ 85°C

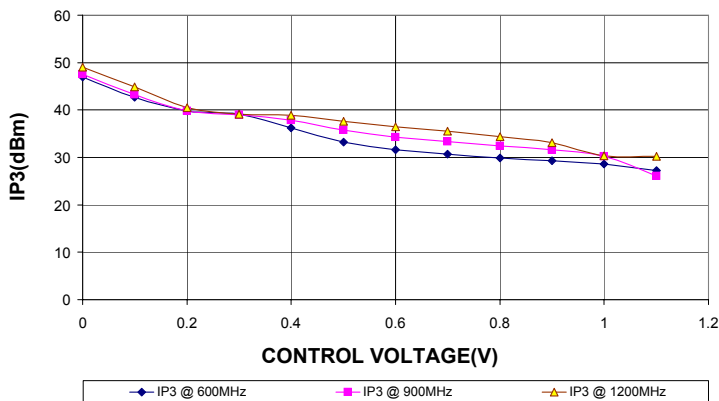


VACC-09+
IP3 Vs. CONTROL VOLTAGE Vs. FREQUENCY @ -45°C

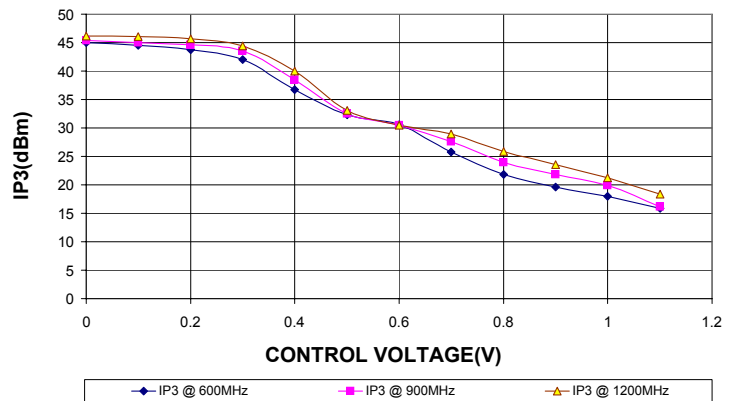

VACC-09+
PHASE SHIFT Vs. FREQUENCY Vs. CONTROL VOLTAGE 600-900MHz (WITH RELATION TO 0V CONTROL VOLTAGE)

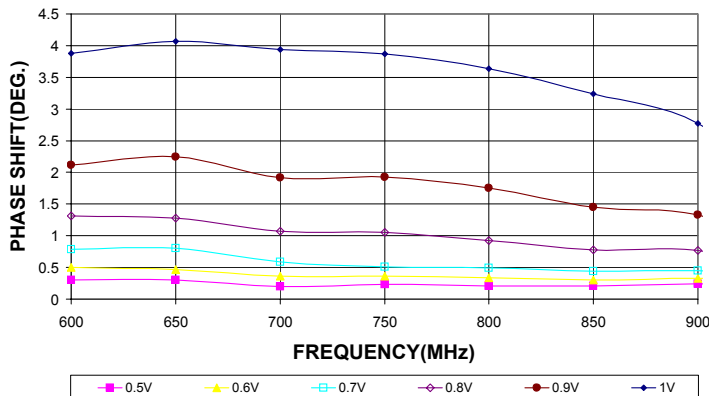

VACC-09+
PHASE SHIFT Vs. FREQUENCY Vs. CONTROL VOLTAGE 900-1200MHz (WITH RELATION TO 0V CONTROL VOLTAGE)

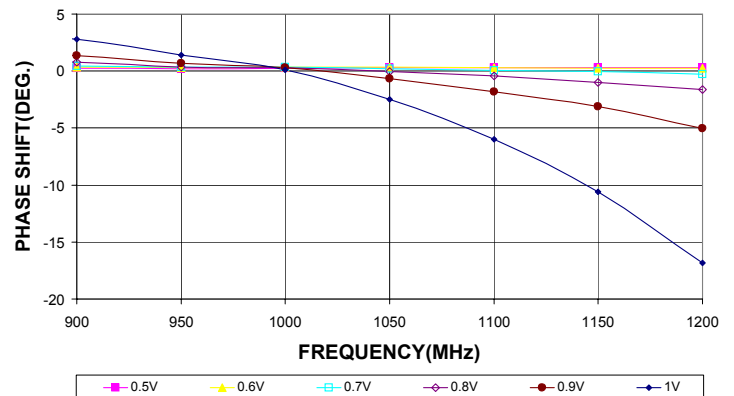

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

