

Coaxial High Pass Filter

ZFHP-3800FF-S+

50Ω

3800 to 6000 MHz

The Big Deal

- Low insertion loss
- Good rejection
- Connectorized package



Generic photo used for illustration purposes only

CASE STYLE: H16

Product Overview

ZFHP-3800FF-S+ is a High pass filter in a fabricated using connectorized package. This filter offers low insertion loss and good rejection. This will find its applications in transmitter and receivers.

Key Features

Feature	Advantages
Low insertion loss	Can be used in high performance applications.
Good rejection	This enables the filter to attenuate spurious signals and reject harmonics till 3GHz.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.

Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial High Pass Filter

50Ω 3800 to 6000 MHz

ZFHP-3800FF-S+



Generic photo used for illustration purposes only

CASE STYLE: H16

Connectors Model
SMA-F / F ZFHP-3800FF-S+
BRACKET (OPTION "B")

Features

- Wide band, 3800 MHz to 6000 MHz
- Low insertion loss
- Connectorized package

Applications

- Sub-harmonic rejection
- Transmitter \ Receiver
- Lab use

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Stop Band	Rejection Loss	DC-F1	20	27.3	-	dB
	VSWR	DC-F1	-	20	-	:1
Pass Band	Insertion Loss	F2-F3	-	1.0	2.0	dB
	VSWR	F2-F3	-	1.5	2.5	:1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	2W max.

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic

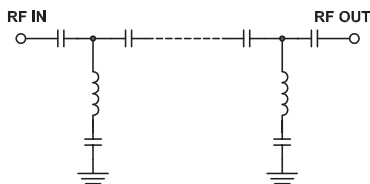

Typical Frequency Response







Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	102.08	6056.68
10	98.21	2112.79
150	85.50	298.21
250	82.76	203.39
750	80.92	126.92
2010	53.87	118.87
2510	49.74	102.23
3000	48.14	51.58
3100	35.70	38.99
3140	30.68	33.47
3150	29.43	32.25
3170	26.95	29.42
3225	20.17	21.00
3380	3.68	2.57
3450	1.58	1.18
3500	1.23	1.17
3750	0.76	1.21
3800	0.74	1.26
5000	0.43	1.01
6000	0.40	1.07

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M171494
ZFHP-3800FF-S+
EDU3355
URJ
200227
Page 2 of 3

Coaxial Connections

PORT - 1	SMA-Female
PORT - 2	SMA-Female

Outline Drawing

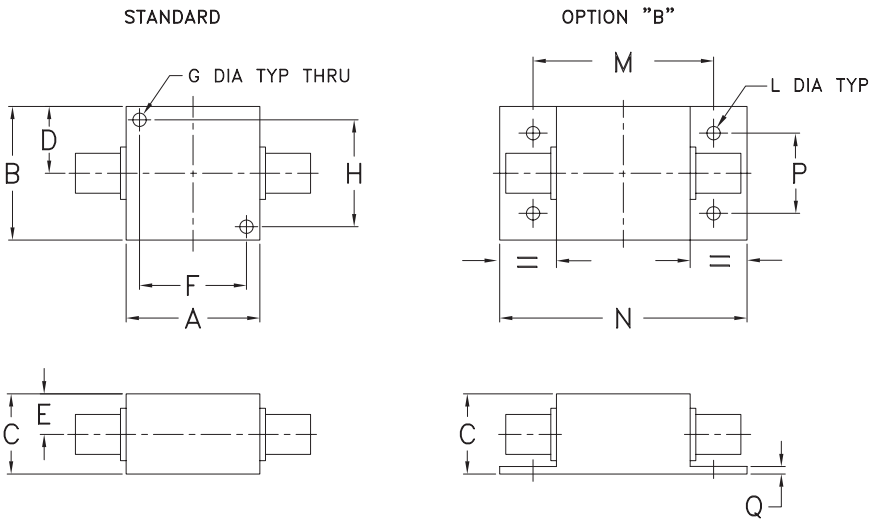

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H
1.25	1.25	.75	.63	.38	1.000	.125	1.000
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40
J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.18	.750	.06	grams
--	--	3.18	42.88	55.37	19.05	1.52	70.0

Note: Please refer to case style drawing for details

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp