

Coaxial Frequency Mixer

Level 13 (LO Power +13 dBm) 2 to 2500 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

LO	1
RF	3
IF	2

Outline Drawing

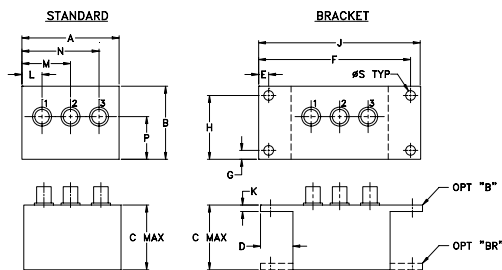

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
1.50	1.13	1.00	.50	.155	2.345	.138	.987
38.10	28.70	25.40	12.70	3.94	59.56	3.51	25.07

J	K	L	M	N	P	S	wt
2.50	.10	.31	.75	1.19	.66	.150	grams
63.50	2.54	7.87	19.05	30.23	16.76	3.81	40.0

Features

- low conversion loss, 6.9 dB typ.
- wideband, 2 to 2500 MHz
- good L-R isolation, 35 dB typ., L-I, 49 dB typ.
- rugged shielded case

Applications

- VHF/UHF
- cellular
- GPS
- PCS
- ISM
- instrumentation

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF f_L - f_U	IF	Mid-Band m				L		M		U		L		M		U	
		$\bar{X}$	σ	Max.	Total Range Max.												
2-2500	2-1000	6.9	0.11	8.5	9.5	33	25	35	25	30	20	42	25	49	25	32	20


1 dB COMP.: +9 dBm typ.

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
m = mid band [$2f_L$ to $f_U/2$]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm
2.00	32.00	5.33	42.0	49.4	1.34	1.46
5.00	35.00	5.25	41.9	49.5	1.35	1.46
10.00	40.00	5.14	41.9	49.6	1.35	1.45
50.00	80.00	5.26	42.2	50.2	1.34	1.48
100.00	130.00	5.33	42.4	50.9	1.37	1.50
208.60	238.60	5.65	43.2	54.4	1.54	1.49
417.09	447.09	5.88	46.8	65.7	2.01	1.46
500.00	530.00	6.03	48.9	61.2	2.25	1.48
625.59	655.59	6.28	50.9	54.1	2.55	1.51
834.08	864.08	6.33	48.9	48.5	2.76	1.73
1000.00	1030.00	6.45	44.2	42.7	2.96	1.81
1042.58	1072.58	6.33	43.1	42.1	2.80	1.77
1251.07	1281.07	6.09	39.5	40.3	2.52	1.66
1459.57	1489.57	6.34	38.0	40.0	2.30	1.58
1500.00	1530.00	6.31	38.2	39.3	2.25	1.53
1668.06	1698.06	6.86	36.5	37.4	2.04	1.56
1876.56	1906.56	6.95	35.2	38.0	1.91	1.59
2000.00	2030.00	6.79	34.2	38.1	1.89	1.61
2085.05	2115.05	6.83	33.3	38.2	1.70	1.61
2293.55	2323.55	7.04	32.5	37.4	1.47	1.65
2470.00	2500.00	7.06	31.8	34.5	1.26	1.68
2500.00	2530.00	7.09	31.2	33.5	1.23	1.70

Electrical Schematic

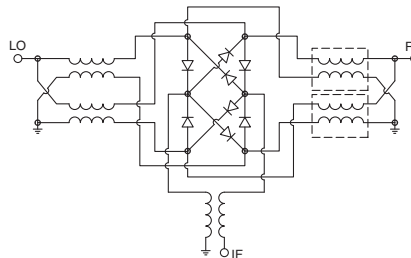


Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

ZLW-186MH



Generic photo used for illustration purposes only







CASE STYLE: M21

Connectors	Model
SMA	ZLW-186MH
BRACKET (OPTION "B")	
BRACKET (OPTION "BR")	

REV. A
M151107
ZLW-186MH
DJ/TD/CP/AM
200804

Performance Charts

ZLW-186MH

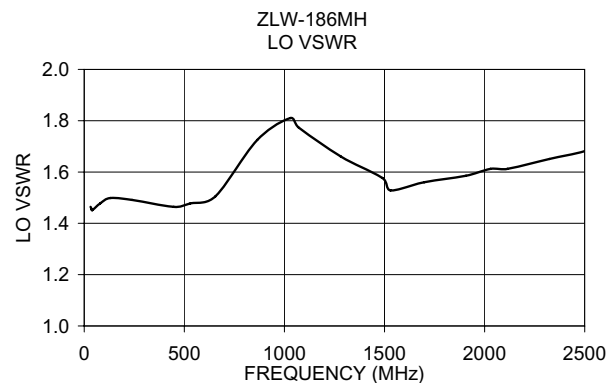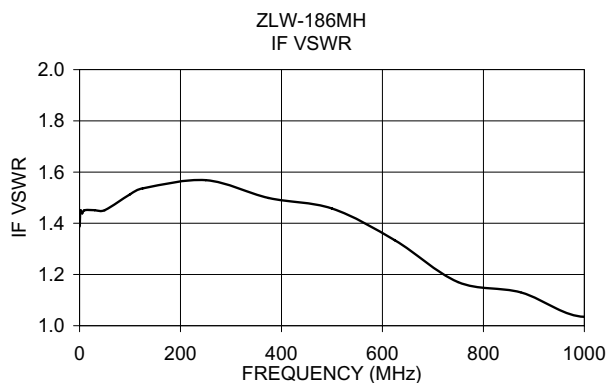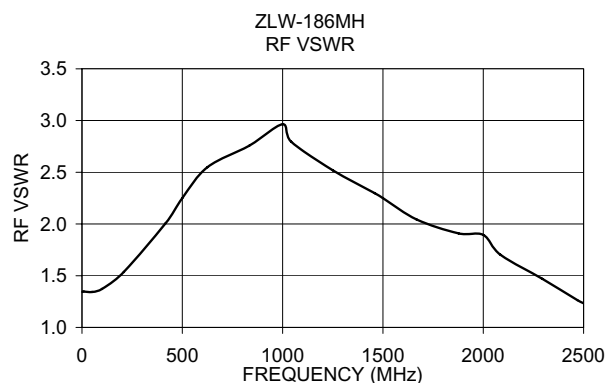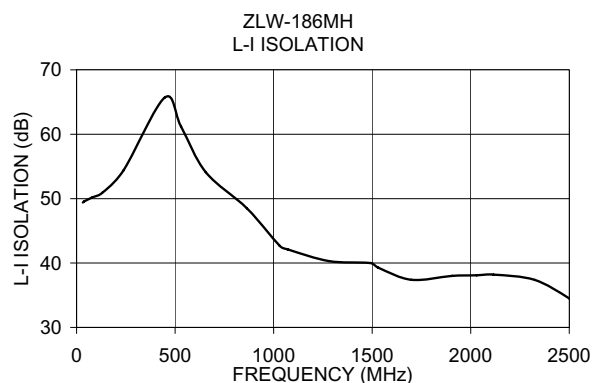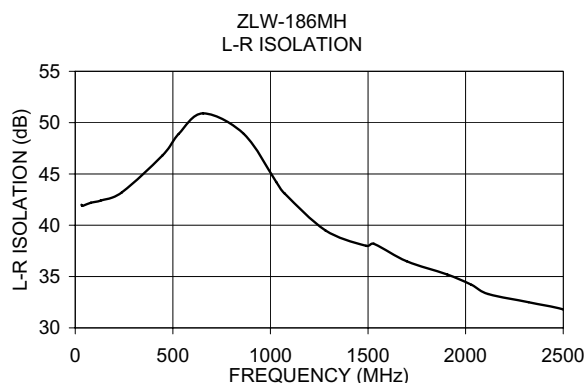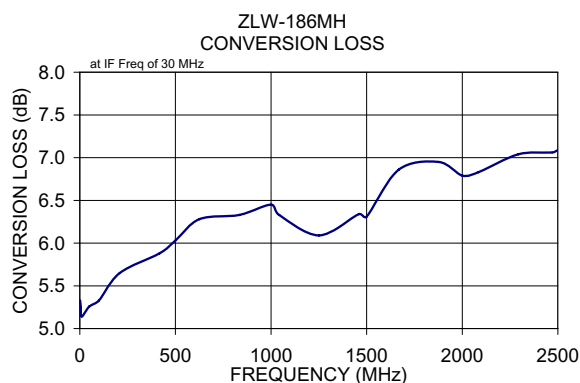

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

