

DC Pass

Power Splitter/Combiner

ZN2PD-44-V+

2 Way-0° 50Ω 10 to 40 GHz

The Big Deal

- Ultra-wideband, 10 to 40 GHz
- Low insertion loss, 1.0 dB
- High Isolation, 21 dB
- 10W power handling
- Low amplitude unbalance, 0.07 dB



CASE STYLE: UU2234

Product Overview

Mini-Circuits' ZN2PD-44-V+ is an ultra-wideband coaxial 2-way 0° splitter/combiner providing coverage from 10 to 40 GHz, supporting a wide range of applications including 5G, Ku-Band, K-Band, and Ka-Band SatCom, microwave point-to-point backhaul, instrumentation and many more. This model provides 10W power handling as a splitter and very low insertion loss across the entire operating frequency range, minimizing power dissipation and delivering excellent signal power transmission from input to output. The ZN2PD-44-V+ comes housed in a rugged aluminum alloy case measuring 1.0 x 1.0 x 0.37" with 2.4mm connectors.

Key Features

Feature	Advantages
Ultra-wideband, 10 to 40 GHz	Extremely wide frequency range supports many broadband applications in a single model.
Low insertion loss, 1.0 dB	The combination of 10W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
High isolation, 21 dB	Minimizes interference between ports.
High power handling: <ul style="list-style-type: none">• 10W as a splitter• 0.5W as a combiner	The ZN2PD-44-V+ is suitable for systems with a wide range of power requirements.
Low amplitude unbalance, 0.07 dB	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
DC Passing, 600mA (300mA each port)	Supports applications where DC power is needed through the RF line.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Power Splitter/Combiner

ZN2PD-44-V+

2 Way-0° 50Ω 10 to 40 GHz



Generic photo used for illustration purposes only

CASE STYLE: UU2234

Connectors	Model
2.4mm Fem	ZN2PD-44-V+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)*	10W max.
Internal Dissipation	0.5W max.

DC Current 600 mA (300mA for each port)
 Permanent damage may occur if any of these limits are exceeded.
 *Assume output match of 2.0:1 or better.

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2

Outline Drawing

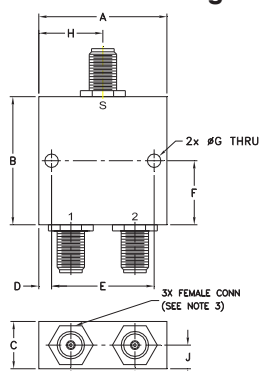


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
1.00	1.00	.370	.101	.800	.500	.106
25.40	25.40	9.40	2.57	20.32	12.70	2.69

H	J	K	L	N	wt
.500	.185	.500	.375	.25	grams
12.70	4.70	12.70	9.53	6.35	55

Electrical Schematic



Features

- wideband, 10 to 40 GHz
- excellent amplitude unbalance, 0.07 dB typ.
- excellent insertion loss 1.0dB typ.
- up to 10W power input as splitter

Applications

- WIMAX
- instruments
- satellite distribution
- WLAN
- LTE
- radar

Electrical Specifications at 25°C




Parameter	Frequency (GHz)	Min.	Typ.	Max.	Unit
Frequency Range		10		40	GHz
Insertion Loss Above 3.0 dB	10 - 18	—	0.6	2.0	dB
	18 - 26.5	—	1.0	2.0	
Isolation	26.5 - 40	—	1.3	2.0	dB
	10 - 40	15	21	—	
Phase Unbalance	10 - 18	—	2.3	6.0	Degree
	18 - 26.5	—	3.9	6.0	
Amplitude Unbalance	26.5 - 40	—	6.7	9.0	dB
	10 - 18	—	0.05	0.6	
VSWR (Port S) ¹	18 - 26.5	—	0.07	0.6	dB
	26.5 - 40	—	0.09	0.6	
VSWR (Port 1-2) ¹	10 - 18	—	1.2	1.8	:1
	18 - 26.5	—	1.3	1.8	
	26.5 - 40	—	1.3	1.8	:1
	10 - 18	—	1.4	1.8	
	18 - 26.5	—	1.3	1.8	:1
	26.5 - 40	—	1.3	1.8	:1

1. Above 37 GHz, VSWR increases to 2.0:1

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
10000	3.56	3.57	0.01	19.06	0.36	1.42	1.39	1.45
12000	3.59	3.54	0.05	20.17	0.06	1.24	1.43	1.39
14000	3.64	3.60	0.05	17.48	0.74	1.19	1.59	1.56
16000	3.62	3.67	0.05	16.26	0.70	1.10	1.48	1.53
18000	3.70	3.73	0.03	17.92	0.27	1.03	1.21	1.22
20000	3.90	3.89	0.01	21.33	0.67	1.37	1.47	1.42
22000	3.91	4.00	0.09	23.44	0.86	1.35	1.12	1.17
24000	3.94	4.01	0.08	27.63	0.29	1.27	1.28	1.22
26000	3.99	4.10	0.11	26.29	0.97	1.34	1.41	1.48
28000	3.92	4.08	0.16	19.97	0.63	1.20	1.28	1.37
30000	4.12	4.02	0.09	16.30	0.25	1.27	1.43	1.32
34000	4.10	4.13	0.03	38.16	0.86	1.14	1.18	1.15
36000	4.24	4.29	0.05	26.27	1.07	1.39	1.33	1.36
38000	4.37	4.44	0.07	35.00	1.30	1.52	1.45	1.53
40000	4.21	4.31	0.10	22.46	0.83	1.16	1.23	1.34

1. Total Loss = Insertion Loss + 3dB splitter loss.

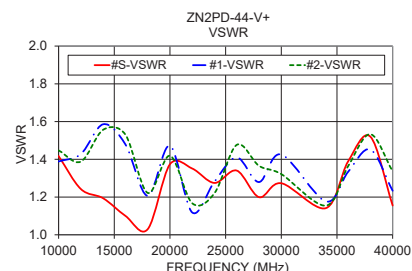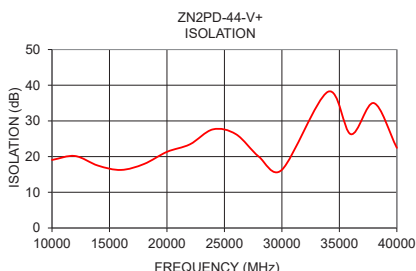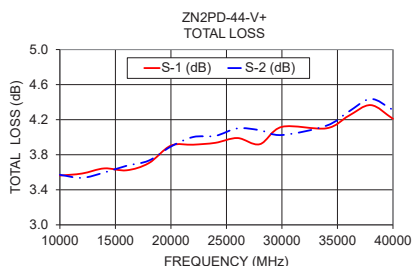

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

