


Cavity Bandpass Filters

50Ω DC to 27.125 GHz

The Big Deal

- Very low insertion loss with excellent power handling
- Very fast roll-off with wide stopband
- Passbands up to 27.125 GHz
- Stopbands up to 37 GHz

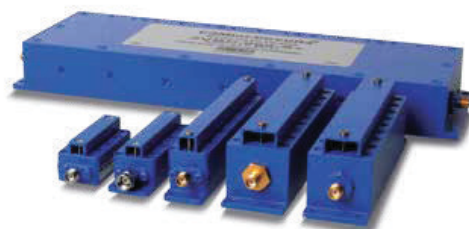

Product Overview

Mini-Circuits' cavity filters are designed by implementing resonant structures with very high Q and are ideal for narrow-band, high-selectivity applications. These designs can provide bandwidths as narrow as 1% with very high selectivity and excellent low noise floor. Low insertion loss combined with excellent power handling makes them well-suited for transmitter and receiver front end. Advanced filter design and construction enables stopband width greater than 3x the center frequency.

Mini-Circuits' cavity filters feature a special protective assembly to prevent accidental de-tuning that would otherwise require expensive replacement or return to factory for re-tuning. Precise machining allows realization of cavity filters with small form factors for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in receiver front end and better power delivery to antenna in transmitter
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stopband	Wide spur free band results in better receiver sensitivity
High power handling	Well suited for transmitter application
Protective assembly	Prevents accidental de-tuning of precisely tuned resonant circuit

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



50Ω 19.2 GHz

ZVBP-19R2G-S+

Generic photo used for illustration purposes only

CASE STYLE: TP2828

Connectors	Model
SMA-F	ZVBP-19R2G-S+


Features

- Low insertion loss, 1.5 dB typical
- Good VSWR, 1.2:1 typical
- Good rejection
- Stopband performance up to 30 GHz


Applications

- Test and measurement
- Mobile communication

Functional Schematic

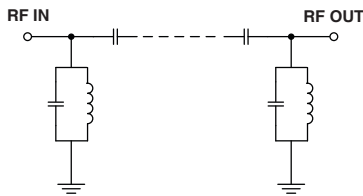

Typical Frequency Response



+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	F1	-	19200	-	dB
	1 dB Bandwidth	F1	-	120	-	MHz
	Insertion Loss	F1	19200	1.5	2.5	dB
	VSWR	F1	19200	1.2	1.7	:1
Stop Band, Lower	Insertion Loss	DC-F2	DC - 18600	35	46	dB
		F2-F3	18600 - 18900	22	27	dB
Stop Band, Upper	Insertion Loss	F4-F5	19500 - 19800	22	27	dB
		F5-F6	19800 - 30000	35	44	dB





Maximum Ratings

Operating Temperature	0°C to 50°C
Storage Temperature	-55°C to 100°C
RF Power Input	2.5 W @ 25°C

Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
100	122.52	333.10	19140	3.65
1000	117.85	160.42	19146	3.52
5000	92.19	139.60	19152	3.40
18600	48.04	100.51	19158	3.31
18890	30.05	63.31	19164	3.25
18900	29.17	60.93	19170	3.18
19100	3.21	2.56	19176	3.16
19140	1.46	1.07	19182	3.12
19180	1.27	1.15	19188	3.13
19200	1.23	1.04	19194	3.12
19220	1.24	1.09	19200	3.10
19260	1.41	1.11	19206	3.12
19300	3.16	2.73	19212	3.12
19430	21.02	43.19	19218	3.14
19500	27.81	68.33	19224	3.15
19535	30.64	67.65	19230	3.17
19800	45.27	99.53	19236	3.22
25000	85.23	67.55	19242	3.28
26500	89.05	77.63	19248	3.36
30000	73.60	31.02	19260	3.57

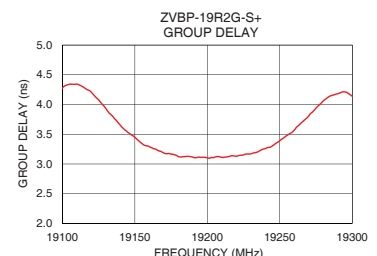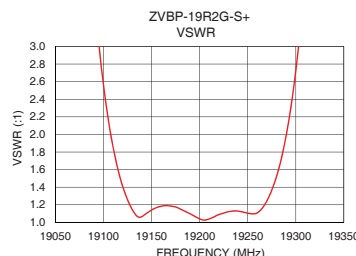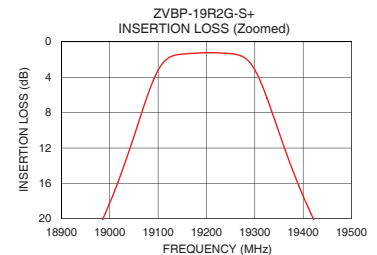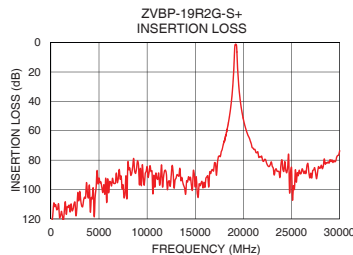

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV.A
ECO-010757
ZVBP-19R2G-S+
EDU3742
URJ
211122
Page 2 of 3

Coaxial Connections

PORT - 1	SMA-FEMALE
PORT - 2	SMA-FEMALE

Outline Drawing

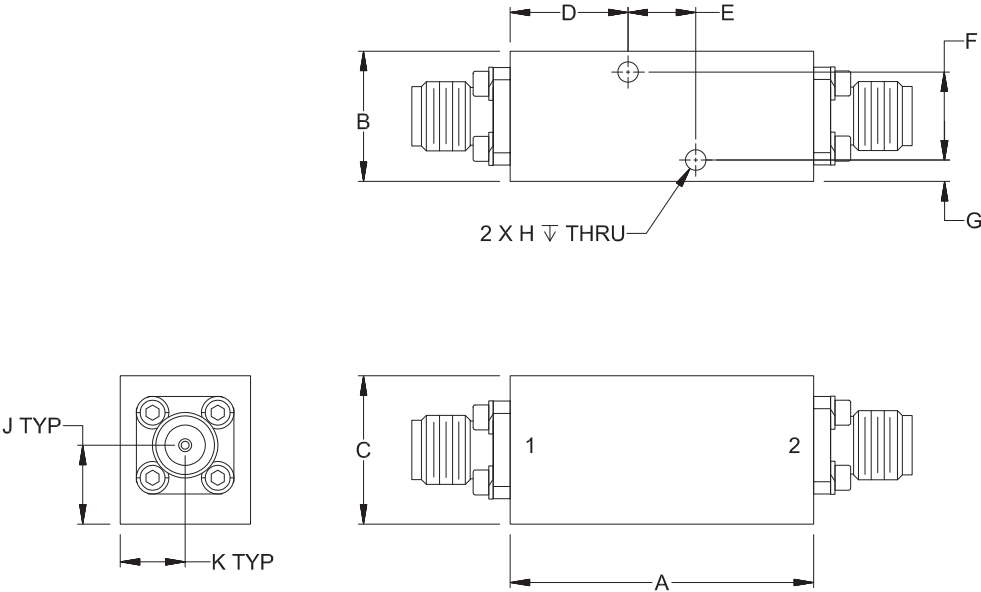

Outline Dimensions (inch mm)

A	B	C	D	E	F
1.17	.50	.57	.45	.260	.338
29.6	12.7	14.5	11.5	6.60	8.59
G	H	J	K	Wt.	
.08	.079	.30	.25	grams	
2.1	2.00	7.7	6.3	35	

Note: Please refer to case style drawing for details

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp