Coaxial **Band Stop Filter**

50Ω 54 to 68 MHz

The Big Deal

- High rejection
- Stopband (54 to 68 MHz)
- Connectorized package



ZX75BS-5468-S+

CASE STYLE: KD1465

Product Overview

The ZX75BS-5468-S+ is a band stop filter built in rugged and compact connectorized package. This filter offers good rejection in stopband. It has repeatable performance across lots and consistent performance across temperature. Useful in broadcast and FM radio systems to minimize spurious signal and avoid system jamming.

Key Features

Feature	Advantages
High rejection	ZX75BS-5468-S+ enables the filter to attenuate spurious signals without compromising pass band signal.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.
Application	Can be used in broadcast and FM systems.

Notes A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Coaxial **Band Stop Filter**

50Ω

54 to 68 MHz

ZX75BS-5468-S+



CASE STYLE: KD1465 Connectors Model ZX75BS-5468-S+ SMA-M\F

Тур.

0.7

1.3

46

16

0.6

1.4

Max.

1.5

1.7

-

1.5

1.8

Unit

dB

:1

dB

:1

dB

:1

Min.

30

-

Features

- · High rejection
- · Fast roll-off
- Connectorized package

Applications

- FM radio
- · Broadcast systems

Functional Schematic

Typical Frequency Response FREQUENCY (MHz)

+RoHS Compliant

for RoHS Compliance methodologies and qualifications

. F5

F2

F3

RF OUT

-0

· Lab use

RF IN

DC

INSERTION LOSS (dB)

F1 F4

Maximum Ratings					
Operating Temperature	-40°C to 85°C				
Storage Temperature	-55°C to 100°C				
RF Power Input	250 mW max.				

Parameter

Pass Band, Lower

Pass Band, Upper

Stop Band

Insertion Loss

Insertion Loss

VSWR

VSWR

VSWR

Rejection

Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C						
Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)				
1	0.02	1.01				
13	0.08	1.13				
26	0.17	1.24				
38	0.34	1.10				
42	0.58	1.06				
45	1.71	1.80				
47	7.10	5.56				
49	18.69	12.52				
51	34.73	16.89				
54	63.46	20.95				
68	47.95	25.19				
73	39.01	20.22				
76	18.68	13.39				
79	6.56	4.51				
81	2.82	2.07				
84	1.41	1.47				
91	0.74	1.24				
94	0.60	1.13				
500	0.22	1.24				
1000	0.43	1.43				

Electrical Specifications at 25°C

Frequency (MHz)

DC - 42

DC - 42

54 - 68

54 - 68

94 - 1000

94 - 1000

F#

DC-F1

DC-F1

F4-F5

F4-F5

F2-F3

F2-F3



A Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document. B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. C. The parts covered by this specification document are subject to Mini-Circuits trandard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

REV.B M171494 ZX75BS-5468-S+ EDU1297 URJ 181227 Page 2 of 3


∭Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Coaxial Connections

•••••••••••••••	
INPUT	SMA-Male
OUTPUT	SMA-Female

Outline Drawing

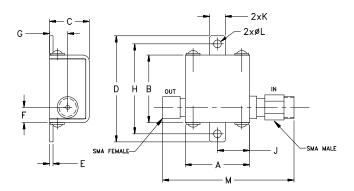

Outline Dimensions (inch)

А	В	С	D	Е	F	G
.74	.75	.46	1.18	.04	.17	.21
18.80	19.05	11.68	29.97	1.02	4.32	5.33
н	J	к	L	М		Wt.
H 1.00	J .37	К . 18	L .09	M 1.51		Wt. grams

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's tandard Terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits