



COAXIAL WIDEBAND

Digital Step Attenuator

ZX76-31R5A-SNS+

50Ω 31.5 dB, 0.5 dB Step DC to 4 GHz

THE BIG DEAL

- 6-bit digital step attenuator
- Serial 3-wire control interface
- Low insertion loss
- Fast attenuation transitions
- No control software or PC required



Generic photo used for illustration purposes only

Model No.	ZX76-31R5A-SNS+
Case Style	HK1149
Connectors	SMA

APPLICATIONS

- Test Setup
- Lab
- Instrumentation

RoHS Compliant

See our website for RoHS Compliance methodologies and qualifications

PRODUCT OVERVIEW

ZX76-31R5A-SNS+ is a 6-bit digital step attenuator with serial control and dual positive & negative supply voltage inputs. Attenuation can be set from 0 to 31.5 dB in 0.5 dB steps, with 0.1 dB typical accuracy. The attenuator is housed in a compact unibody package, with SMA RF connections and a snap-fit control input.

The serial 3-wire serial control interface supports simple integration with a wide range of microcontroller and custom I/O (input / output) control systems. Data is clocked into the internal 6-bit shift register using 5V logic levels and then latched to set the attenuation.

For applications requiring Ethernet / USB control and software support, please review Mini-Circuits' R_DAT series of programmable attenuators at <https://www.minicircuits.com/WebStore/RF-Programmable-Step-Attenuators.html>

KEY FEATURES

Feature	Advantages
Wideband operation, from DC to 4 GHz	Supports a range of applications in communications, satellite and defense.
Excellent RF performance	Low insertion loss and 18 dB typical return loss minimize the impact on overall system performance.
Dual voltage supply inputs	Separate positive & negative supply rails reduce the noise & spurious effects associated with internal negative voltage generators and allow faster attenuation switching (up to 1 MHz).
Serial 3-wire control	Designed for integration with generic control systems at 5V logic levels, no PC or control software required.



COAXIAL WIDEBAND

Digital Step Attenuator

ZX76-31R5A-SNS+

Mini-Circuits

RF ELECTRICAL SPECIFICATIONS, DC - 4 GHz, T_{AMB}=25°C, V_{DD}=+3V, V_{SS}=-3.3V


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Insertion Loss @ 0dB Attenuation Setting	DC - 1000	—	1.4	2.0	dB
	1000 - 2400	—	1.9	2.7	
	2400 - 4000	—	2.5	3.3	
Accuracy @ 0.5 dB Attenuation Setting	DC - 1000	—	± 0.03	± 0.10	dB
	1000 - 2400	—	± 0.05	± 0.15	
	2400 - 4000	—	± 0.07	± 0.20	
Accuracy @ 1 dB Attenuation Setting	DC - 1000	—	± 0.02	± 0.10	dB
	1000 - 2400	—	± 0.05	± 0.15	
	2400 - 4000	—	± 0.10	± 0.25	
Accuracy @ 2 dB Attenuation Setting	DC - 1000	—	± 0.05	± 0.15	dB
	1000 - 2400	—	± 0.15	± 0.25	
	2400 - 4000	—	± 0.15	± 0.35	
Accuracy @ 4 dB Attenuation Setting	DC - 1000	—	± 0.07	± 0.20	dB
	1000 - 2400	—	± 0.15	± 0.25	
	2400 - 4000	—	± 0.23	± 0.50	
Accuracy @ 8 dB Attenuation Setting	DC - 1000	—	± 0.03	± 0.25	dB
	1000 - 2400	—	± 0.15	± 0.50	
	2400 - 4000	—	± 0.60	± 0.80	
Accuracy @ 16 dB Attenuation Setting	DC - 1000	—	± 0.10	± 0.30	dB
	1000 - 2400	—	± 0.15	± 0.70	
	2400 - 4000	—	± 1.10	± 1.45	
Input IP3 (at Min. and Max. Attenuation) ¹	DC -4000	—	+52	—	dBm
Input Power @ 0.2dB Compression (at Min. and Max. Attenuation) ¹	DC -4000	—	+24	—	
Input Operating Power	0.010 - 50	—	—	See figure 1	dBm
	50 - 4000	—	—	+24	
Return Loss	DC - 1000	12.5	21	—	dB
	1000 - 2400	11.5	18	—	
	2400 - 4000	10.0	14	—	

1. Input IP3 and 1dB compression degrade below 1 MHz. Input power not to exceed max operating specification for continuous operation.

DC ELECTRICAL SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Units
Positive Supply Voltage, V _{DD}	+2.7	+3	+3.6	V
Positive Supply Current, I _{DD}	—	—	200	µA
Negative Supply Voltage, V _{SS}	-3.6	-3.3	-3.2	V
Negative Supply Current, I _{SS}	—	16	40	µA
Control Input Low	-0.3	—	+0.3x V _{DD}	V
Control Input High	+0.7x V _{DD}	—	+5	V
Control Current	—	—	400	µA

FIGURE 1: Max Input Operating Power vs Frequency

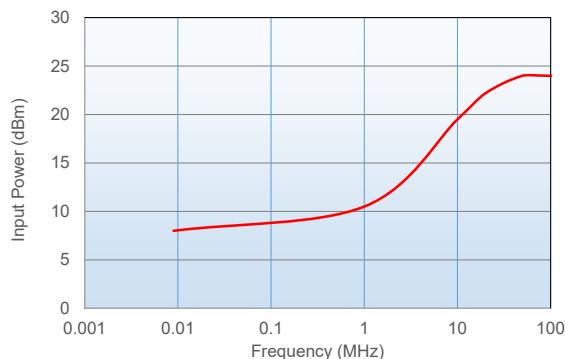

SWITCHING SPECIFICATIONS

Parameter	Min.	Typ.	Max.	Units
Switching Speed, 50% Control to 0.5dB of Attenuation Value	—	1	—	µsec
Switching Control Frequency	—	1	—	MHz

Mini-Circuits®



COAXIAL WIDEBAND

Digital Step Attenuator

ZX76-31R5A-SNS+

Mini-Circuits

ABSOLUTE MAXIMUM RATINGS


Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
V _{DD}	-0.3V Min., +5.5V Max.
V _{SS}	-3.6V Min., +0.3V Max.
Voltage on any control input	-0.3V Min., +6V Max.
ESD, HBM	500V
ESD, MM	100V
Input Power	+30dBm

Permanent damage may occur if any of these limits are exceeded.


Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.

PIN CONFIGURATION

TOP VIEW

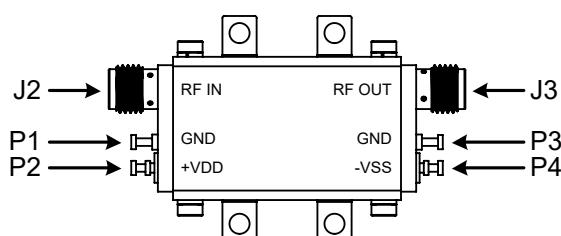

SIDE VIEW

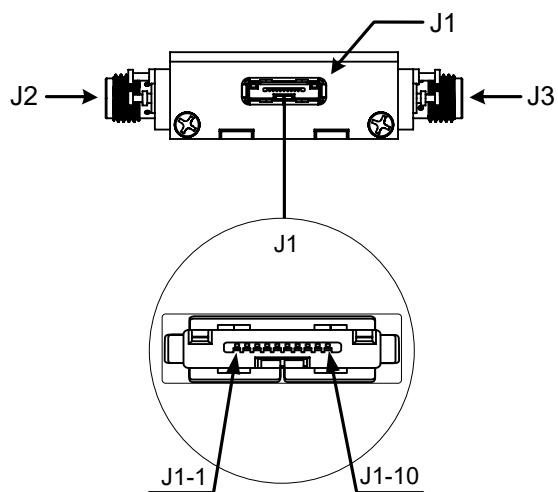

PIN DESCRIPTION

Function	Pin Number	Description
N/C	J1-1	Not Connected
GND	J1-2	Ground connection
LE	J1-3	Latch Enable Input
N/C	J1-4	Not Connected
GND	J1-5	Ground connection
N/C	J1-6	Not Connected
Clock	J1-7	Serial Interface clock Input
GND	J1-8	Ground connection
Data	J1-9	Serial Interface data Input
N/C	J1-10	Not Connected
RF in	J2	RF in port ²
RF out	J3	RF out port ²
GND	P1	Ground connection
V _{DD}	P2	Positive Supply Voltage
GND	P3	Ground connection
V _{SS}	P4	Negative Supply Voltage

² Both RF ports must be held at 0VDC or DC blocked with an external series capacitor.

Note : See page 5 for details on accessory cable for use with the model.

Mini-Circuits®



COAXIAL WIDEBAND

Digital Step Attenuator

ZX76-31R5A-SNS+

Mini-Circuits

SIMPLIFIED SCHEMATIC

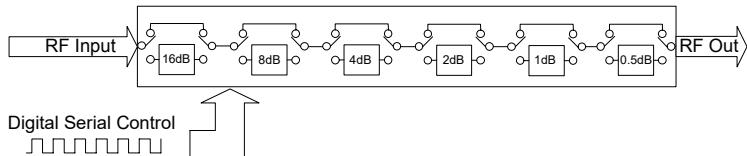


TABLE 1. TRUTH TABLE

Attenuation State	C16	C8	C4	C2	C1	C0.5
Reference	0	0	0	0	0	0
0.5 (dB)	0	0	0	0	0	1
1 (dB)	0	0	0	0	1	0
2 (dB)	0	0	0	1	0	0
4 (dB)	0	0	1	0	0	0
8 (dB)	0	1	0	0	0	0
16 (dB)	1	0	0	0	0	0
31.5 (dB)	1	1	1	1	1	1

Note: Not all 64 possible combinations of C0.5 - C16 are shown in table

The ZX76-31R5A-SNS+ serial interface consists of 6 control bits that select the desired attenuation state, as shown in Table 1: Truth Table.

The serial interface is a 6-bit serial in, parallel-out shift register buffered by a transparent latch.

It is controlled by three CMOS-compatible signals: Data, Clock, and Latch Enable (LE). The Data and Clock inputs allow data to be serially entered into the shift register, a process that is independent of the state of the LE input. The shift register triggers on the rising edge of the clock signal.

The LE input controls the latch. When LE is HIGH, the latch is transparent and the contents of the serial shift register control the attenuator. When LE is brought LOW, data in the shift register is latched.


The shift register should be loaded while LE is held LOW to prevent the attenuator value from changing as data is entered. The LE input should then be toggled HIGH and brought LOW again, latching the new data.

The timing for this operation is defined by Figure 2 (Serial Interface Timing Diagram) and Table 2 (Serial Interface AC Characteristics).

TABLE 2. SERIAL INTERFACE AC CHARACTERISTICS

Symbol	Parameter	Min.	Max.	Units
f_{clk}	Serial data clock frequency ³		10	MHz
t_{clkH}	Serial clock HIGH time	30		ns
t_{clkL}	Serial clock LOW time	30		ns
t_{LESUP}	LE set-up time after last clock rising edge	10		ns
t_{LEPW}	LE minimum pulse width	30		ns
t_{SDSUP}	Serial data set-up rising edge	10		ns
t_{SDHLD}	Serial data hold time after clock rising edge	10		ns

FIGURE 2: SERIAL INTERFACE TIMING DIAGRAM

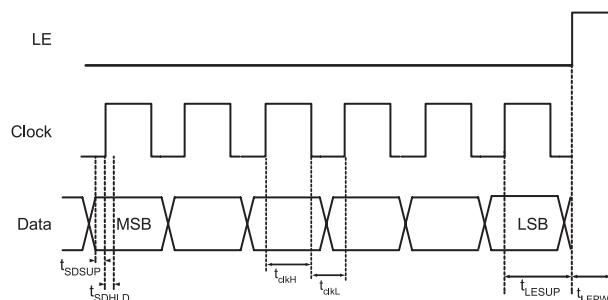

POWER-UP STATE

When the attenuator powers up and LE is logic low, the nominal attenuation is set on 0 dB. When LE is logic high, the nominal attenuation selected upon control logics (see Table 1).

Mini-Circuits®




COAXIAL WIDEBAND

Digital Step Attenuator

ZX76-31R5A-SNS+

Mini-Circuits

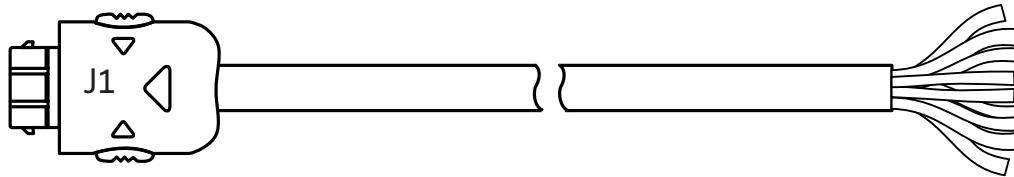ZX76-WS+ CONTROL CABLE**RECOMMENDED ACCESSORIES**

An optional ZX76-WS+ is a shielded cable on one end and a connector on the other end designed to mate to the ZX76-31R5A-SNS+. These bare wires enable the customer to assemble their own cable as required to interface with the ZX76-31R5A-SNS+ (cable length is 4.9ft/ 1.5meters).

ZX76-WS+ WIRING INFORMATION

J1 Pin Number	Function	Description	Wire Color
J1-2	GND	Ground Connection	Black
J1-3	LE	Latch Enable Input	Green
J1-5	GND	Ground Connection	Blue
J1-7	Clock	Serial Interface Clock Input	Red
J1-8	GND	Ground Connection	Orange
J1-9	Data	Serial Interface Data Input	White

Note: Other pins not connected. Cable shield connected to case ground.

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 5 OF 8



COAXIAL WIDEBAND

Digital Step Attenuator

ZX76-31R5A-SNS+

Mini-Circuits

TYPICAL PERFORMANCE DATA (AT 25°C)

Freq. [MHz]	I.Loss [dB]	Attenuation relative to Insertion Loss						
		[dB]						
		@ Attenuation setting [dB]						
		0.5	1	2	4	8	16	31.5
0.1	-1.21	0.46	-0.01	-0.01	0.00	0.03	0.15	0.18
1	-1.23	0.47	-0.01	-0.01	0.00	0.03	0.15	0.19
10	-1.24	0.47	-0.01	-0.01	0.00	0.03	0.15	0.17
100	-1.27	0.47	-0.01	-0.01	0.00	0.03	0.15	0.17
200	-1.31	0.47	-0.01	-0.01	0.00	0.03	0.15	0.18
400	-1.38	0.47	-0.01	0.00	0.01	0.03	0.15	0.19
500	-1.42	0.47	-0.01	0.00	0.01	0.03	0.15	0.19
700	-1.49	0.47	0.00	0.00	0.01	0.03	0.15	0.20
800	-1.54	0.47	0.00	0.00	0.01	0.03	0.14	0.19
1000	-1.61	0.47	0.00	0.01	0.02	0.02	0.13	0.18
1100	-1.65	0.47	0.00	0.01	0.02	0.02	0.12	0.18
1300	-1.73	0.47	0.00	0.01	0.02	0.01	0.11	0.17
1450	-1.79	0.47	0.00	0.01	0.01	0.00	0.09	0.15
1750	-1.92	0.47	0.00	0.01	0.02	-0.01	0.07	0.10
1900	-1.98	0.48	0.00	0.01	0.02	-0.02	0.05	0.07
2200	-2.11	0.47	0.00	0.01	0.03	-0.03	0.03	0.02
2350	-2.18	0.47	0.00	0.01	0.03	-0.03	0.01	-0.03
2650	-2.29	0.46	-0.01	0.00	0.03	-0.06	-0.06	-0.16
2800	-2.32	0.46	-0.01	-0.01	0.02	-0.10	-0.12	-0.26
3100	-2.39	0.46	-0.03	-0.03	-0.01	-0.19	-0.28	-0.44
3250	-2.41	0.46	-0.04	-0.05	-0.04	-0.26	-0.39	-0.53
3550	-2.44	0.46	-0.06	-0.10	-0.11	-0.43	-0.64	-0.52
3700	-2.45	0.46	-0.07	-0.12	-0.15	-0.52	-0.72	-0.11
3900	-2.48	0.46	-0.08	-0.14	-0.19	-0.63	-0.85	-0.14
4000	-2.52	0.45	-0.08	-0.15	-0.20	-0.69	-0.95	-0.31

Freq. [MHz]	Return Loss In							Return Loss Out								
	[dB]							[dB]								
	@ Attenuation setting [dB]							@ Attenuation setting [dB]								
	0	0.5	1	2	4	8	16	31.5	0	0.5	1	2	4	8		
0.1	-18.79	-20.34	-21.87	-19.97	-21.00	-24.11	-43.54	-39.26	-18.63	-19.24	-19.43	-24.48	-28.24	-32.18	-28.59	-36.22
1	-18.66	-20.23	-21.75	-19.81	-20.79	-23.77	-41.88	-39.24	-18.51	-19.13	-19.30	-24.34	-27.99	-31.68	-28.14	-36.21
10	-18.54	-20.10	-21.62	-19.72	-20.73	-23.73	-41.56	-39.38	-18.39	-19.02	-19.21	-24.20	-27.86	-31.61	-28.16	-36.19
100	-18.57	-20.12	-21.63	-19.74	-20.74	-23.72	-40.92	-39.47	-18.52	-19.15	-19.33	-24.35	-28.02	-31.76	-28.24	-36.06
200	-18.59	-20.15	-21.66	-19.77	-20.78	-23.77	-40.26	-38.91	-18.49	-19.12	-19.30	-24.30	-27.94	-31.64	-28.17	-36.14
400	-18.58	-20.12	-21.61	-19.73	-20.70	-23.60	-37.38	-38.75	-18.42	-19.03	-19.22	-24.10	-27.58	-30.96	-27.69	-37.19
500	-18.59	-20.12	-21.60	-19.72	-20.68	-23.53	-36.24	-38.34	-18.53	-19.14	-19.32	-24.22	-27.69	-30.98	-27.66	-37.29
700	-18.54	-20.05	-21.51	-19.64	-20.58	-23.35	-34.55	-37.77	-18.51	-19.11	-19.28	-24.10	-27.46	-30.44	-27.27	-37.66
800	-18.53	-20.03	-21.49	-19.63	-20.56	-23.28	-33.81	-37.22	-18.50	-19.10	-19.27	-24.06	-27.37	-30.24	-27.11	-37.93
1000	-18.60	-20.08	-21.51	-19.63	-20.49	-23.06	-31.95	-35.67	-18.49	-19.07	-19.23	-23.92	-27.04	-29.56	-26.56	-38.81
1100	-18.45	-19.92	-21.32	-19.48	-20.32	-22.83	-31.20	-35.37	-18.47	-19.06	-19.21	-23.87	-26.96	-29.35	-26.39	-38.97
1300	-18.21	-19.58	-20.87	-19.05	-19.74	-21.82	-27.94	-32.70	-18.43	-18.96	-19.05	-23.40	-25.97	-27.52	-24.83	-41.98
1450	-18.16	-19.44	-20.63	-18.72	-19.19	-20.87	-25.73	-30.69	-18.39	-18.82	-18.82	-22.80	-24.76	-25.59	-23.12	-38.06
1750	-18.02	-19.10	-20.04	-17.94	-18.07	-19.27	-23.06	-27.09	-18.59	-18.74	-18.53	-21.92	-22.78	-23.15	-21.20	-27.90
1900	-18.03	-18.96	-19.75	-17.70	-17.77	-19.05	-23.03	-26.34	-18.33	-18.34	-18.09	-21.00	-21.52	-22.19	-20.81	-24.79
2200	-16.33	-16.85	-17.27	-16.23	-16.59	-18.37	-22.81	-23.02	-17.11	-16.99	-16.87	-18.66	-19.11	-21.03	-21.57	-20.69
2350	-15.74	-16.13	-16.45	-15.95	-16.61	-18.97	-24.23	-22.36	-16.08	-16.01	-16.02	-17.33	-17.92	-20.53	-22.69	-19.17
2650	-14.58	-14.86	-15.07	-15.20	-16.20	-19.23	-24.51	-20.38	-14.64	-14.69	-14.85	-15.74	-16.50	-19.69	-23.85	-17.56
2800	-14.41	-14.63	-14.78	-15.16	-16.30	-19.58	-24.24	-19.59	-14.20	-14.29	-14.49	-15.28	-16.08	-19.41	-24.03	-17.03
3100	-14.14	-14.30	-14.36	-15.11	-16.45	-19.79	-22.16	-18.09	-13.82	-13.96	-14.21	-14.75	-15.51	-18.80	-22.90	-15.96
3250	-14.11	-14.22	-14.22	-15.13	-16.46	-19.38	-20.38	-17.07	-13.91	-14.08	-14.34	-14.75	-15.46	-18.62	-21.91	-15.59
3550	-14.01	-13.95	-13.79	-14.86	-15.83	-17.18	-16.65	-14.76	-14.85	-15.02	-15.28	-15.26	-15.68	-18.10	-19.33	-14.83
3700	-13.95	-13.81	-13.59	-14.62	-15.33	-15.99	-15.19	-13.77	-15.81	-15.95	-16.20	-15.76	-15.94	-17.75	-18.06	-14.53
3900	-13.72	-13.53	-13.24	-14.13	-14.52	-14.60	-13.64	-12.57	-17.04	-17.14	-17.36	-16.18	-15.99	-16.83	-16.21	-14.05
4000	-13.77	-13.60	-13.30	-14.15	-14.51	-14.49	-13.43	-12.37	-17.39	-17.45	-17.64	-16.09	-15.76	-16.18	-15.31	-13.73

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 6 OF 8








COAXIAL WIDEBAND

Digital Step Attenuator

ZX76-31R5A-SNS+

Mini-Circuits

TYPICAL PERFORMANCE CURVES (AT 25°C)

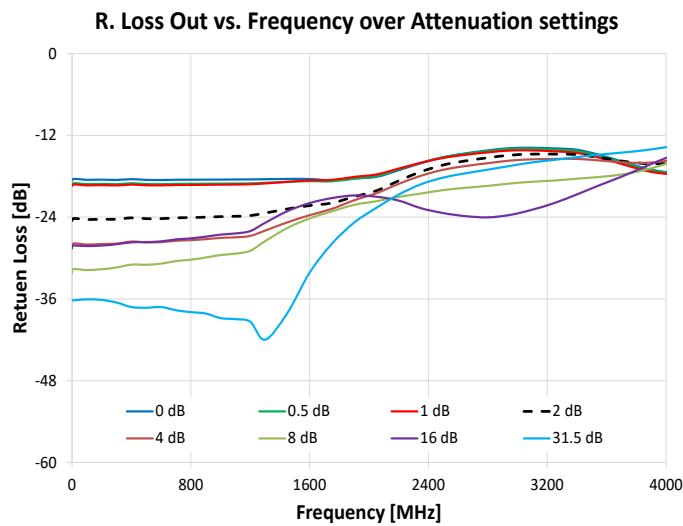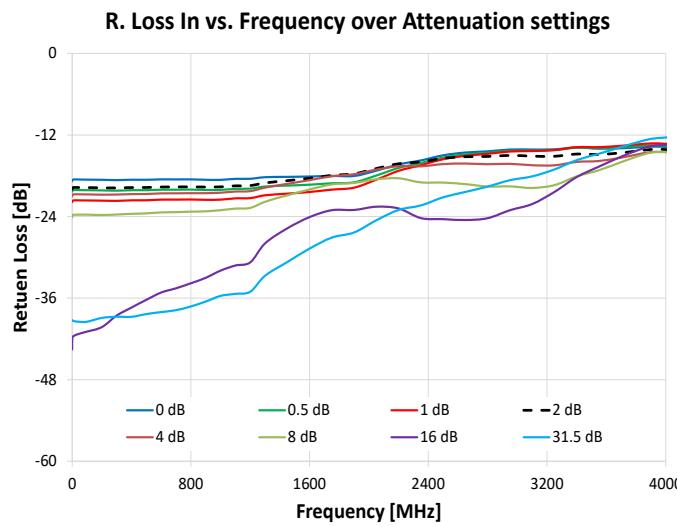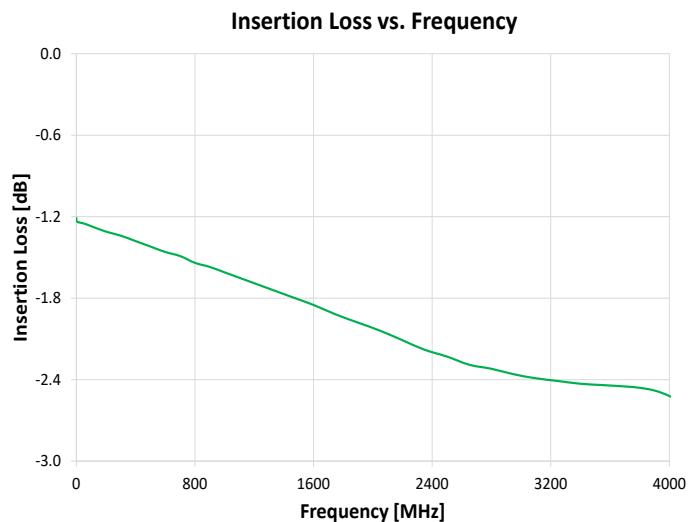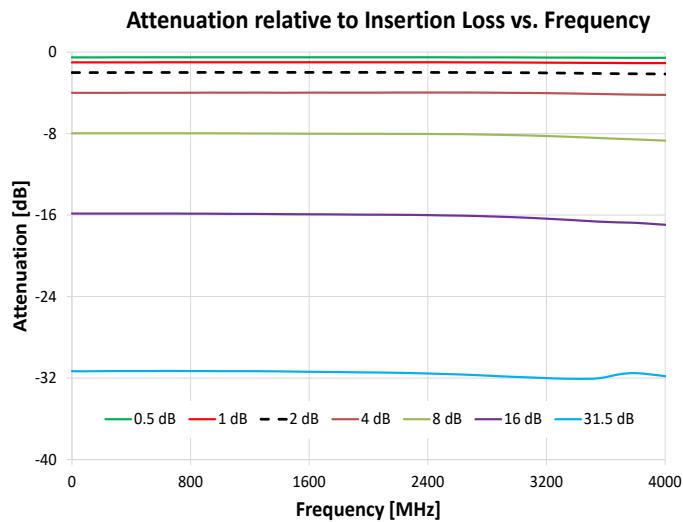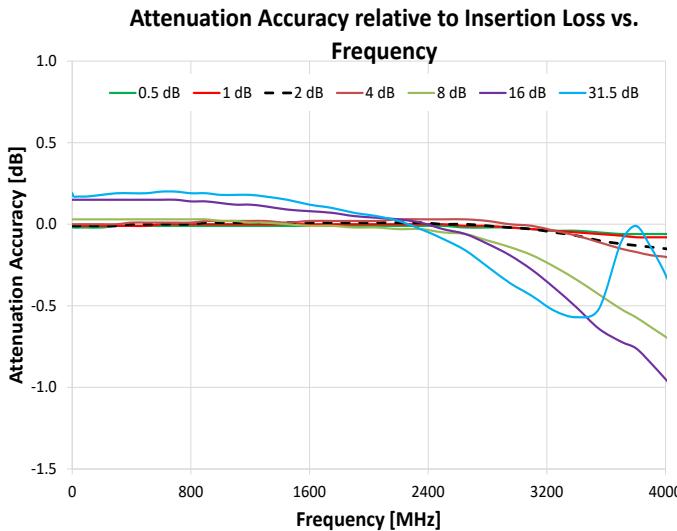



COAXIAL WIDEBAND


Digital Step Attenuator

ZX76-31R5A-SNS+

Mini-Circuits®

ORDERING INFORMATION

Model	Description
ZX76-31R5A-SNS+	Digital attenuator - Serial interface, Dual Voltage (Positive & Negative)

Recommended Accessories	Part No.	Description
	ZX76-WS+	4.9 ft. (1.5M) Control Cable

ADDITIONAL DETAILED TECHNICAL INFORMATION

Performance Data	Data Table
	Swept Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	HK1149
Environmental Rating	ENV28T14

Additional information is available on our dash board. To access this information [click here](#)**NOTES**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

 **Mini-Circuits®**