

Coaxial Reflectionless High Pass Filter

ZXHF Series

50Ω

DC to 30 GHz



The Big Deal

- Patented design eliminates in band spurs
- Pass band cut-off up to 18.3 GHz
- Stop band up to 30 GHz

Product Overview

Mini-Circuits' ZXHF Series reflectionless filters employs a novel filter topology which absorbs and terminates stop band signals internally rather than reflecting them back to the source. Reflectionless filters eliminate stopband reflections, allowing them to be paired with sensitive devices and used in applications that otherwise require circuits such as isolation amplifiers or attenuators. This is developed in a new broadband, stable connectorized package.

Key Features

Feature	Advantages
Easy integration with sensitive reflective components, e.g. mixers, multipliers	Reflectionless filters absorb unwanted signals, preventing reflections back to the source. This reduces generation of additional unwanted signals without the need for extra components like attenuators, improving system dynamic range.
Cascadable	Reflectionless filters can be cascaded in multiple sections to provide sharper and higher attenuation, while also preventing any standing waves that could affect pass band signals.
Excellent stability over temperature	Ensures minimal variation in electrical performance across temperature.
Operating temperature up to 105°C	Suitable for operation close to high power components.
Broadband connectorized package	The connectorized package works well even in high frequencies and easy to interface with other devices. This is well suited for test setups.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



High Pass Filter

ZXHF-K1832+

50Ω 18.3 to 30 GHz



Features

- Match to 50Ω in the stop band, eliminates undesired reflections
- Cascadable
- Temperature stable, up to 105°C
- Protected by US Patent No. 8,392,495

Generic photo used for illustration purposes only

CASE STYLE: UK3042

Connectors Model
2.92mm-F ZXHF-K1832+


Electrical Specifications at 25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Stop Band	Rejection	DC-F1	DC - 9000	-	6.7	-	dB
		F1-F2	9000 - 14600	11	14.0	-	dB
	Freq. Cut-Off	F3	17500	-	3.6	-	dB
	VSWR	DC-F1	DC - 9000	-	2.8	-	:1
		F1-F2	9000 - 14600	-	1.7	-	:1
Pass Band	Insertion Loss	F4-F5	18300 - 25000	-	3.3	-	dB
		F5-F6	25000 - 30000	-	2.5	-	dB
	VSWR	F4-F5	18300 - 25000	-	1.7	-	:1
		F5-F6	25000 - 30000	-	1.7	-	:1

Applications

- KA Band Satellite Transmission
- Microwave Radio
- Military and Space

Functional Schematic



Absolute Maximum Ratings³

Parameter	Ratings
Operating Temperature	-55°C to +105°C
Storage Temperature	-55°C to +105°C
RF Power Input, Passband (F4-F6) ¹	0.32W at 25°C
RF Power Input, Stopband (DC-F4) ²	0.09W at 25°C

¹ Passband rating derates linearly to 0.16W at 105°C ambient

² Stopband rating derates linearly to 0.04W at 105°C ambient

³ Permanent damage may occur if any of these limits are exceeded


ESD rating

Human body model (HBM): Class 1A(250 to <500 V) in accordance with ANSI/ESD STM 5.1-2001

Typical Performance Data at 25°C



Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
25	6.80	2.66
100	6.77	2.65
500	7.17	2.63
1000	8.10	2.51
1400	9.25	2.39
2000	11.46	2.21
5000	22.03	1.63
9000	32.55	1.39
10000	21.38	1.36
14000	18.49	1.64
14600	15.28	1.59
16000	6.39	1.05
17500	3.49	1.55
18300	2.76	1.57
20000	1.93	1.23
21000	1.76	1.15
22000	1.76	1.35
25000	1.69	1.21
28000	2.06	1.61
30000	2.34	1.73

Typical Frequency Response

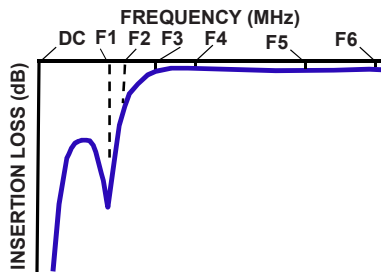

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

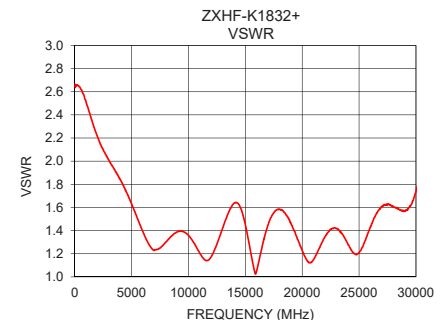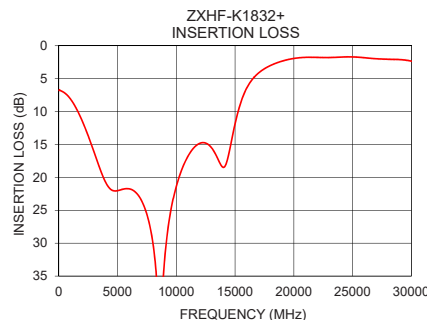

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
ECO-005038
ZXHF-K1832+
EDU3827
URJ
201127
Page 2 of 3

Coaxial Connections

PORT - 1	2.92mm-Female
PORT - 2	2.92mm-Female

Outline Drawing

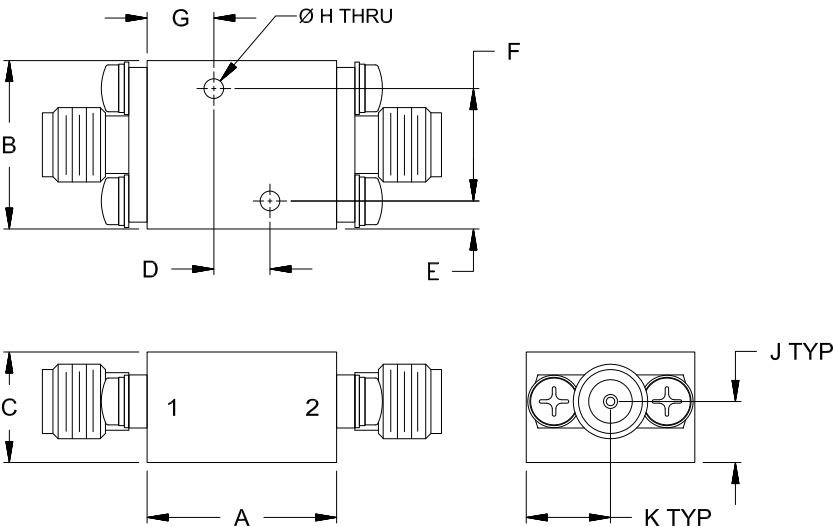

Outline Dimensions (inch
mm)

A	B	C	D	E	F
.68	.60	.39	.200	.10	.400
17.1	15.2	10.0	5.08	2.5	10.16
G	H	J	K		Wt.
.24	.070	.22	.30		grams
6.0	1.78	5.5	7.6		24

Note: Please refer to case style drawing for details

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp