



# Instrumentation Test Cable

## E67-1M-EMEM+

50Ω 1M DC to 67 GHz Low Loss 1.85mm-Male

### THE BIG DEAL

- Ultra-wideband operation, DC to 67 GHz
- Stainless steel 1.85mm connectors for long mating-cycle life
- Low Insertion Loss and excellent Return Loss
- Very flexible with small bend radius 10mm



Generic photo used for illustration purposes only

<b>Model No.</b>	E67-1M-EMEM+
<b>Case Style</b>	UM3060-3.28
<b>Connectors</b>	1.85mm-Male

### APPLICATIONS

- Point to point or rack to rack connections
- High volume production test stations
- Research & development labs
- Environmental & temperature test chambers
- Replacement for OEM test port cables
- Field RF testing
- Cellular infrastructure site testing

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

#### Product Guarantee

Mini-Circuits® will repair or replace your test cable at its option if the connector attachment fails within six months of shipment. This guarantee excludes cable or connector interface damage from misuse or abuse.

### PRODUCT OVERVIEW

Mini-Circuits' E67 Model Series are ultra-wideband precision rugged instrumentation cables specially designed for use with 67 GHz VNA equipment in test environments. The cables provide excellent VSWR and very low insertion loss over its entire frequency range. 1.85mm straight to 1.85mm connector configuration provides direct connection from the ports of a 67 GHz VNA to 1.85mm connectorized devices without the need for adapters. These cables are available in a variety of lengths.

### KEY FEATURES

Feature	Advantages
DC-67 GHz operation designed for use with Vector Network Analyzers (VNA)	Covers a wide range of test applications; rugged 1.85mm connector interfaces directly with VNA without the need for an adapter for improved VSWR performance and lower cost.
Stainless Steel Connectors	Stainless Steel Connectors maintains integrity of the cable-connector interface improving the reliability and extending life of use.
Anti-Torque Component	Nut component feature on connector used to fit a torque wrench to minimize stress on connectors and prevent breakage

REV. B  
ECO-019694  
E67-1M-EMEM+  
MCL NY  
231018





# Instrumentation Test Cable

## E67-1M-EMEM+

Mini-Circuits

50Ω 1M DC to 67 GHz Low Loss 1.85mm-Male

### ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC	—	50	GHz
Length		1			M
Insertion Loss	DC - 26.5	—	2.4	4.3	dB
	26.5 - 40	—	4.2	5.5	
	40 - 50	—	5.0	6.4	
	50 - 67	—	5.9	6.9	
Return Loss	DC - 26.5	19	33.9	—	dB
	26.5 - 40	17	32	—	
	40 - 50	16	27	—	
	50 - 67	16	25.9	—	

### ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to +85°C
Storage Temperature	-55°C to +85°C
Power Handling at 25°C, Sea Level	57W at 1 GHz
	22W at 6 GHz
	12W at 18 GHz
	10W at 26.6 GHz
	8W at 40 GHz
	7W at 50 GHz
	6W at 67 GHz

Permanent damage may occur if any of these limits are exceeded.






# Instrumentation Test Cable


## E67-1M-EMEM+

50Ω 1M DC to 67 GHz Low Loss 1.85mm-Male

### CABLE CONSTRUCTION

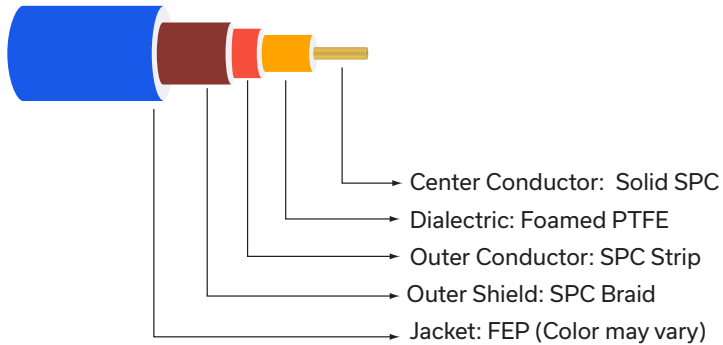

### OUTLINE DRAWING

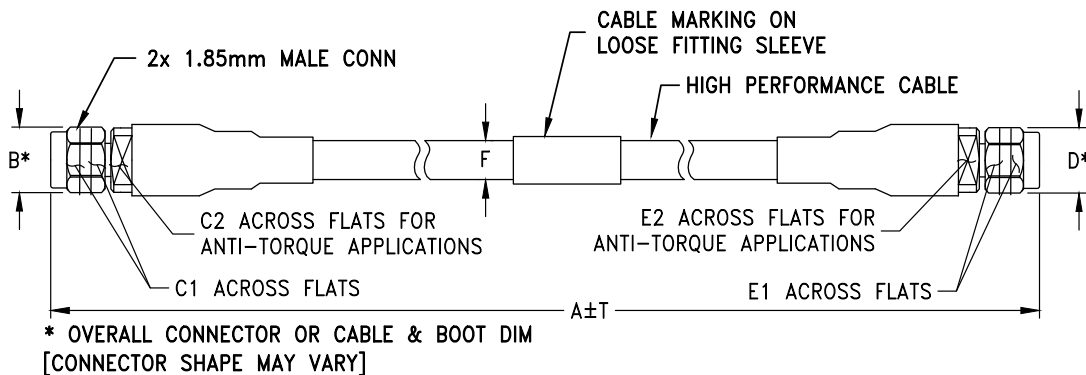

### OUTLINE DIMENSIONS (Inch/mm)

A		B	C1	C2	D	E1	E2	F	T		wt
Feet	Meters								Inch	MM	grams
3.28	1.00	0.36	.315	0.256	0.36	.315	.276	.100	0.08	2.00	42
		9.14	8.00	6.50	9.14	8.00	6.50	2.54			





# Instrumentation Test Cable


## E67-1M-EMEM+

Mini-Circuits



50Ω 1M DC to 67 GHz Low Loss 1.85mm-Male

### TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	
		1.85mm-Male	1.8mm-Male
50	0.16	38.42	39.05
100	0.21	50.67	46.90
1000	0.64	38.82	37.88
5000	1.46	42.62	40.01
10000	2.14	25.96	26.07
20000	3.08	40.25	33.00
30000	3.90	35.44	31.41
40000	4.61	26.62	28.11
45000	4.96	23.27	22.07
50000	5.27	33.37	24.89
55000	5.59	24.81	25.22
60000	5.91	26.14	27.68
67000	6.43	24.01	26.39

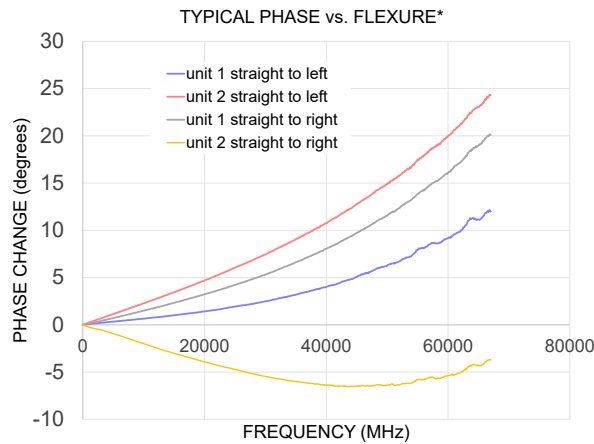

\* Typical phase change over flexure performed on E67-1M-EMEM+ by wrapping cable 360° around 4" radii mandrels referenced to normalized straight position.  
 \*\* Setup is flipped and measurement is repeated.

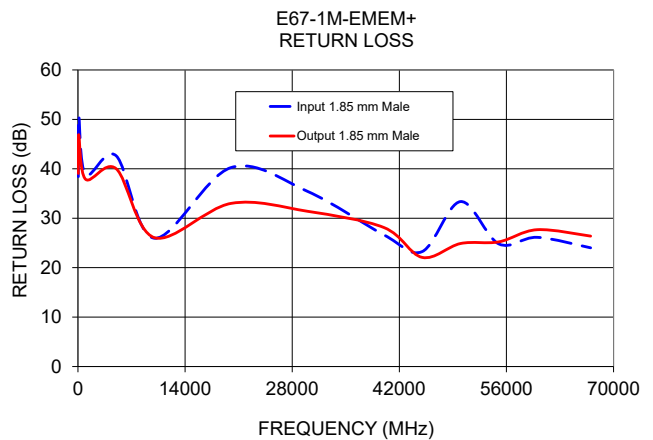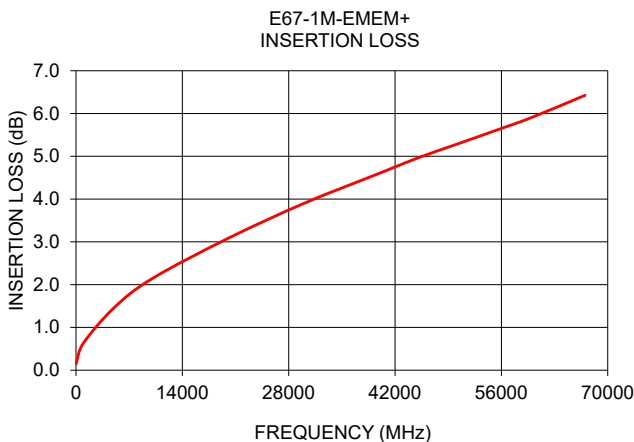



Mini-Circuits



# Instrumentation Test Cable **E67-1M-EMEM+**

50Ω 1M DC to 67 GHz Low Loss 1.85mm-Male

## PROPER CABLE CONNECTION USING ANTI-TORQUE NUT



Mini-Circuits E67 Series interconnect cables are constructed with an anti-torque nut adjacent to the connector coupling nut. When used properly, this feature prevents possible damage to the cable due to torquing and twisting when tightening the cable connector.

To properly tighten the cable connector:

1) The cable connector includes a coupling nut which rotates to fasten the connector, and an anti-torque nut, which is fixed to prevent the cable from twisting during connection.

2) To properly tighten the cable, use a standard 1/4-inch open end wrench to brace the anti-torque nut.

3) Using a 5/16-inch open end wrench, rotate the coupling nut clockwise to tighten the cable connector.

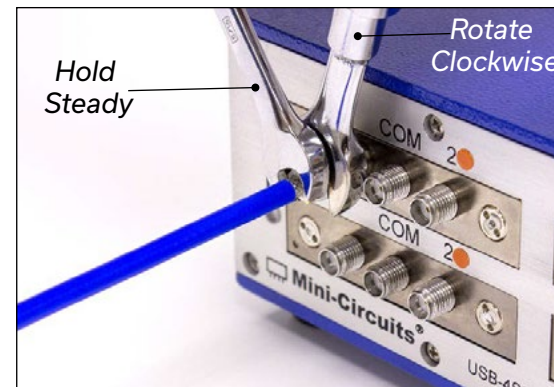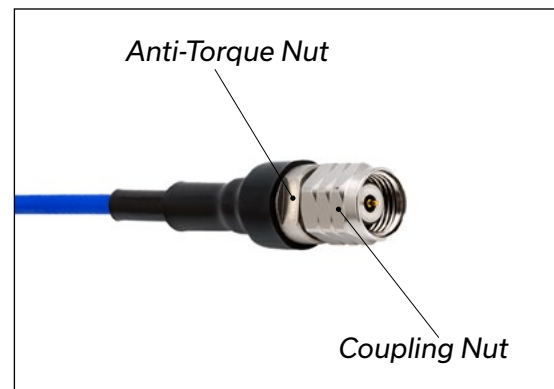

**NOTE:** Mini-Circuits recommends using a 5/16-inch open end wrench calibrated to 8 inch-pounds maximum torque to prevent damage due to over-torquing the connector.

### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

