

Cavity Bandpass Filters

50Ω DC to 27.125 GHz



The Big Deal

- Very low insertion loss with excellent power handling
- Very fast roll-off with wide stopband
- Passbands up to 27.125 GHz
- Stopbands up to 37 GHz

Product Overview

Mini-Circuits' cavity filters are designed by implementing resonant structures with very high Q and are ideal for narrow-band, high-selectivity applications. These designs can provide bandwidths as narrow as 1% with very high selectivity and excellent low noise floor. Low insertion loss combined with excellent power handling makes them well-suited for transmitter and receiver front end. Advanced filter design and construction enables stopband width greater than 3x the center frequency.

Mini-Circuits' cavity filters feature a special protective assembly to prevent accidental de-tuning that would otherwise require expensive replacement or return to factory for re-tuning. Precise machining allows realization of cavity filters with small form factors for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

Key Features

| Feature | Advantages |
|---------------------|---|
| Low insertion loss | Low signal loss results in better SNR in receiver front end and better power delivery to antenna in transmitter |
| Fast roll-off | Higher selectivity results in better adjacent channel rejection and dynamic range |
| Wide stopband | Wide spur free band results in better receiver sensitivity |
| High power handling | Well suited for transmitter application |
| Protective assembly | Prevents accidental de-tuning of precisely tuned resonant circuit |

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Bandpass Filter

ZVBP-7558R7-S+

50Ω 7517.5 to 7600 MHz



Generic photo used for illustration purposes only

CASE STYLE: WE3301

Connectors SMA-F Model ZVBP-7558R7-S+

Features

- Low insertion loss, 1.2 dB typ.
- Good VSWR, 1.2:1 typ.
- High rejection, 90dB typ.

Applications

- Satellite communication
- Mobile communication
- Test and measurement

Electrical Specifications at 25°C


| Parameter | F# | Frequency (MHz) | Min. | Typ. | Max. | Unit |
|------------------|------------------|-----------------|---------------|--------|------|------|
| Pass Band | Center Frequency | Fc | - | 7558.7 | - | MHz |
| | Insertion Loss | F1-F2 | 7517.5 - 7600 | 1.2 | 1.6 | dB |
| | VSWR | F1-F2 | 7517.5 - 7600 | 1.18 | 1.43 | :1 |
| Stop Band, Lower | Insertion Loss | DC-F3 | DC - 6882 | 85 | 91 | dB |
| | | F4-F5 | 7000 - 7400 | 40 | 49 | dB |
| Stop Band, Upper | Insertion Loss | F6-F7 | 7720 - 10600 | 40 | 50 | dB |
| | | F7-F8 | 10600 - 15000 | 85 | 93 | dB |

Maximum Ratings


| | |
|-----------------------|-----------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| RF Power Input | 10W max. @ 25°C |

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic

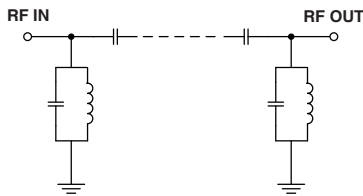

Typical Frequency Response







Typical Performance Data at 25°C

| Frequency (MHz) | Insertion Loss (dB) | VSWR (:1) | Frequency (MHz) | Group Delay (nsec) |
|-----------------|---------------------|-----------|-----------------|--------------------|
| 100.0 | 106.86 | 1411.19 | 7517.5 | 12.11 |
| 500.0 | 108.64 | 164.77 | 7521.0 | 11.48 |
| 5000.0 | 113.45 | 86.38 | 7525.0 | 10.99 |
| 6882.0 | 98.43 | 72.16 | 7529.0 | 10.63 |
| 7000.0 | 99.97 | 73.16 | 7533.0 | 10.32 |
| 7368.0 | 57.02 | 71.44 | 7537.5 | 10.03 |
| 7367.5 | 57.13 | 71.46 | 7541.0 | 9.84 |
| 7400.0 | 48.92 | 68.24 | 7545.0 | 9.68 |
| 7452.0 | 30.82 | 48.69 | 7549.0 | 9.57 |
| 7473.0 | 20.15 | 30.38 | 7553.0 | 9.51 |
| 7500.0 | 3.09 | 2.61 | 7558.7 | 9.48 |
| 7517.5 | 1.16 | 1.19 | 7561.0 | 9.48 |
| 7540.0 | 0.99 | 1.13 | 7565.0 | 9.50 |
| 7558.7 | 0.95 | 1.13 | 7569.5 | 9.54 |
| 7580.0 | 0.97 | 1.13 | 7573.0 | 9.60 |
| 7600.0 | 1.10 | 1.16 | 7577.0 | 9.71 |
| 7650.0 | 21.16 | 24.21 | 7581.0 | 9.87 |
| 7720.0 | 49.47 | 47.58 | 7585.0 | 10.08 |
| 10600.0 | 103.39 | 109.10 | 7589.0 | 10.35 |
| 15000.0 | 108.05 | 69.63 | 7600.0 | 11.36 |

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

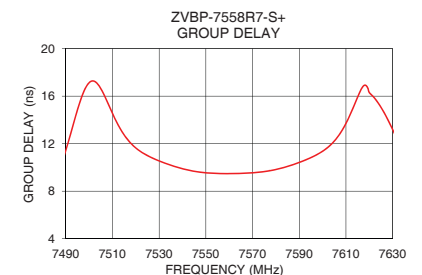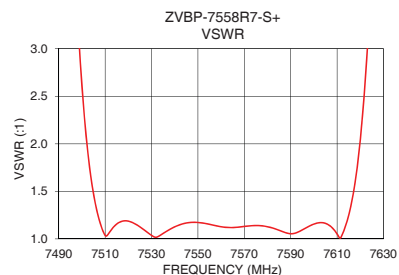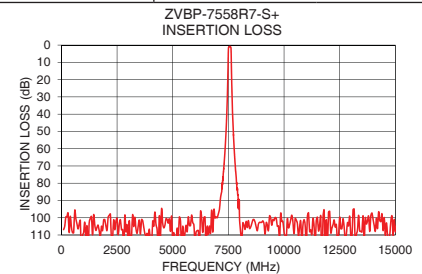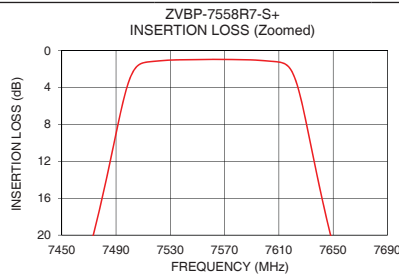

Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Connections

| | |
|--------|------------|
| PORT-1 | SMA-Female |
| PORT-2 | SMA-Female |

Outline Drawing

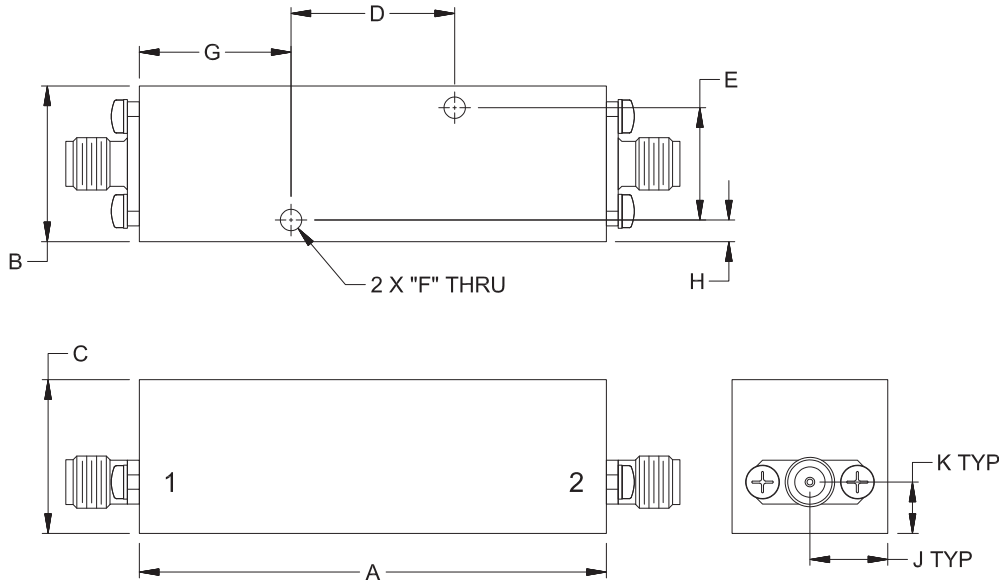

Outline Dimensions ($\frac{\text{inch}}{\text{mm}}$)

| A | B | C | D | E | F |
|------|------|------|-------|-------|------|
| 2.37 | .79 | .78 | .830 | .570 | .110 |
| 60.2 | 20.1 | 19.8 | 21.08 | 14.48 | 2.79 |
| G | H | J | K | Wt. | |
| .77 | .11 | .40 | .26 | grams | |
| 19.6 | 2.8 | 10.0 | 6.6 | 60 | |

Note: Please refer to case style drawing for details

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

