

REPLACEMENT PART REFERENCE GUIDE:

AN-60-060


ORIGINAL PART: MAR-8SM+, MSA-0886 (Avagotech)

REPLACEMENT PART_{a,b}: MAR-8ASM+

This replacement part has been judged by Mini-Circuits Engineering as a suitable replacement part_{a,b}


APPLICATION CIRCUITS

ORIGINAL PART:
MAR-8SM+ & MSA-0886 (Avagotech)

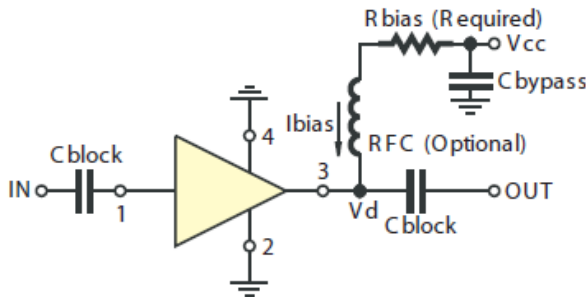

R BIAS	
Vcc	"1%" Res. Values (ohms) for Optimum Biasing
10	63.4
11	90.9
12	115
13	143
14	169
15	200

REPLACEMENT PART:
MAR-8ASM+

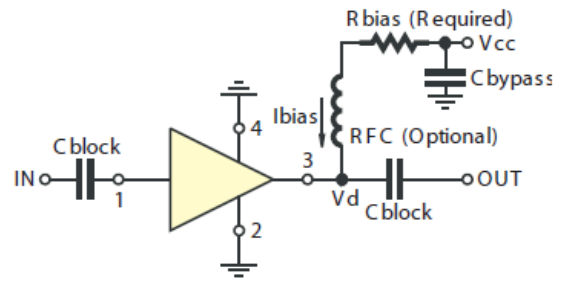

R BIAS ¹	
Vcc	Bias Resistor Value ²
7	88.7
8	118
9	143
10	174
11	200
12	226
13	255
14	280
15	309

¹ When being used as a substitute for MAR-8SM or MSA-0886, the bias resistor values must be changed to the values in this table.
² 1% Resistor values (ohms) for optimum bias.

CONCLUSION:

- 1) **FORM-FIT COMPATIBLE:** Same Circuit and PCB Layout, change in Bias Resistor Value per table above
- 2) If Rbias>250 ohms, RFC can be eliminated.
- 3) Original part MAR-8SM+/MSA-0886 has poor Input and output return loss, 4 to 14 dB vs. MAR-8ASM+ has 12-16 dB typically over 50-1000 MHz. May affect external matching elements.
- 4) Typical Performance Comparison_{a,b}:







Performance	Condition(GHz)	MAR-8SM+/MSA-0886	MAR-8ASM+
Gain (dB)	1.0	22.5	25
Noise Figure (dB)	1.0	3.3	3.1
Pout 1dB (dBm)	1.0	12.5	12.5
Output IP3 (dBm)	1.0	27.0	25
Input Return Loss (dB)	DC-1	See Page 2	15.5
Output Return Loss (dB)	DC-1	See Page 2	11.0
Operating Voltage (V)	---	See table above	See table above
Operating Current (mA)	---	36	36
Status	---	Qualified, last time buy	Qualified, in production

Notes:
a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.
b. The MSA-1105 part number is used for identification and comparison purposes only.

REPLACEMENT PART REFERENCE GUIDE:

AN-60-060

COMPARISON PERFORMANCE CURVES:

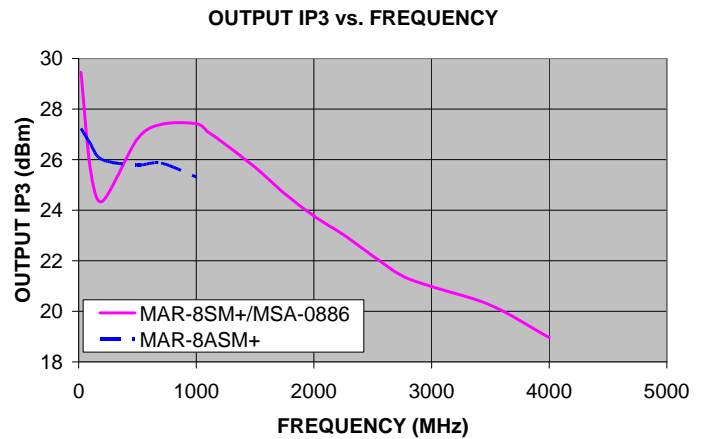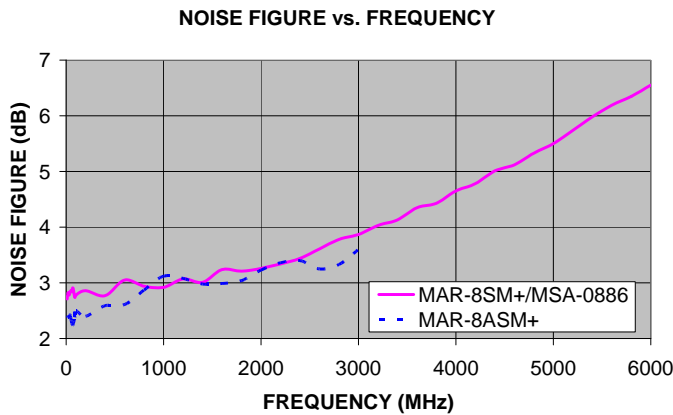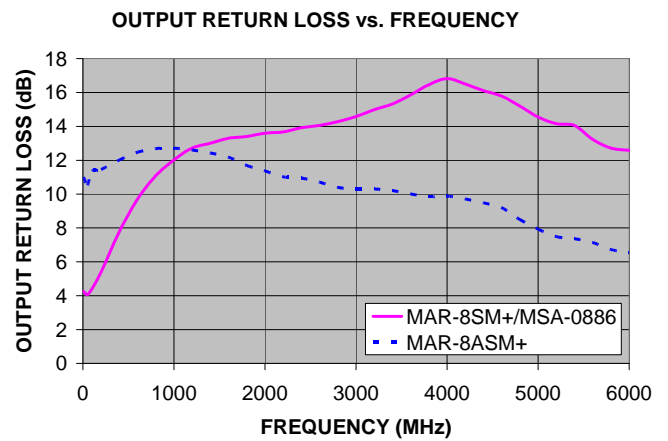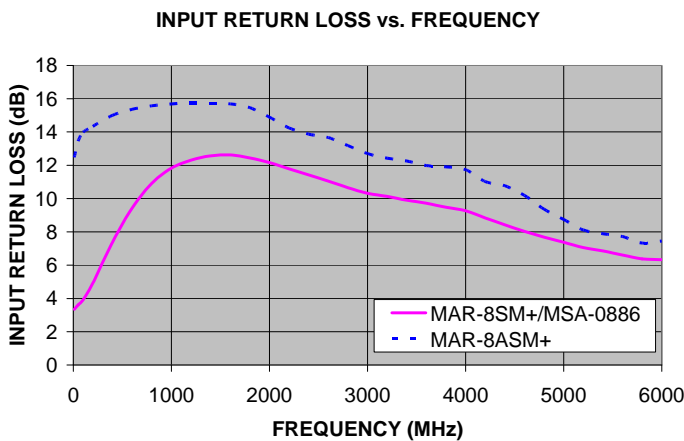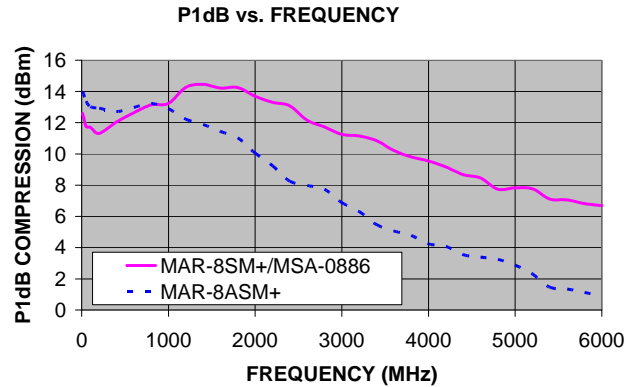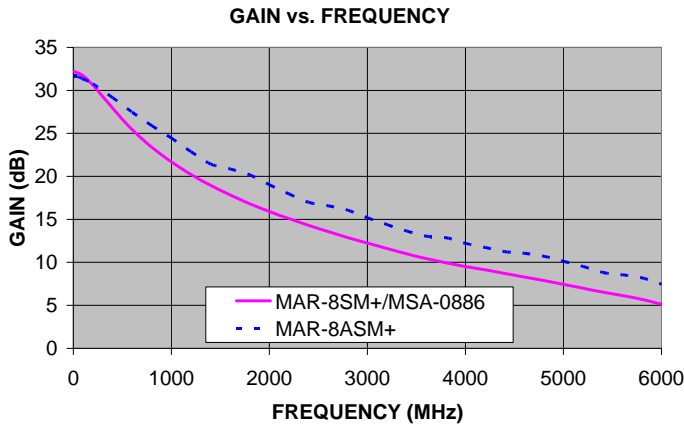

- Notes:
- Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.
 - The MSA-1105 part number is used for identification and comparison purposes only.

REPLACEMENT PART REFERENCE GUIDE:

AN-60-060

IMPORTANT NOTICE

© 2015 Mini-Circuits

This document is provided as an accommodation to Mini-Circuits customers in connection with Mini-Circuits parts only. In that regard, this document is for informational and guideline purposes only. Mini-Circuits assumes no responsibility for errors or omissions in this document or for any information contained herein.

Mini-Circuits may change this document or the Mini-Circuits parts referenced herein (collectively, the "Materials") from time to time, without notice. Mini-Circuits makes no commitment to update or correct any of the Materials, and Mini-Circuits shall have no responsibility whatsoever on account of any updates or corrections to the Materials or Mini-Circuits' failure to do so.

Mini-Circuits customers are solely responsible for the products, systems, and applications in which Mini-Circuits parts are incorporated or used. In that regard, customers are responsible for consulting with their own engineers and other appropriate professionals who are familiar with the specific products and systems into which Mini-Circuits' parts are to be incorporated or used so that the proper selection, installation/integration, use and safeguards are made. Accordingly, Mini-Circuits assumes no liability therefor.

In addition, your use of this document and the information contained herein is subject to Mini-Circuits' standard terms of use, which are available at Mini-Circuits' website at www.minicircuits.com/homepage/terms_of_use.html.

Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation d/b/a Mini-Circuits. All other third-party trademarks are the property of their respective owners. A reference to any third-party trademark does not constitute or imply any endorsement, affiliation, sponsorship, or recommendation: (i) by Mini-Circuits of such third-party's products, services, processes, or other information; or (ii) by any such third-party of Mini-Circuits or its products, services, processes, or other information.