



# Evaluation Board and Circuit

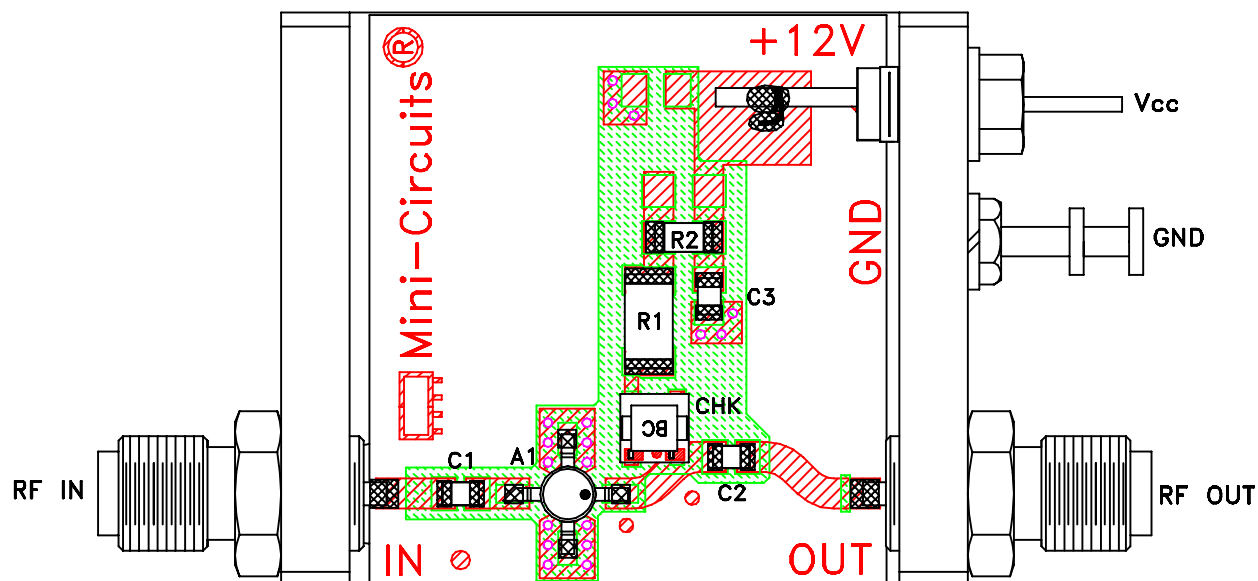

TB-412-11B+

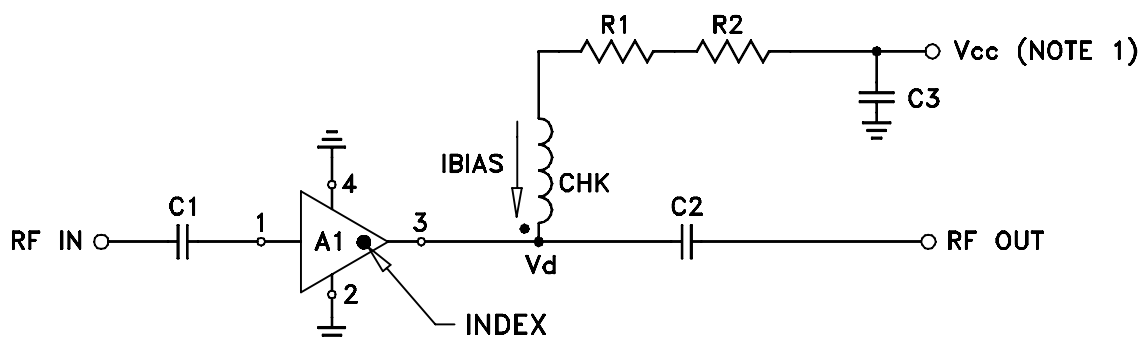

| COMPONENT   | VALUE                  |
|-------------|------------------------|
| A1          | MAV-11BSM(+)           |
| C1 (NOTE 4) | 2400 pF                |
| C2 (NOTE 4) | 2400 pF                |
| C3 (bypass) | 0.1 uF                 |
| R1          | 100 Ohms, 0.75W        |
| R2          | 8.25 Ohms, 0.25W       |
| CHK         | Mini-Circuits TCCH-80+ |

Schematic Diagram

## NOTE:

1. Vcc voltage:  $+12 \pm 0.2V$ .
2. SMA Female connectors.
3. PCB material: Rogers RO4350 or equivalent, dielectric constant=3.5, dielectric thickness=.030 inch.
4. Capacitors, C1 & C2 should be free of resonance up to the highest frequency specified.

 **Mini-Circuits®**