



# Evaluation Board and Circuit

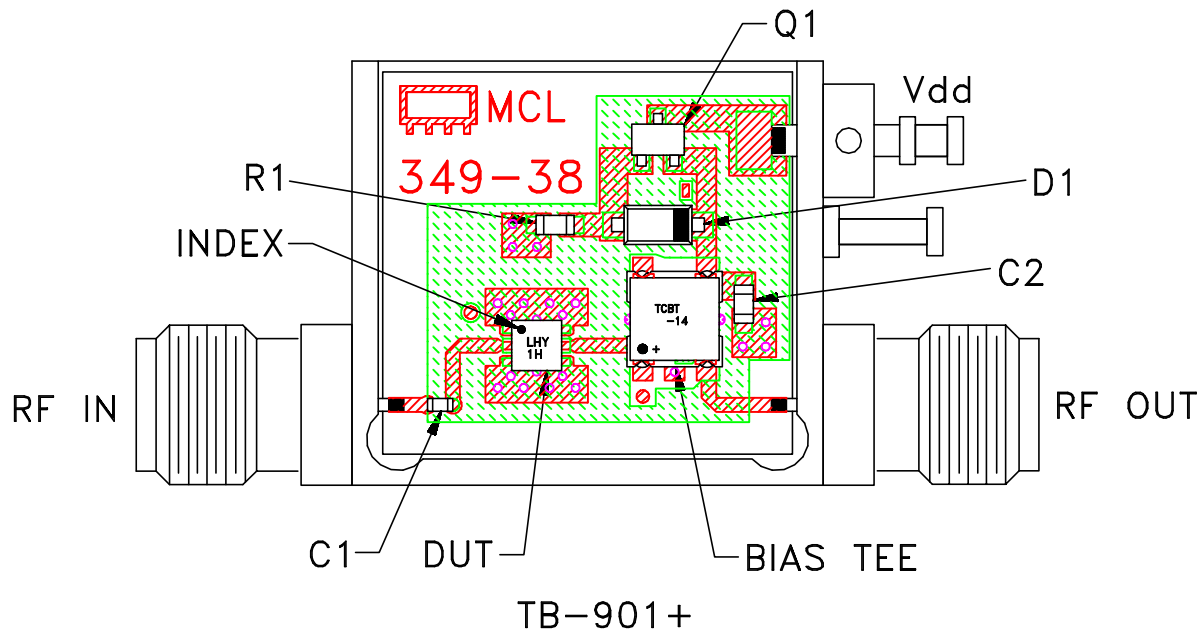


TB-901+

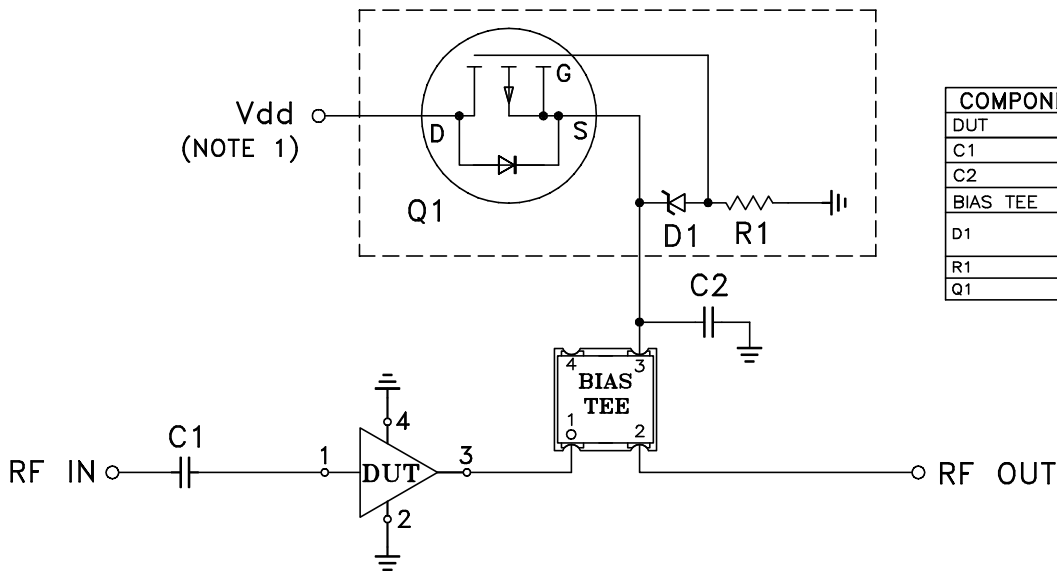

Schematic Diagram

COMPONENT	VALUE	SIZE
DUT	LHY-1H+	3X3 MM
C1	1 nF	0402
C2	1 nF	0603
BIAS TEE	Mini-Circuits TCBT-14+	-
D1	Zener Diode 5.6V ONSEMI MMSZ4690T1G	SOD123
R1	1.5 kOhm	
Q1	Transistor ONSEMI FET NTS4101P	SOT323

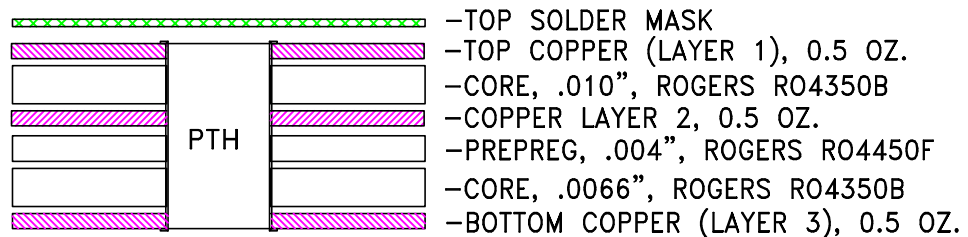

Stack-Up Diagram

## NOTES:

1. Vs voltage:  $+5 \pm 0.2V$ .
2. SMA Female connectors.
3. PCB material: Rogers R04350 or equivalent, dielectric constant=3.5, Total Finished Thickness -  $.026" \pm 10\%$ .

Mini-Circuits®