

RF Transformer

50Ω 1 to 800 MHz

TMO-1-02+



CASE STYLE: A11

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	250mW
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

PRIMARY DOT	1
PRIMARY	3
SECONDARY DOT	2
SECONDARY	4
CASE GROUND	7, 8
NOT USED	5, 6

Outline Drawing

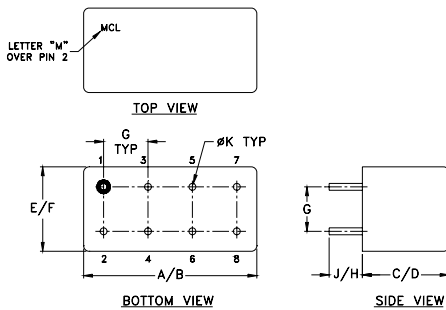

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.480	.500	.240	.255	.210	.230
12.19	12.70	6.10	6.48	5.33	5.84

G	H	J	K	wt
.100	.20	.14	.020	grams
2.54	5.08	3.56	0.51	1.9

Features

- wideband, 1 to 800 MHz
- good return loss
- hermetic case

Applications

- military, hi-rel requirements
- balanced antennas
- impedance matching

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Transformer Electrical Specifications


Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
1	1-800	1-800	2-150	—

*Insertion Loss is referenced to mid-band loss, 1.3 dB typ.

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
1.00	1.80	12.31
2.73	1.44	15.92
7.43	1.33	17.22
19.91	1.39	17.37
89.60	1.42	17.23
403.20	1.77	12.96
501.04	1.92	11.59
602.16	2.16	10.32
699.89	2.38	9.22
800.00	2.64	8.24

Config. C



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

