

Plug-In Switch

50Ω SPDT Pin Diode, Reflective TTL Driver, 10 to 3000 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power	L(+20 dBm), M(+28 dBm), U(+30 dBm)
Supply V	+6V max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

RF IN (COM)	8
RF OUT 1	5
RF OUT 2	11
TTL IN	3
+5V	1
GROUND	2,4,6,7,9,10,12
CASE GROUND	2,4,6,7,9,10,12

Outline Drawing

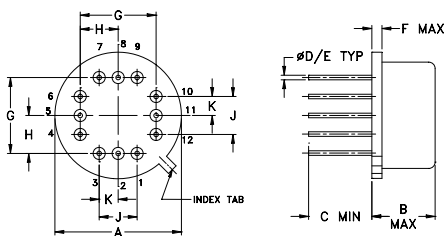

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.600	.250	.25	.016	.020	.04
15.24	6.35	6.35	0.41	0.51	1.02
G	H	J	K	wt	
.400	.200	.200	.100	grams	
10.16	5.08	5.08	2.54	4.0	

Features

- wideband, 10 to 3000 MHz
- hermetic, compact TO-8 can
- high isolation, 40 dB typ.

Applications

- military, hi-rel applications
- antenna switching
- satellite communication

TOSW-230+



Generic photo used for illustration purposes only

CASE STYLE: QQ96

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Switch Electrical Specifications

MODEL NO.	FREQ. (MHz)		INSERTION LOSS (dB)				IN-OUT ISOLATION (dB)					
	f_L	f_U	Low band lw		Upper band U		Frequency Band L		Frequency Band M		Frequency Band U	
			Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.
TOSW-230+	10	3000	1.3	1.9	1.8	2.7	60	40	40	28	35	22

L= low range(f_L to 10 f_L)


M=mid range(10 f_L to $f_U/2$)
lw=low band (f_L to $f_U/2$)

U=upper range ($f_U/2$ to f_U)

Additional Specifications

VSWR ("ON" STATE)	1.3 Typ., 1.9 Max.
SWITCHING TIME (μSEC)	2.0 Typ., 4.0 Max.
SUPPLY VOLTAGE	+5V
SUPPLY CURRENT	10 mA Max.
TTL INPUT HIGH THRESHOLD	2V Min.
TTL INPUT LOW THRESHOLD	0.8V Max.
1 dB COMPRESSION	10 to 100 MHz Above 100 MHz
	+6 increasing to +19 dBm +19 dBm min

Control Logic

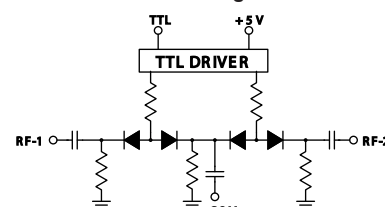

TTL LOGIC		
TTL HIGH	RF-1 OFF	RF-2 ON
TTL LOW	RF-1 ON	RF-2 OFF

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp






www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
M151107
TOSW-230+
WP/CP/AM
200814
Page 1 of 2

Typical Performance Data

FREQ. (MHz)	ON INSERTION LOSS (dB) IN-OUT		AMP. UNBALANCE (dB)		OFF ISOLATION (dB) IN-OUT		OFF ISOLA- TION DELTA (dB)		IN	VSWR OUT	OUT (RF1) OFF
	$\bar{X}$	σ	$\bar{X}$	σ	$\bar{X}$	σ	$\bar{X}$	σ			
10.00	1.18	0.04	0.03	0.02	74.26	1.60	1.14	0.39	1.37	1.41	31.26
20.00	1.06	0.05	0.05	0.05	69.20	1.46	1.45	1.51	1.20	1.22	30.31
50.00	0.92	0.03	0.02	0.01	61.84	1.14	1.60	1.01	1.12	1.12	30.07
100.00	0.88	0.03	0.02	0.01	55.48	0.61	0.75	0.63	1.09	1.10	30.07
200.00	0.88	0.02	0.02	0.01	49.81	0.72	0.64	0.70	1.09	1.09	30.49
500.00	0.94	0.02	0.02	0.01	42.32	0.56	0.53	0.77	1.11	1.11	29.97
552.91	0.94	0.02	0.01	0.01	41.56	0.50	0.61	0.74	1.12	1.10	28.88
792.00	1.02	0.01	0.01	0.01	39.41	0.46	0.68	0.76	1.13	1.12	26.27
1000.00	1.06	0.01	0.01	0.01	37.86	0.40	0.67	0.71	1.12	1.10	24.84
1102.82	1.10	0.01	0.01	0.01	37.96	0.40	0.70	0.73	1.12	1.08	22.83
1341.91	1.16	0.01	0.02	0.01	37.13	0.42	0.94	0.69	1.12	1.06	21.66
1509.27	1.19	0.02	0.02	0.01	36.81	0.45	0.96	0.75	1.14	1.07	20.69
1652.73	1.21	0.01	0.02	0.01	37.32	0.53	0.89	0.79	1.17	1.09	19.92
1891.82	1.27	0.02	0.02	0.02	37.64	0.67	1.82	0.71	1.23	1.14	19.28
2130.91	1.38	0.02	0.02	0.03	38.60	1.13	0.82	0.94	1.27	1.20	24.87
2370.00	1.31	0.02	0.03	0.03	36.48	3.02	2.00	1.04	1.31	1.31	19.46
2609.09	1.50	0.04	0.06	0.03	30.37	2.46	0.49	0.56	1.34	1.37	11.80
2848.18	1.63	0.06	0.04	0.02	27.51	2.19	0.30	0.21	1.28	1.41	10.49
2919.91	1.56	0.04	0.03	0.02	26.87	2.12	0.56	0.28	1.27	1.41	9.46
3000.00	1.58	0.04	0.05	0.03	26.08	2.02	0.86	0.48	1.24	1.35	11.35

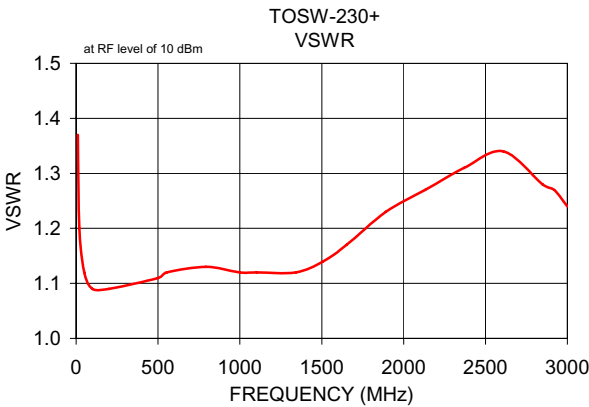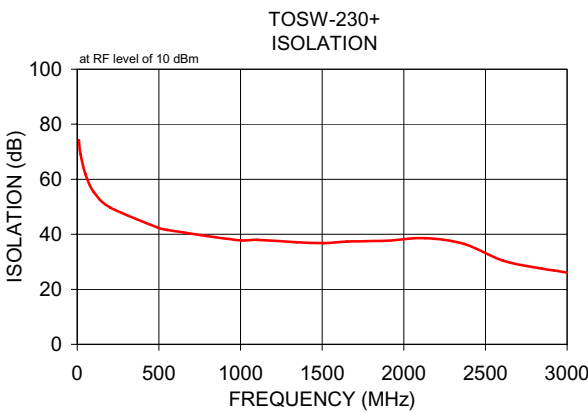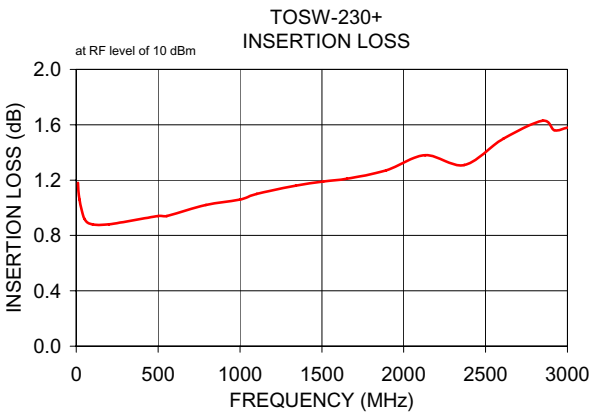

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.




C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB) IN-OUT , "ON"	ISOLATION (dB) IN-OUT , "OFF"	VSWR		
			IN	(:1) OUT , "ON"	OUT , "OFF"
10	1.18	74.26	1.37	1.41	31.26
20	1.06	69.20	1.20	1.22	30.31
50	0.92	61.84	1.12	1.12	30.07
100	0.88	55.48	1.09	1.10	30.07
200	0.88	49.81	1.09	1.09	30.49
500	0.94	42.32	1.11	1.11	29.97
553	0.94	41.56	1.12	1.10	28.88
792	1.02	39.41	1.13	1.12	26.27
1000	1.06	37.86	1.12	1.10	24.84
1103	1.10	37.96	1.12	1.08	22.83
1342	1.16	37.13	1.12	1.06	21.66
1509	1.19	36.81	1.14	1.07	20.69
1653	1.21	37.32	1.17	1.09	19.92
1892	1.27	37.64	1.23	1.14	19.28
2131	1.38	38.60	1.27	1.20	24.87
2370	1.31	36.48	1.31	1.31	19.46
2609	1.50	30.37	1.34	1.37	11.80
2848	1.63	27.51	1.28	1.41	10.49
2920	1.56	26.87	1.27	1.41	9.46
3000	1.58	26.08	1.24	1.35	11.35

Typical Performance Curves

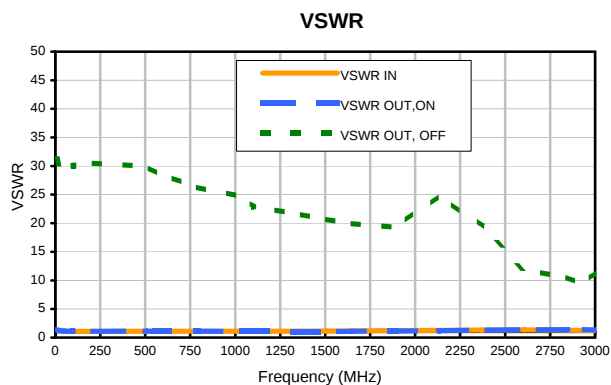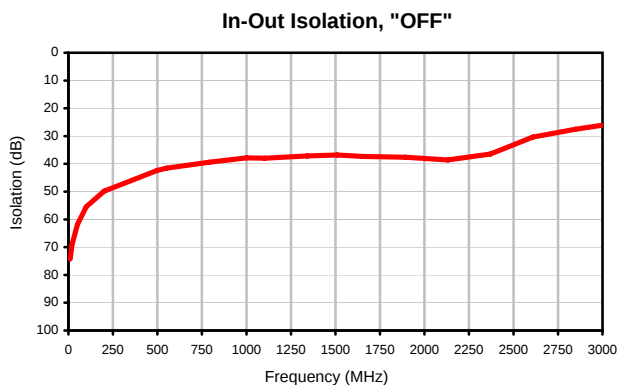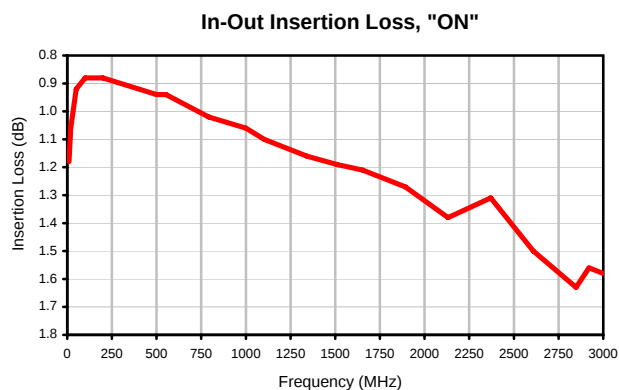

Outline Dimensions

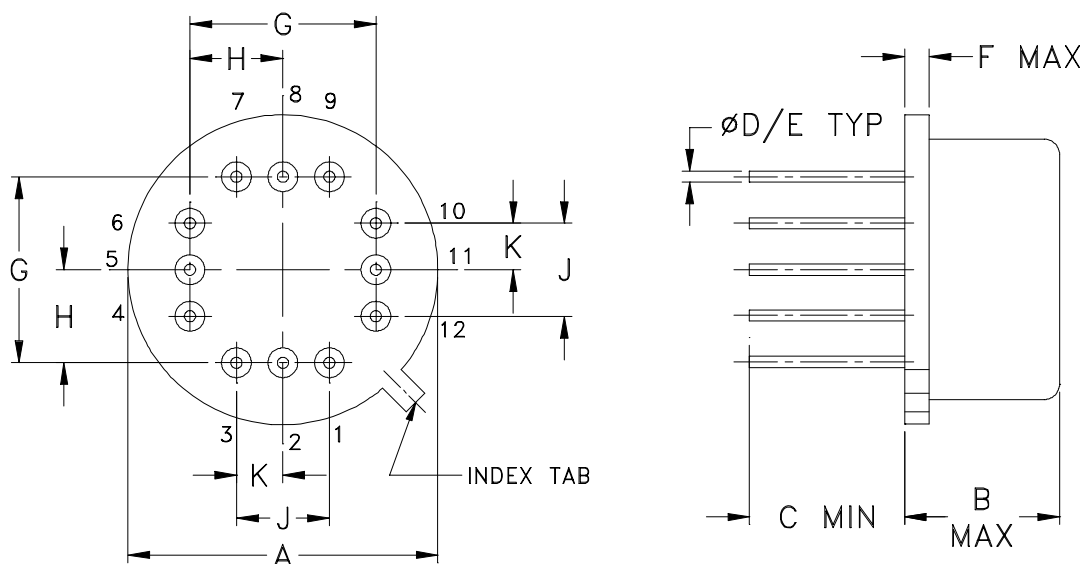

CASE#	A	B	C	D	E	F	G	H	J	K	WT. GRAM
QQ95	.500 (12.70)	.250 (6.35)	.25 (6.35)	.016 (.41)	.020 (.51)	.04 (1.02)	.300 (7.62)	.150 (3.81)	.150 (3.81)	.075 (1.91)	3.5
QQ96	.600 (15.24)						.400 (10.16)	.200 (5.08)	.200 (5.08)	.100 (2.54)	4.0

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Header material: Kovar.
Pin material: Kovar.
Cover material: Nickel.
- Pin finish: Gold plate 25 μ inches (.64 microns) min.
- For pin designations see specification data sheet.
- Pin numbers do not appear on unit, for reference only.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 10 cycles	MIL-STD-202, Method 107, Condition A, except +100°C & 10 cycles
Constant Acceleration	5000g, Y1 axis	MIL-STD-883, Method 2001, Condition A, except Y1 axis only
Solderability	10X Magnification	J-STD-002, 95% Coverage
Resistance to Solder Heat	260°C for 10 seconds	MIL-STD-202, Method 210, Condition B
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215
Gross Leak	125°C Bubble Test	MIL-STD-202, Method 112, Condition D