

*Low Noise, High IP3*

# Monolithic Amplifier

PMA-545+

50Ω    0.05 to 6 GHz



3mm x 3mm MCLP [ EIA: QFN ] Pkg

## The Big Deal

- Ultra Low Noise Figure, 0.8 dB
- Ultra High IP3
- Up to 6 GHz

LTE Performance

## Product Overview

Mini-Circuits PMA-545+ is a E-PHEMT based Ultra-Low Noise MMIC Amplifier operating from 50 MHz to 6 GHz with a unique combination of low noise and high IP3 making this amplifier ideal for sensitive receiver applications. This design operates on a single 3V supply and is internally matched to 50 Ohms.

### Summary Performance at 1 GHz

Operating Frequency:	0.05 to 6.0	GHz
Noise Figure	0.8	dB, typ.
Gain	20	dB, typ.
IP3	+36	dBm, typ.
P <sub>OUT</sub> (at 1dB)	+20	dBm, typ.
DC Current (at 3V)	80	mA, typ.

## Key Features

Feature	Advantages
Ultra Low Noise: 0.8 dB NF at 1GHz	Industry Leading Noise Figure, measured in a 50 Ohm environment – without any external matching
High IP3: +36 dBm IP3 at 1GHz	Combining Low Noise and High IP3 makes this MMIC amplifier ideal for Low Noise Receiver Front End (RFE) because it gives the user advantages at both ends of the dynamic range: sensitivity & two-tone IM dynamic range
Output Power: +20 dBm at 1GHz	The PMA-545+ maintains consistent output power capability over the full operating temperature range making it ideal to be used in remote applications such as LNB's as the L Band driver stage
Broad Band: 0.05 to 6.0GHz	Broadband covering primary wireless communications bands: Cellular, PCS, LTE, WiMAX
Internally Matched	No external matching elements required to achieve the advertised noise and output power over the full band
MCLP Package	Low Inductance, repeatable transitions, excellent thermal pad
Max Input Power +20 dBm	Ruggedized design operates up to input powers often seen at Receiver inputs. Can operate up to + 20dBm without the need of an external limiter
High Reliability	Low, small signal operating current of 80 mA nominal maintains junction temperatures typically below 130°C at 85°C ground lead temperature

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Low Noise, High IP3 Monolithic Amplifier

0.05-6 GHz

## Product Features

- Single Positive Supply Voltage, 3V
- Ultra Low Noise Figure, 0.8 dB typ. at 1GHz
- High IP3, 36 dBm typ. 1GHz
- Gain, 20dB typ. at 1 GHz
- Output Power, up to +20dBm typ.
- Micro-miniature size - 3mm x 3mm
- Aqueous washable



**PMA-545+**

CASE STYLE: DQ849

## Typical Applications

- Cellular
- ISM
- GSM
- WCDMA
- LTE
- WiMAX
- WLAN
- UNII and HIPERLAN



**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

**LTE Performance**

## General Description

PMA-545+ is a high dynamic range, low noise, high IP3, high output power, monolithic amplifier. Manufactured using E-PHEMT\* technology enables it to work with a single positive supply voltage. Unconditionally stable over the operating frequency.

## simplified schematic and pad description

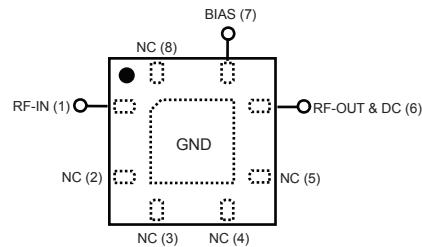

Function	Pad Number	Description (See Application Circuit, Fig. 2)
RF-IN	1	RF input pad
RF-OUT & DC	6	RF output pad (connected to RF-OUT via blocking external cap C2, and Supply voltage Vs via RF Choke L1)
BIAS	7	Bias pad (connected to Vs via Rbias)
GND	paddle in center of bottom	Connected to ground
NOT USED	2,3,4,5,8	No internal connection; recommended use: per PCB Layout PL-299

\*Enhancement mode Pseudomorphic High Electron Mobility Transistor.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



**Electrical Specifications<sup>(1)</sup> at 25°C, Zo=50Ω, (refer to characterization circuit)**

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		0.05		6.0	GHz
DC Voltage (V <sub>d</sub> )			3.0		V
DC Current (I <sub>d</sub> ) <sup>(6)</sup>		65	80	98	mA
DC Current (I <sub>Rbias</sub> )			5.6		mA
Noise Figure	0.05		1.3	—	dB
	0.5		0.8	—	
	1.0		0.8	—	
	2.0		1.0	1.3	
	3.0		1.2	—	
	4.0		1.5	—	
	5.0		2.0	—	
	6.0		2.4	—	
Gain	0.05	—	26.1	—	dB
	0.5	—	23.3	—	
	1.0	—	19.4	—	
	2.0	12.7	14.2	15.6	
	3.0	—	11.1	—	
	4.0	—	8.9	—	
	5.0	—	7.0	—	
	6.0	—	5.5	—	
Input Return Loss	0.05-0.5		11.0		dB
	0.5-6		7.0		
Output Return Loss	0.05		13.3		dB
	0.1-4		20.0		
	4-6		16.0		
Output IP3	0.05		32.8		dBm
	0.5		35.1		
	1.0		36.3		
	2.0		36.4		
	3.0		38.1		
	4.0		40.0		
	5.0		36.0		
	6.0		37.6		
Output Power @ 1 dB compression <sup>(2)</sup>	0.05	—	19.6		dBm
	0.5	—	19.9		
	1.0	—	19.3		
	2.0	18.3	20.3		
	3.0	—	20.1		
	4.0	—	20.7		
	5.0	—	20.0		
	6.0	—	21.2		
DC Current Variation vs. Temperature <sup>(3)</sup>			-0.121		mA/°C
Thermal Resistance			128		°C/W

**Absolute Maximum Ratings<sup>(4)</sup>**

Parameter	Ratings
Operating Temperature <sup>(5)</sup>	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Channel Temperature	150°C
DC Voltage (Pad 6)	5V
Power Dissipation	500mW
DC Current (Pad 6)	160mA
Bias Current (Pad 7)	10mA
Input Power <sup>(7)</sup>	20dBm

(1) Measured on Mini-Circuits Characterization test board TB-502+. See Characterization Test Circuit (Fig. 1)

(2) Current increases at P1dB

(3) (Current at 85°C - Current at -45°C)/130

(4) Permanent damage may occur if any of these limits are exceeded.

These maximum ratings are not intended for continuous normal operation.

(5) Defined with reference to ground pad temperature.

(6) Specified DC current consumption is under small signal conditions.

Current will increase with input RF Power. To maintain maximum current

consumption, external DC current limiting circuits are required on Vd line.

(7) Maximum input power is specified based external Vd current limiting of 100 mA.

Maximum input power will degrade without external current limiting.

**Notes**


A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Characterization Test Circuit

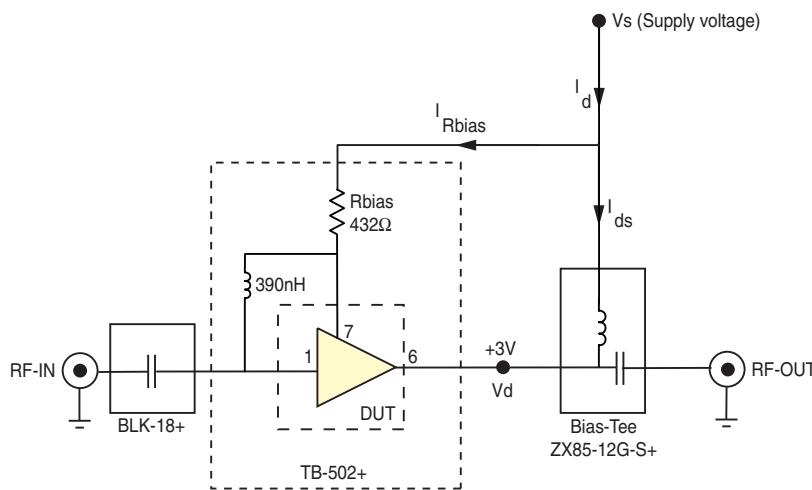

**Fig 1.** Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Characterization Test Board TB-502+) Gain, Output power at 1dB compression (P<sub>1dB</sub>), Output IP<sub>3</sub> (OIP<sub>3</sub>) are measured using R&S Network Analyzer ZVA-24. Noise Figure measured using Agilent's N5242A PNA-X microwave network analyzer.


### Conditions:

1. Gain: Pin=-25 dBm
2. Output IP<sub>3</sub> (OIP<sub>3</sub>): Two tones, spaced 1 MHz apart, 0 dBm/tone at output.
3. Vs adjusted for 3V at device (V<sub>d</sub>), compensating loss of bias tee.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## Product Marking

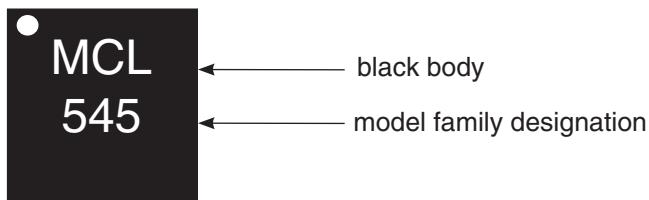

Marking may contain other features or characters for internal lot control

### Additional Detailed Technical Information

Additional information is available on our web site [www.minicircuits.com](http://www.minicircuits.com). To access this information enter the model number on our web site home page.

#### Performance data, graphs, s-parameter data set (.zip file)

#### Case Style: DQ849

Plastic package, exposed paddle, lead finish: tin-silver over nickel

#### Tape & Reel: F104

Standard quantities available on reel: 7" reels with 20, 50, 100, 200, 500, 1K, or 2K devices.


#### Suggested Layout for PCB Design: PL-299

#### Evaluation Board: TB-501+

#### Environmental Ratings: ENV08T1

### Recommended Application Circuit

(refer to evaluation board for PCB Layout and component values)

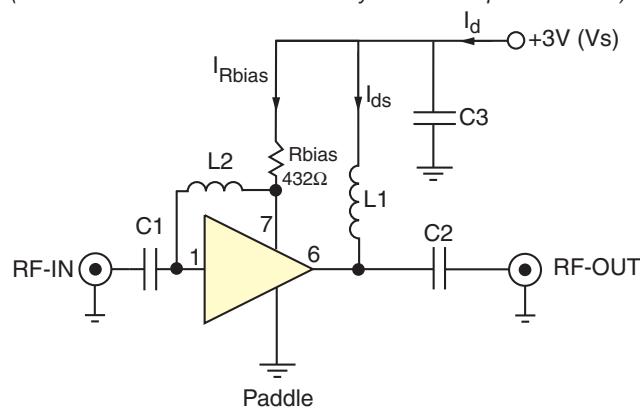

**Fig 2. Recommended Application Circuit**

Note: Resistance of L1, 0.1-0.2Ω typically

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## ESD Rating


Human Body Model (HBM): Class 1A (250V to <500V) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M1 (<100V) in accordance with ANSI/ESD STM5.2-1999; passes 40V

## MSL Rating

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

**MSL Test Flow Chart**

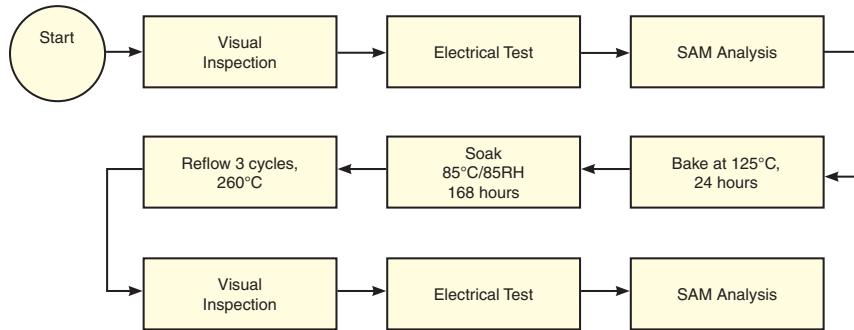

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



*Typical Performance Data***NOTE: Use PDF Bookmarks to view DATA at required conditions****Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Rbias=432 ohms, Id=83 mA @ Temperature = +25degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (1) (dBm)	Noise Figure (dB)
					K	Measure			
50.0	26.20	32.10	12.20	13.00	1.10	0.77	33.50	19.60	1.24
100.0	26.07	31.28	12.11	18.04	1.10	0.77	34.00	19.80	0.80
300.0	24.86	30.13	10.59	23.65	1.11	0.81	36.15	19.81	0.65
500.0	23.22	28.68	9.18	24.25	1.11	0.84	36.43	19.90	0.76
600.0	22.38	28.02	8.67	24.08	1.10	0.86	36.01	19.56	0.70
800.0	20.77	26.55	7.99	23.30	1.10	0.88	37.51	19.51	0.73
1000.0	19.33	25.21	7.55	22.56	1.10	0.89	37.52	19.27	0.78
1200.0	18.04	24.02	7.23	21.62	1.09	0.91	36.36	19.25	0.87
1400.0	16.90	22.92	7.00	21.01	1.09	0.91	37.74	19.69	0.88
1600.0	15.87	21.95	6.80	20.32	1.09	0.92	37.50	20.60	0.90
1700.0	15.39	21.51	6.73	20.07	1.09	0.92	37.24	20.99	0.95
1900.0	14.54	20.64	6.66	19.78	1.08	0.92	37.74	20.64	0.93
2100.0	13.76	19.83	6.61	19.51	1.08	0.92	36.36	19.84	0.96
2300.0	13.05	19.13	6.59	19.46	1.08	0.92	36.63	19.20	1.00
2500.0	12.41	18.43	6.67	19.77	1.08	0.91	35.85	18.89	1.08
2700.0	11.73	17.89	6.46	18.91	1.08	0.93	37.63	19.28	1.30
2900.0	11.25	17.24	6.59	19.24	1.07	0.91	39.39	20.13	1.26
3000.0	11.00	16.94	6.63	19.30	1.07	0.91	38.74	20.14	1.13
3200.0	10.49	16.43	6.90	19.95	1.08	0.90	41.90	20.72	1.26
3400.0	10.09	15.85	6.97	20.24	1.07	0.89	40.03	20.25	1.31
3600.0	9.68	15.34	7.02	20.18	1.07	0.88	39.46	20.20	1.35
3800.0	9.28	14.89	7.11	20.09	1.06	0.87	40.56	20.59	1.45
4000.0	8.88	14.49	7.18	19.78	1.07	0.87	42.38	20.81	1.59
4100.0	8.66	14.32	7.23	19.39	1.07	0.87	41.79	21.00	1.52
4300.0	8.25	13.94	7.20	18.51	1.07	0.86	38.87	21.06	1.66
4500.0	7.82	13.64	7.30	17.57	1.09	0.86	38.06	20.71	1.73
4700.0	7.33	13.39	7.53	16.65	1.12	0.85	36.90	20.37	1.94
4900.0	7.22	12.90	6.72	16.63	1.06	0.85	36.54	20.03	1.86
5100.0	6.93	12.57	6.46	15.91	1.05	0.85	36.38	20.27	1.95
5300.0	6.62	12.30	6.28	15.23	1.05	0.85	39.83	20.79	1.95
5400.0	6.45	12.17	6.17	14.85	1.05	0.85	38.69	21.24	2.13
5600.0	6.13	11.95	6.01	14.21	1.05	0.85	42.85	21.86	2.17
5800.0	5.74	11.78	5.89	13.45	1.06	0.85	38.39	21.62	2.37
6000.0	5.48	11.54	5.57	13.07	1.05	0.86	37.35	21.21	2.44
6200.0	5.18	11.34	5.31	12.62	1.04	0.86	37.47	20.72	2.54
6400.0	4.87	11.18	5.10	12.18	1.04	0.87	35.76	19.96	2.59
6500.0	4.71	11.11	4.97	11.87	1.04	0.87	36.35	19.97	2.80
6700.0	4.34	11.03	4.89	11.41	1.05	0.88	36.53	19.98	2.85
6900.0	3.86	11.08	5.08	10.94	1.10	0.88	38.97	20.43	3.33
7000.0	3.55	11.15	5.54	10.84	1.15	0.87	38.82	20.96	3.50

(1) Current increases at P1dB

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Rbias=432 ohms, Id=93 mA @ Temperature = -45degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (1) (dBm)	Noise Figure (dB)
					K	Measure			
50.0	26.40	31.90	13.40	12.10	1.10	0.70	32.30	20.00	0.92
100.0	26.06	31.08	14.18	15.82	1.09	0.74	35.85	20.16	0.68
300.0	24.89	30.25	11.98	18.36	1.13	0.77	35.84	20.23	0.50
500.0	23.35	28.94	9.98	19.51	1.14	0.81	36.58	20.40	0.62
600.0	22.56	28.14	9.36	19.39	1.13	0.81	36.73	20.06	0.54
800.0	21.01	26.63	8.46	19.56	1.12	0.83	38.11	19.91	0.52
1000.0	19.61	25.24	7.92	19.30	1.10	0.84	37.72	19.56	0.61
1200.0	18.35	23.99	7.51	18.99	1.09	0.85	38.49	19.40	0.64
1400.0	17.22	22.87	7.21	18.64	1.08	0.86	39.59	19.77	0.67
1600.0	16.21	21.87	6.96	18.22	1.08	0.86	37.82	20.82	0.65
1700.0	15.74	21.42	6.88	18.07	1.07	0.87	38.53	21.27	0.67
1900.0	14.90	20.52	6.76	17.98	1.07	0.86	38.09	20.96	0.74
2100.0	14.13	19.70	6.69	17.83	1.06	0.86	37.11	20.11	0.67
2300.0	13.43	18.97	6.67	17.83	1.06	0.86	36.50	19.46	0.67
2500.0	12.81	18.25	6.73	18.28	1.06	0.86	36.05	19.13	0.71
2700.0	12.10	17.73	6.46	17.52	1.06	0.88	37.13	19.48	0.97
2900.0	11.65	17.04	6.65	17.89	1.05	0.85	40.15	20.36	0.92
3000.0	11.40	16.74	6.70	18.08	1.05	0.85	38.74	20.33	0.78
3200.0	10.91	16.20	6.96	18.66	1.05	0.84	40.84	21.09	0.83
3400.0	10.52	15.61	7.04	19.22	1.04	0.83	40.38	20.74	0.90
3600.0	10.12	15.10	7.11	19.16	1.04	0.82	39.48	20.73	0.96
3800.0	9.72	14.63	7.17	19.08	1.04	0.81	41.18	21.11	1.04
4000.0	9.33	14.22	7.21	18.83	1.04	0.80	43.44	21.23	1.00
4100.0	9.11	14.05	7.23	18.48	1.04	0.80	42.96	21.35	1.09
4300.0	8.70	13.67	7.20	17.70	1.04	0.80	41.41	21.47	1.11
4500.0	8.27	13.37	7.22	16.61	1.05	0.79	38.97	21.07	1.20
4700.0	7.77	13.15	7.58	15.60	1.08	0.79	37.24	20.69	1.49
4900.0	7.64	12.65	6.59	15.50	1.03	0.79	36.37	20.19	1.35
5100.0	7.36	12.32	6.25	14.85	1.02	0.79	36.43	20.33	1.35
5300.0	7.05	12.05	6.08	14.15	1.02	0.78	38.53	20.93	1.51
5400.0	6.88	11.92	5.95	13.88	1.02	0.78	37.88	21.34	1.52
5600.0	6.56	11.70	5.77	13.21	1.02	0.78	41.97	22.14	1.60
5800.0	6.17	11.54	5.66	12.62	1.02	0.79	41.17	21.96	1.70
6000.0	5.92	11.28	5.39	12.30	1.01	0.79	38.50	21.44	1.78
6200.0	5.64	11.07	5.13	11.82	1.01	0.79	38.32	20.93	1.90
6400.0	5.34	10.89	4.90	11.47	1.00	0.79	36.45	20.22	1.90
6500.0	5.20	10.81	4.81	11.13	1.00	0.79	36.19	20.09	1.90
6700.0	4.88	10.69	4.71	10.79	1.01	0.79	36.32	20.15	2.08
6900.0	4.49	10.65	4.81	10.44	1.03	0.80	38.57	20.79	2.33
7000.0	4.10	10.81	5.25	10.18	1.08	0.80	39.02	21.18	2.63

(1) Current increases at P1dB

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Rbias=432 ohms, Id=79 mA @ Temperature = +85degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (1) (dBm)	Noise Figure (dB)
					K	Measure			
50.0	25.90	32.20	10.80	12.80	1.10	0.84	31.40	19.30	1.65
100.0	25.97	31.29	10.68	18.15	1.10	0.80	33.38	19.54	1.10
300.0	24.73	30.08	9.51	26.33	1.08	0.84	33.98	19.41	0.79
500.0	23.04	28.53	8.54	27.82	1.08	0.88	34.44	19.40	0.92
600.0	22.18	27.83	8.12	27.84	1.08	0.90	35.65	19.13	0.87
800.0	20.55	26.43	7.63	26.63	1.08	0.92	36.05	19.25	0.91
1000.0	19.08	25.14	7.27	25.93	1.08	0.94	36.28	19.22	0.97
1200.0	17.79	23.98	7.04	24.15	1.09	0.94	36.65	19.34	1.09
1400.0	16.64	22.92	6.87	23.50	1.09	0.95	38.98	19.80	1.14
1600.0	15.60	21.98	6.69	22.48	1.09	0.96	36.97	20.48	1.15
1700.0	15.11	21.55	6.62	22.32	1.09	0.96	37.36	20.78	1.20
1900.0	14.26	20.70	6.58	21.61	1.09	0.96	36.15	20.41	1.22
2100.0	13.48	19.93	6.55	21.47	1.09	0.96	35.23	19.62	1.24
2300.0	12.77	19.22	6.54	21.29	1.09	0.96	36.10	18.97	1.26
2500.0	12.13	18.55	6.61	21.33	1.09	0.95	36.19	18.69	1.36
2700.0	11.45	18.01	6.42	20.19	1.10	0.96	37.38	19.12	1.68
2900.0	10.95	17.37	6.55	20.42	1.09	0.95	40.37	19.99	1.61
3000.0	10.70	17.08	6.58	20.45	1.09	0.95	39.45	19.99	1.51
3200.0	10.19	16.58	6.79	20.69	1.10	0.94	39.85	20.46	1.65
3400.0	9.78	16.01	6.86	20.88	1.09	0.93	38.75	19.94	1.68
3600.0	9.35	15.53	6.89	20.54	1.09	0.92	39.35	19.85	1.75
3800.0	8.95	15.09	6.98	20.41	1.09	0.92	40.52	20.30	1.88
4000.0	8.54	14.68	7.10	20.13	1.09	0.91	41.99	20.57	2.04
4100.0	8.31	14.53	7.15	19.61	1.10	0.91	42.22	20.74	1.93
4300.0	7.90	14.14	7.13	19.04	1.10	0.91	38.80	20.71	2.15
4500.0	7.49	13.82	7.26	18.16	1.12	0.90	38.32	20.39	2.27
4700.0	7.04	13.55	7.52	17.67	1.14	0.89	37.38	20.14	2.48
4900.0	6.88	13.09	6.80	17.60	1.09	0.90	37.30	19.89	2.37
5100.0	6.62	12.74	6.64	17.00	1.08	0.90	37.14	20.27	2.44
5300.0	6.30	12.47	6.43	16.30	1.08	0.90	40.89	20.67	2.47
5400.0	6.14	12.34	6.33	15.88	1.08	0.90	38.66	21.06	2.69
5600.0	5.82	12.12	6.19	15.24	1.08	0.90	40.88	21.49	2.68
5800.0	5.45	11.94	6.04	14.38	1.09	0.90	38.43	21.28	2.88
6000.0	5.18	11.70	5.74	13.78	1.07	0.90	37.92	21.02	3.03
6200.0	4.87	11.53	5.45	13.30	1.07	0.91	37.44	20.59	3.11
6400.0	4.54	11.38	5.19	12.74	1.07	0.92	36.18	19.80	3.32
6500.0	4.36	11.31	5.04	12.36	1.07	0.92	36.91	19.76	3.43
6700.0	3.98	11.25	4.96	11.96	1.09	0.93	35.79	19.61	3.80
6900.0	3.47	11.33	5.16	11.37	1.14	0.93	37.29	19.94	4.02
7000.0	3.21	11.34	5.46	11.37	1.18	0.93	39.71	20.58	4.29

(1) Current increases at P1dB

# MMIC Amplifier

PMA-545+

## Typical Performance Data

### Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Id=80mA @ Temperature = +25degC (1)

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (2) (dBm)	FREQ (MHz)	Noise Figure (dB)
					K	Measure				
50.0	26.15	31.69	11.58	13.24	1.08	0.82	31.20	20.09	50.00	1.16
100.0	26.00	31.20	11.90	17.78	1.12	0.74	34.05	20.29	100.00	0.83
300.0	24.73	30.28	10.27	23.60	1.14	0.79	34.02	20.36	400.00	0.68
500.0	23.21	28.80	8.87	24.18	1.10	0.84	34.64	20.16	600.00	0.69
600.0	22.37	28.16	8.60	23.67	1.12	0.85	36.97	20.57	800.00	0.73
800.0	20.85	26.71	8.00	23.93	1.10	0.87	35.92	20.11	1100.00	0.79
1000.0	19.46	25.38	7.60	23.09	1.09	0.88	36.62	20.54	1300.00	0.86
1200.0	18.20	24.16	7.25	22.64	1.08	0.90	35.83	20.29	1600.00	0.95
1400.0	17.07	23.08	6.97	22.12	1.08	0.91	36.40	21.11	1800.00	0.97
1600.0	16.04	22.13	6.79	21.48	1.07	0.92	37.52	21.19	2000.00	0.95
1700.0	15.56	21.69	6.75	21.30	1.08	0.92	36.85	21.84	2300.00	1.02
1900.0	14.68	20.86	6.74	21.06	1.08	0.92	36.49	21.41	2500.00	1.09
2100.0	13.91	20.07	6.67	21.03	1.08	0.92	36.88	20.99	2700.00	1.29
2300.0	13.22	19.33	6.69	21.40	1.07	0.92	35.65	19.79	3000.00	1.08
2500.0	12.60	18.65	6.79	21.77	1.07	0.91	36.69	19.95	3200.00	1.34
2700.0	11.89	18.12	6.65	20.86	1.08	0.93	37.48	20.25	3400.00	1.38
2900.0	11.46	17.44	6.95	21.72	1.07	0.90	38.20	20.74	3700.00	1.45
3000.0	11.22	17.12	7.07	22.15	1.07	0.90	38.46	20.69	3900.00	1.53
3200.0	10.76	16.56	7.30	22.69	1.07	0.88	38.62	21.07	4100.00	1.63
3400.0	10.34	16.02	7.46	22.87	1.07	0.87	39.07	20.74	4400.00	1.79
3600.0	9.94	15.48	7.61	23.13	1.07	0.86	38.87	20.97	4600.00	1.81
3800.0	9.54	15.05	7.76	22.98	1.06	0.85	39.25	20.76	4900.00	2.12
4000.0	9.12	14.64	7.83	22.52	1.07	0.85	39.50	21.02	5100.00	2.15
4100.0	8.91	14.46	7.83	21.90	1.07	0.85	40.38	21.09	5300.00	2.18
4300.0	8.47	14.13	7.67	20.53	1.07	0.85	38.40	20.47	5600.00	2.35
4500.0	8.09	13.77	7.45	19.49	1.07	0.85	37.60	20.51	5800.00	2.40
4700.0	7.67	13.50	7.44	18.47	1.08	0.85	36.86	20.22	6000.00	2.53
4900.0	7.15	13.34	7.50	17.28	1.11	0.86	36.05	19.82	6300.00	2.82
5100.0	7.03	12.85	6.61	16.93	1.06	0.86	36.04	20.24	6500.00	2.91
5300.0	6.74	12.55	6.32	15.94	1.05	0.86	38.07	20.40	6700.00	3.10
5400.0	6.59	12.42	6.22	15.51	1.05	0.86	37.55	20.97	7000.00	3.66
5600.0	6.27	12.18	6.01	14.98	1.04	0.87	38.08	21.49		
5800.0	5.96	11.96	5.85	14.18	1.04	0.86	37.74	21.21		
6000.0	5.60	11.81	5.70	13.28	1.05	0.86	36.91	20.79		
6200.0	5.31	11.61	5.32	12.68	1.03	0.87	36.05	20.15		
6400.0	4.98	11.46	4.96	12.10	1.02	0.89	35.59	19.36		
6500.0	4.82	11.40	4.82	11.87	1.02	0.90	35.77	19.35		
6700.0	4.45	11.33	4.54	11.34	1.02	0.91	35.56	18.67		
6900.0	4.02	11.32	4.38	10.66	1.03	0.92	37.30	20.05		
7000.0	3.73	11.39	4.46	10.33	1.06	0.92	37.93	20.46		

(1) External Rbias resistor is adjusted to obtain desired current

(2) Current increases at P1dB



REV. X3

PMA-545+

2/8/2010

Page 4 of 6

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

# MMIC Amplifier

PMA-545+

## Typical Performance Data

### Definitions:

Input Return Loss = -S11 (dB)  
 Gain(Power Gain) = S21 (dB)  
 Reverse Isolation = -S12 (dB)  
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Id=65mA @ Temperature = +25degC (1)

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output (2)	FREQ	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(MHz)	(dB)
50.0	25.88	31.79	11.20	13.20	1.09	0.84	32.00	20.17	50.00	1.24
100.0	25.70	30.97	11.45	17.67	1.10	0.75	33.13	20.37	100.0	0.84
300.0	24.53	30.06	9.94	25.88	1.12	0.80	34.65	20.43	400.0	0.75
500.0	23.03	28.62	8.68	27.76	1.09	0.84	34.67	20.29	600.0	0.78
600.0	22.19	27.87	8.45	27.29	1.10	0.86	35.84	20.72	800.0	0.75
800.0	20.71	26.58	7.88	25.93	1.10	0.88	36.38	20.28	1100.0	0.88
1000.0	19.31	25.30	7.49	24.94	1.09	0.90	36.74	20.71	1300.0	0.94
1200.0	18.06	24.13	7.17	24.11	1.08	0.91	37.10	20.46	1600.0	0.99
1400.0	16.94	23.09	6.91	23.26	1.08	0.92	36.88	21.20	1800.0	1.06
1600.0	15.91	22.15	6.74	22.55	1.08	0.93	37.37	21.24	2000.0	1.05
1700.0	15.43	21.72	6.70	22.27	1.08	0.94	35.99	21.83	2300.0	1.06
1900.0	14.56	20.89	6.67	21.97	1.08	0.94	36.12	21.47	2500.0	1.10
2100.0	13.79	20.12	6.61	21.87	1.08	0.94	37.55	21.12	2700.0	1.35
2300.0	13.11	19.39	6.62	22.22	1.08	0.94	36.90	19.95	3000.0	1.23
2500.0	12.48	18.71	6.76	22.69	1.08	0.93	38.79	20.12	3200.0	1.28
2700.0	11.77	18.20	6.60	21.53	1.08	0.94	39.47	20.41	3400.0	1.35
2900.0	11.33	17.53	6.88	22.49	1.08	0.92	40.27	20.87	3700.0	1.37
3000.0	11.09	17.22	6.99	22.92	1.08	0.92	40.69	20.82	3900.0	1.52
3200.0	10.63	16.66	7.21	23.45	1.08	0.91	41.29	21.21	4100.0	1.62
3400.0	10.21	16.12	7.39	23.66	1.08	0.89	40.48	20.92	4400.0	1.73
3600.0	9.82	15.59	7.56	23.90	1.07	0.88	42.01	21.17	4600.0	1.84
3800.0	9.43	15.13	7.72	23.73	1.07	0.87	42.41	20.97	4900.0	2.10
4000.0	9.03	14.73	7.79	23.19	1.07	0.87	42.40	21.16	5100.0	2.00
4100.0	8.81	14.56	7.78	22.38	1.07	0.87	42.34	21.06	5300.0	2.16
4300.0	8.37	14.23	7.60	20.80	1.08	0.87	41.16	20.37	5600.0	2.19
4500.0	7.98	13.86	7.36	19.92	1.08	0.87	39.15	20.47	5800.0	2.34
4700.0	7.58	13.57	7.37	18.93	1.09	0.87	40.03	20.26	6000.0	2.46
4900.0	7.04	13.43	7.47	17.70	1.12	0.88	39.33	19.87	6300.0	2.71
5100.0	6.93	12.94	6.59	17.31	1.06	0.88	39.19	20.29	6500.0	2.73
5300.0	6.64	12.64	6.30	16.26	1.05	0.88	42.33	20.43	6700.0	2.87
5400.0	6.48	12.51	6.19	15.89	1.05	0.88	42.10	20.96	7000.0	3.59
5600.0	6.17	12.27	5.96	15.30	1.05	0.89	40.24	21.45		
5800.0	5.85	12.05	5.80	14.43	1.05	0.89	39.56	21.23		
6000.0	5.48	11.90	5.66	13.45	1.05	0.89	39.28	20.87		
6200.0	5.20	11.71	5.26	12.81	1.04	0.90	38.01	20.26		
6400.0	4.88	11.54	4.91	12.20	1.03	0.91	36.94	19.47		
6500.0	4.71	11.48	4.78	11.99	1.02	0.92	37.96	19.47		
6700.0	4.36	11.39	4.52	11.55	1.02	0.93	38.25	18.67		
6900.0	3.94	11.37	4.38	10.97	1.04	0.94	40.70	20.26		
7000.0	3.65	11.43	4.46	10.64	1.06	0.94	40.40	20.66		

(1) External Rbias resistor is adjusted to obtain desired current

(2) Current increases at P1dB

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Id=98mA @ Temperature = +25degC (1)

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (2) (dBm)	FREQ (MHz)	Noise Figure (dB)
					K	Measure				
50.0	25.38	32.26	11.84	13.59	1.09	0.82	33.80	20.08	50.0	1.24
100.0	26.16	31.38	12.41	17.15	1.14	0.73	34.05	20.23	100.0	0.88
300.0	24.85	30.60	10.47	21.85	1.16	0.79	33.82	20.19	400.0	0.68
500.0	23.33	29.10	9.03	22.74	1.11	0.84	34.26	20.01	600.0	0.75
600.0	22.48	28.41	8.72	23.68	1.13	0.85	34.82	20.41	800.0	0.78
800.0	20.98	26.92	8.15	22.57	1.11	0.86	34.36	19.96	1100.0	0.82
1000.0	19.57	25.47	7.75	22.24	1.10	0.87	34.60	20.40	1300.0	0.91
1200.0	18.31	24.22	7.39	21.84	1.09	0.89	35.11	20.15	1600.0	1.00
1400.0	17.18	23.12	7.09	21.39	1.08	0.90	35.42	20.98	1800.0	1.02
1600.0	16.14	22.17	6.89	20.90	1.08	0.91	36.52	21.08	2000.0	1.01
1700.0	15.65	21.73	6.86	20.71	1.08	0.91	36.55	21.78	2300.0	1.11
1900.0	14.77	20.88	6.86	20.65	1.08	0.91	35.75	21.30	2500.0	1.16
2100.0	13.99	20.09	6.81	20.73	1.08	0.91	34.87	20.84	2700.0	1.37
2300.0	13.30	19.35	6.79	21.14	1.07	0.91	33.62	19.63	3000.0	1.21
2500.0	12.68	18.66	6.94	21.55	1.07	0.90	33.43	19.79	3200.0	1.34
2700.0	11.97	18.14	6.77	20.64	1.08	0.91	34.05	20.11	3400.0	1.45
2900.0	11.53	17.45	7.08	21.50	1.07	0.89	35.03	20.62	3700.0	1.45
3000.0	11.29	17.14	7.19	21.98	1.07	0.89	34.75	20.56	3900.0	1.55
3200.0	10.82	16.60	7.43	22.56	1.07	0.88	35.70	20.96	4100.0	1.67
3400.0	10.39	16.05	7.60	22.88	1.07	0.86	35.73	20.63	4400.0	1.79
3600.0	10.01	15.51	7.74	23.11	1.07	0.85	35.65	20.88	4600.0	1.85
3800.0	9.61	15.06	7.90	23.12	1.07	0.84	35.98	20.68	4900.0	2.19
4000.0	9.21	14.65	8.00	22.86	1.07	0.84	36.19	20.98	5100.0	2.16
4100.0	8.99	14.46	7.99	22.07	1.07	0.84	37.16	21.05	5300.0	2.30
4300.0	8.57	14.12	7.83	20.56	1.07	0.84	35.37	20.41	5600.0	2.28
4500.0	8.17	13.78	7.62	19.54	1.07	0.84	34.83	20.38	5800.0	2.58
4700.0	7.73	13.51	7.64	18.50	1.09	0.84	33.19	20.04	6000.0	2.62
4900.0	7.22	13.36	7.64	17.32	1.11	0.85	33.34	19.62	6300.0	2.88
5100.0	7.10	12.87	6.76	16.87	1.06	0.85	33.56	20.07	6500.0	3.08
5300.0	6.81	12.57	6.45	15.83	1.05	0.85	34.36	20.31	6700.0	3.15
5400.0	6.65	12.44	6.34	15.43	1.05	0.85	34.83	20.89	7000.0	3.73
5600.0	6.33	12.21	6.09	14.93	1.04	0.86	36.09	21.45		
5800.0	6.00	11.99	5.94	14.10	1.05	0.86	35.13	21.16		
6000.0	5.64	11.85	5.80	13.16	1.05	0.85	34.05	20.69		
6200.0	5.36	11.64	5.40	12.53	1.04	0.86	33.26	20.06		
6400.0	5.04	11.49	5.04	11.97	1.03	0.88	33.07	19.24		
6500.0	4.87	11.42	4.91	11.78	1.03	0.88	32.67	19.24		
6700.0	4.53	11.33	4.65	11.35	1.02	0.90	32.51	18.60		
6900.0	4.10	11.31	4.50	10.77	1.04	0.91	34.14	19.95		
7000.0	3.82	11.37	4.61	10.44	1.07	0.91	34.26	20.34		

(1) External Rbias resistor is adjusted to obtain desired current

(2) Current increases at P1dB



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS










REV. X3

PMA-545+

2/8/2010








Page 6 of 6

## Typical Performance Curves

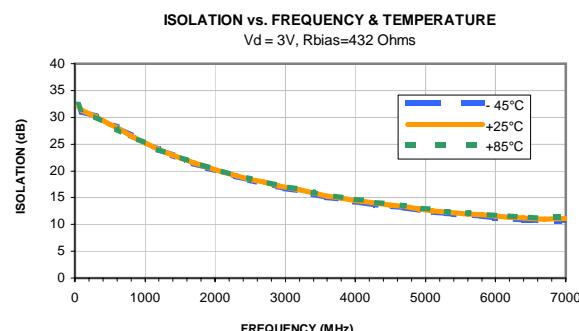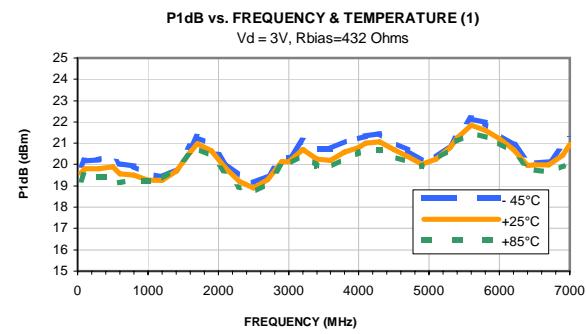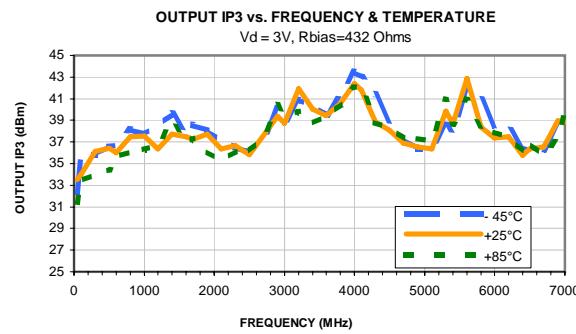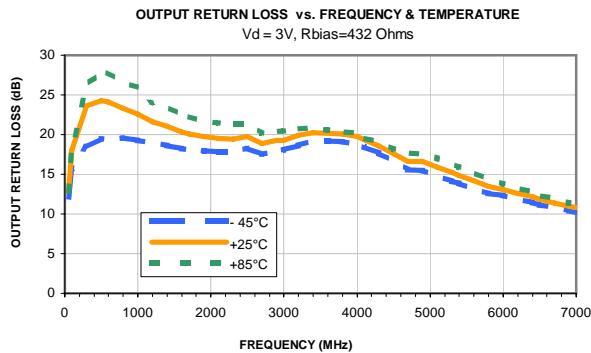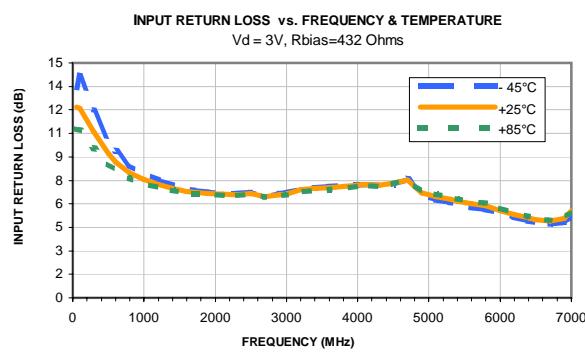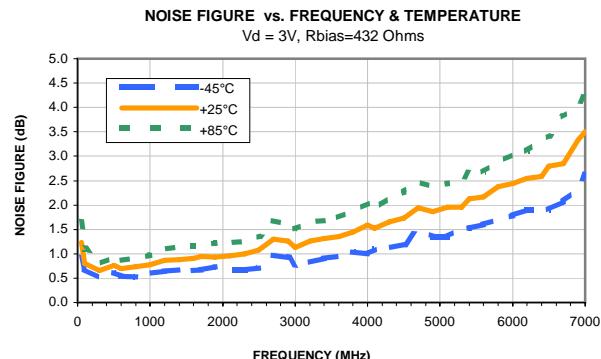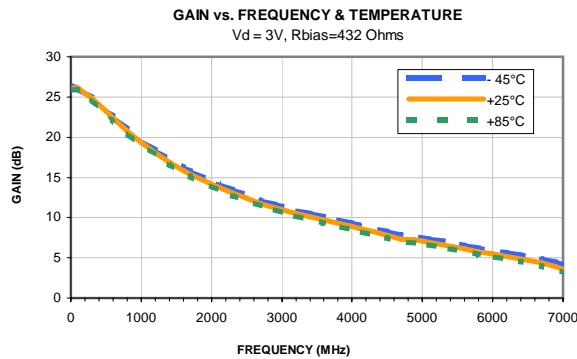

(1) Current increases at P1dB

## Typical Performance Curves

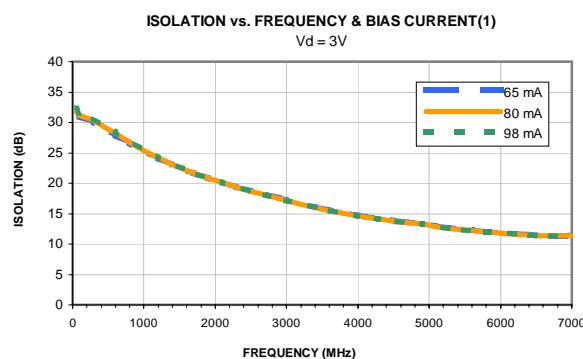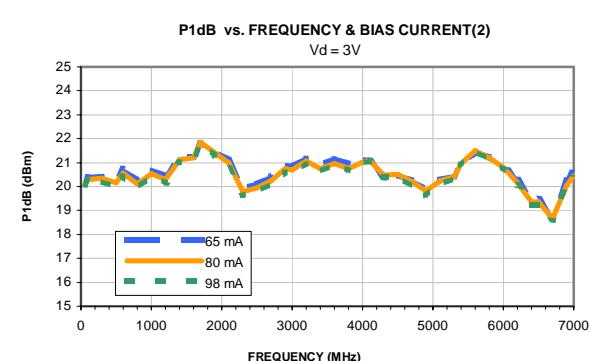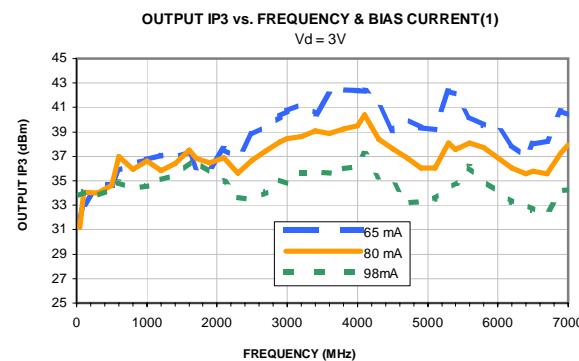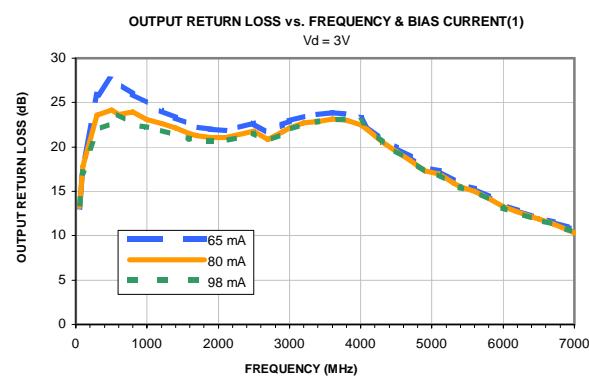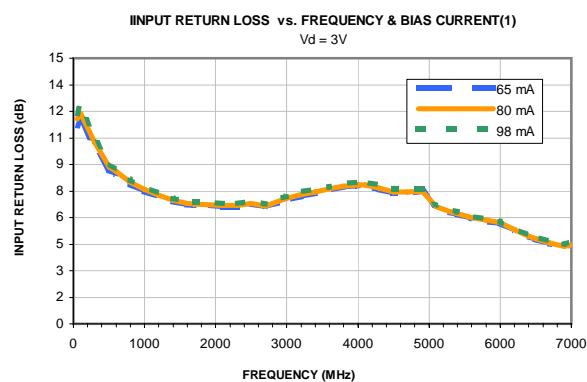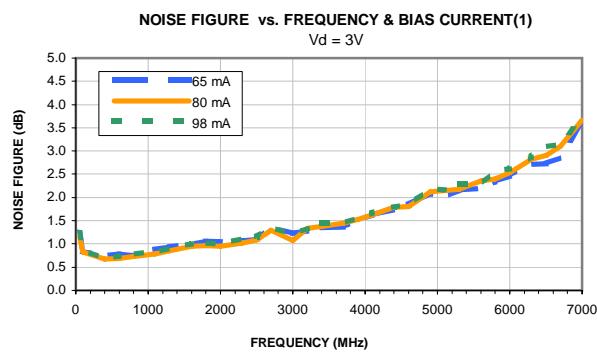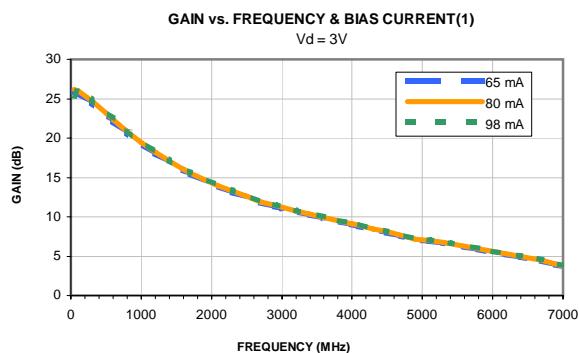


- (1) External Rbias resistor is adjusted to obtain desired current
- (2) Current increases at P1dB

# Case Style


DQ

DQ849

## Outline Dimensions

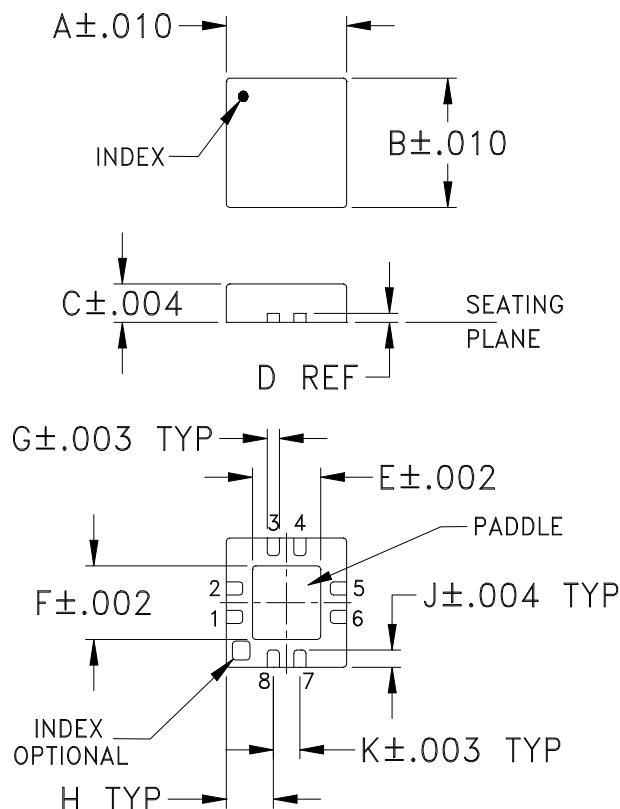

## PCB Land Pattern

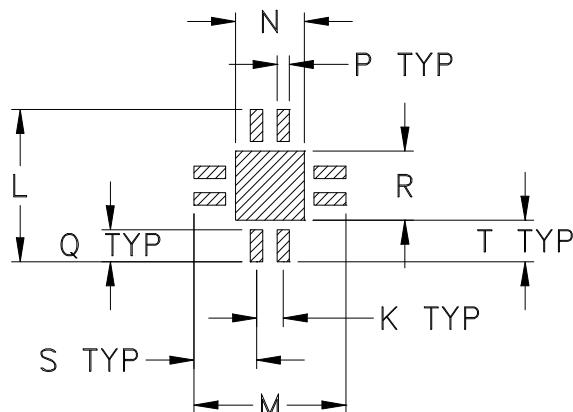

Suggested Layout,  
Tolerance to be within ±.002

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	N
DQ849	.118 (3.00)	.118 (3.00)	.035 (0.89)	.008 (0.20)	.067 (1.70)	.067 (1.70)	.012 (0.30)	.046 (1.17)	.016 (0.41)	.026 (0.66)	.148 (3.76)	.148 (3.76)	.067 (1.70)

CASE #	P	Q	R	S	T	WT. GRAM
DQ849	.012 (0.30)	.031 (0.79)	.067 (1.70)	.061 (1.55)	.041 (1.04)	.02

Dimensions are in inches (mm). Tolerances: 2Pl. ± .01; 3 Pl. ± .004

### Notes:

1. Case material: Plastic.
2. Termination finish:  
For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin plated. All models, (+) suffix.  
See Data sheet.  
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010


INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Mini-Circuits ISO 9001 & ISO 14001 Certified

# Tape & Reel Packaging TR-F104

## DEVICE ORIENTATION IN T&R

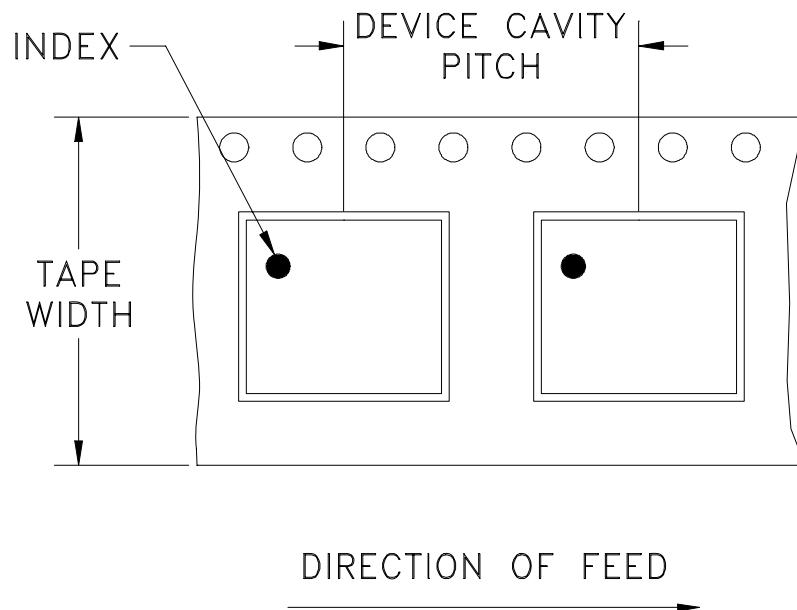

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
		7	Standard	2000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Mini-Circuits ISO 9001 & ISO 14001 Certified


## THIRD ANGLE PROJECTION



## REVISI

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M121752	NEW RELEASE	03/05/09	PW	TH
A	M129864	ADDED DIMENSIONS	12/14/10	MMG	MM
B	M137913	REMOVED COMPONENT VALUES	07/10/12	GF	DJ

SUGGESTED MOUNTING CONFIGURATION FOR  
DQ849 CASE STYLES  
"08AM01" PIN CONNECTION

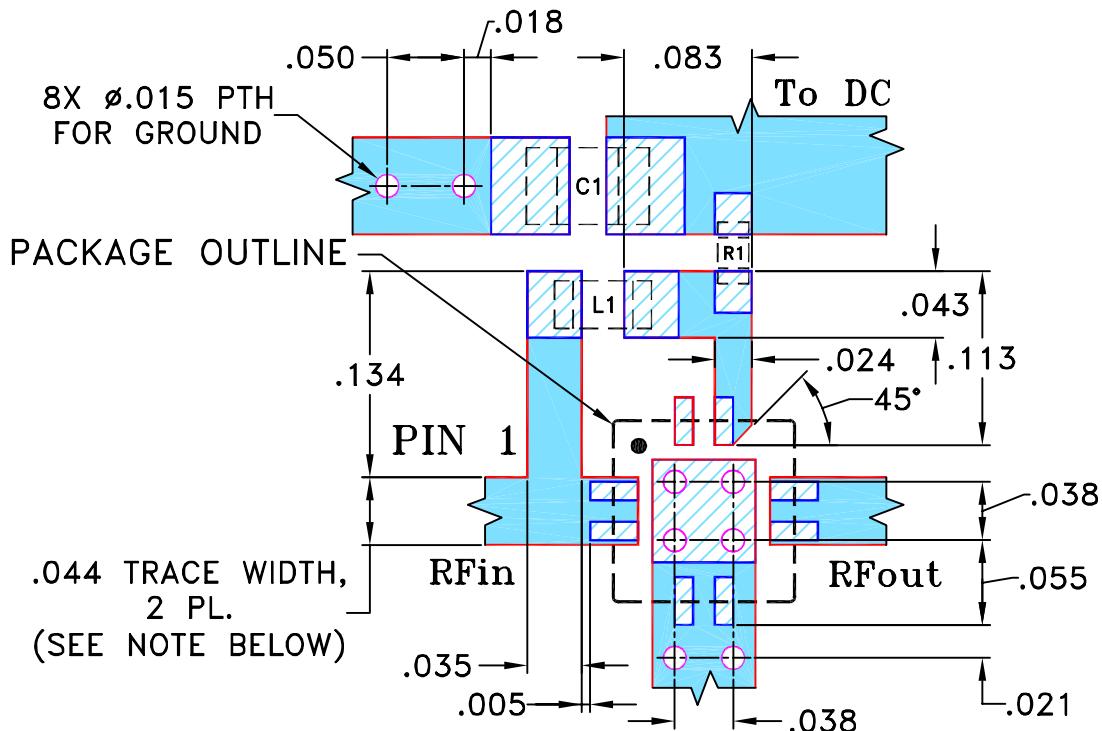

RESISTOR R1: 0402 SIZE

INDUCTOR L1: 0603 SIZE

CAPACITOR C1: 0805 SIZE

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS  $.020" \pm .0015"$ ; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. R1, L1 AND C1 FOOTPRINTS SHOWN FOR REFERENCE ONLY.
3. BOTTOM SIDE OF THE PCB IS CONTINOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	PW
TOLERANCES ON: 2 PL DECIMALS $\pm .005$	CHECKED	IL
3 PL DECIMALS $\pm .005$	APPROVED	TH
ANGLES $\pm 1^\circ$		03/05/09
FRACTIONS $\pm$		


Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.  
EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE  
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY  
DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.  
THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE  
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95


<b>Mini-Circuits®</b> 13 Neptune Avenue Brooklyn NY 11235			
PL, 08AM01, DQ849, TB-501(-X)+			
SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-299	REV: B
FILE: 98PL299	SCALE: 8:1	SHEET: 1 OF 1	

# Evaluation Board and Circuit

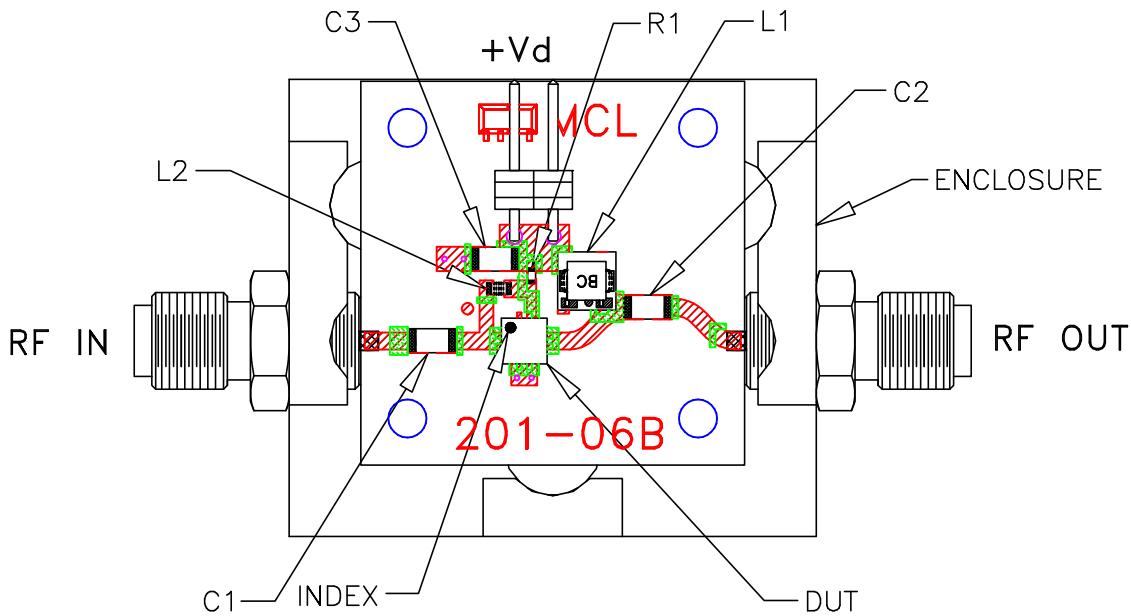

TB-501+

+Vd \*

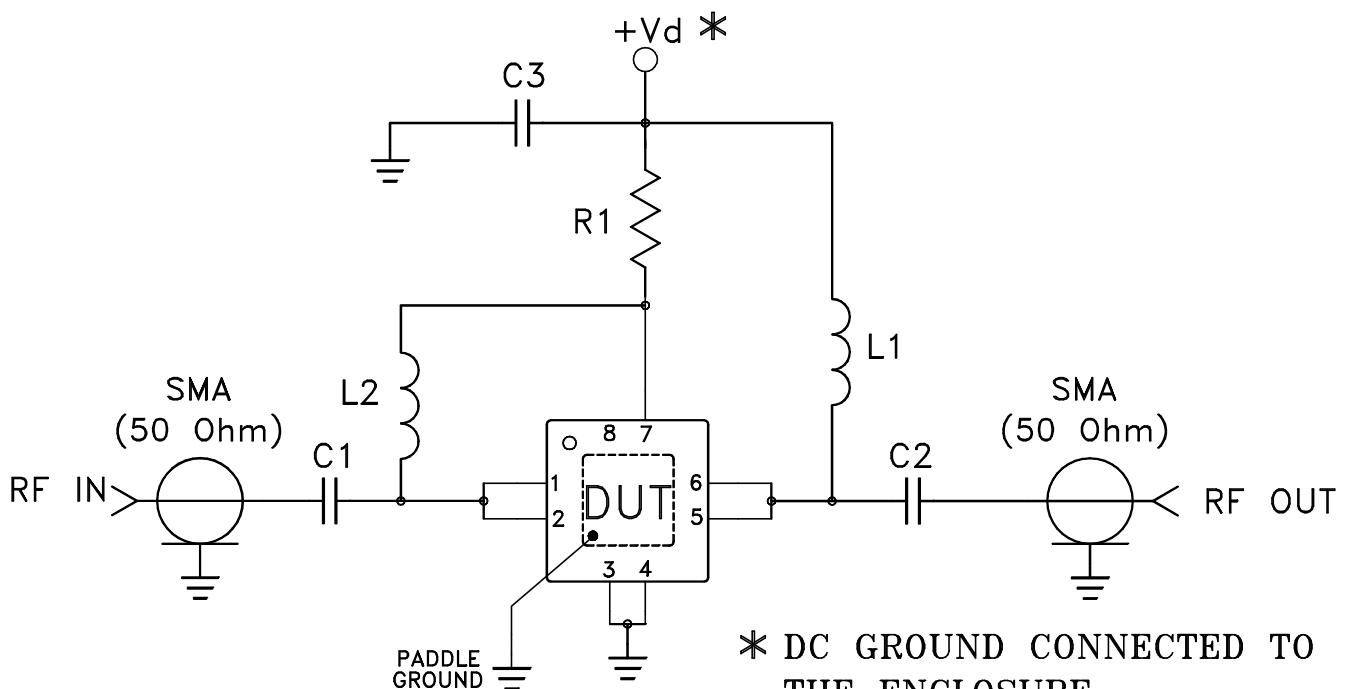

COMPONENT	VALUE/PART NUMBER
DUT	Mini-Circuits PMA-545+
C1, C2, C3	0.1 uF
L1	Mini-Circuits TCCH-80+
L2	390 nH
R1	432 Ohm

## Notes:

## Schematic Diagram

1. 50 Ohm SMA Female connectors.
2. PCB Material: RO4350 or equivalent,  
Dielectric Constant=3.5, Thickness=.020 inch.

 Mini-Circuits®



## Environmental Specifications

## ENV08T1

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C or -45° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C or -65° to 150° Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Mechanical Shock	1.5Kg, 0.5 ms, 5 shock pulses, Y1 direction only	MIL-STD-883, Method 2002, Condition B, except Y1 direction only
Vibration (Variable Frequency)	50g peak	MIL-STD-883, Method 2007, Condition B
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102, Condition C
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 260°C peak	J-STD-020
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + propylene glycol monomethyl ether +	MIL-STD-202, Method 215



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
	monoethanolamine at 63°C to 70°C	