
**SM34** 

## **Outline Dimensions**

## **PCB Land Pattern**

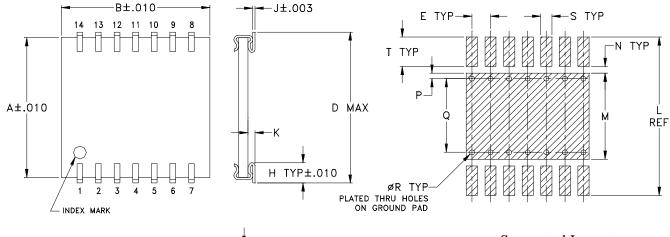

Suggested Layout, Tolerance to be within ±.002

ADJACENT GROUND PINS SHALL BE CONNECTED TO EACH OTHER AND TO GROUND PAD

CASE #	A	В	С	D	Е	F	G	Н	J	K	L	M	N
SM34	.380	.400	.070	.420	.050	.015	.050	.060	.006	.020	.430	.234	.018
	(9.65)	(10.16)	(1.78)	(10.67)	(1.27)	(0.38)	(1.27)	(1.52)	(0.15)	(0.51)	(10.92)	(5.94)	(0.46)

CASE #	P	Q	R	S	T	WT. GRAM
SM34	.015 (0.38)	.200 (5.08)	.014 (0.36)	.030 (0.76)	.080 (2.03)	.3

Dimensions are in inches (mm). Tolerances:  $\pm$  .005

## **Notes:**

1. Case material: Ceramic.

2. Termination finish:

For RoHS Case Styles: Tin plate over Nickel plate.

For RoHS-5 Case Styles: Tin-Lead plate.



INTERNET http://www.minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified