


Tape & Reel Packaging TR-F99

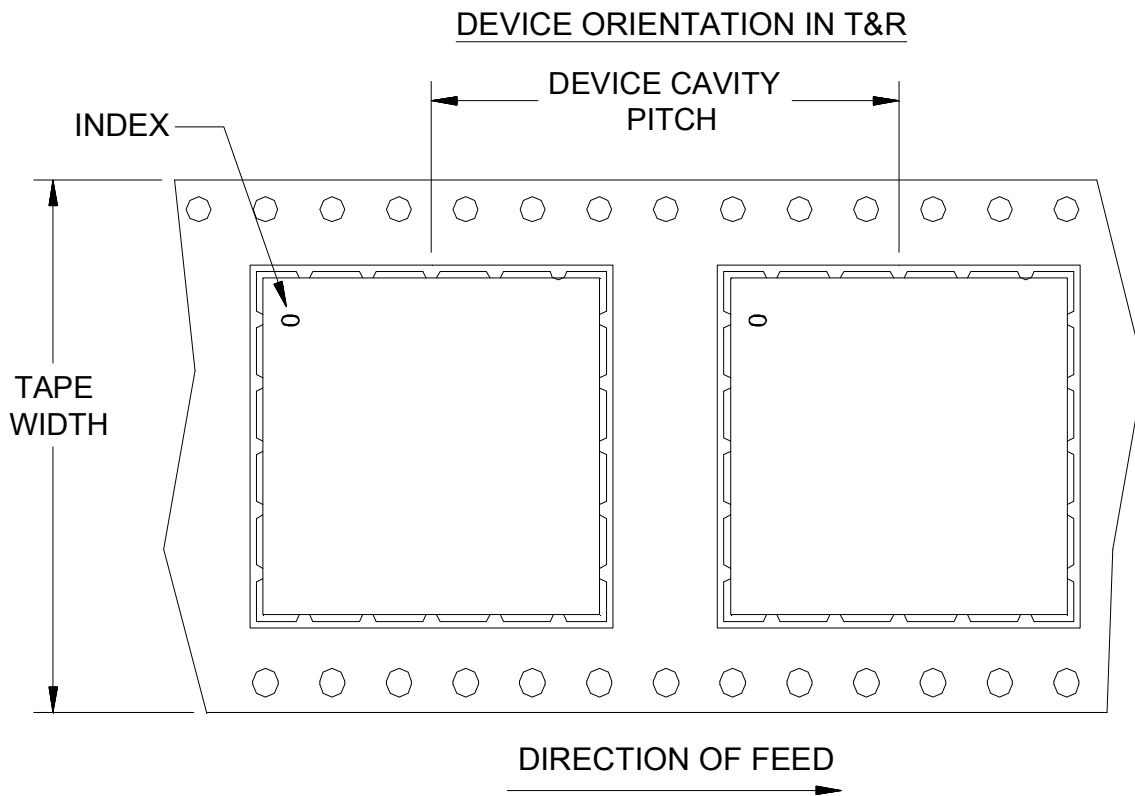

| Tape Width, mm | Device Cavity Pitch, mm | Reel Size, inches | Devices per Reel |
|----------------|-------------------------|-------------------|------------------|
| 44 | 32 | 13 | 125 |

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



Mini-Circuits[®]
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
INTERNET <http://www.minicircuits.com>
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Mini-Circuits ISO 9001 & ISO 14001 Certified