



THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M116389	NEW RELEASE (FROM RAVON)	03/08	DK	HH
OR	R71907	NEW RELEASE (FROM RAVON)	03/08	DK	HH

SUGGESTED MOUNTING CONFIGURATION
FOR JK1226 CASE STYLE, "sg" PIN CONNECTION, 75 Ω

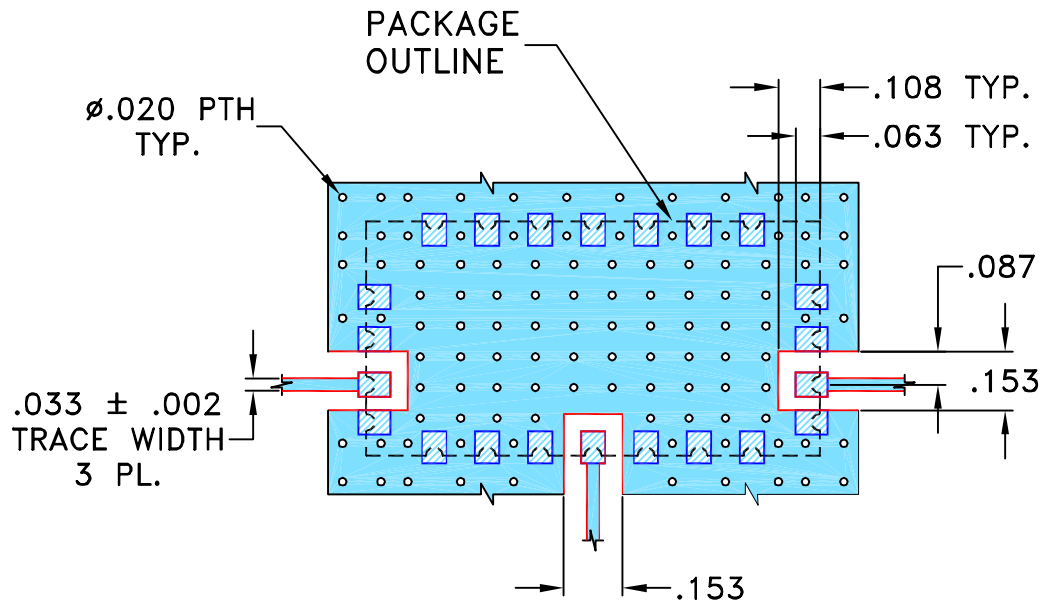

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" \pm .002". COPPER: 1/2 OZ. EACH SIDE.

FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS \pm 3 PL DECIMALS \pm .005ANGLES \pm FRACTIONS \pm

DRAWN

DK (RAVON)

04 MAR 08

CHECKED

RZ (RAVON)

04 MAR 08

APPROVED

HH (RAVON)

04 MAR 08



Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL,sg,JK1226,DPLX,TB-475+,75 Ω

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-286

REV:

OR

FILE:

98PL286

SCALE:

2:1

SHEET:

1 OF 1

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95