



THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M145643	NEW RELEASE	03/11/14	AV	RS


SUGGESTED MOUNTING CONFIGURATION
FOR MT1818 CASE STYLE, "12SW01" PIN CODE

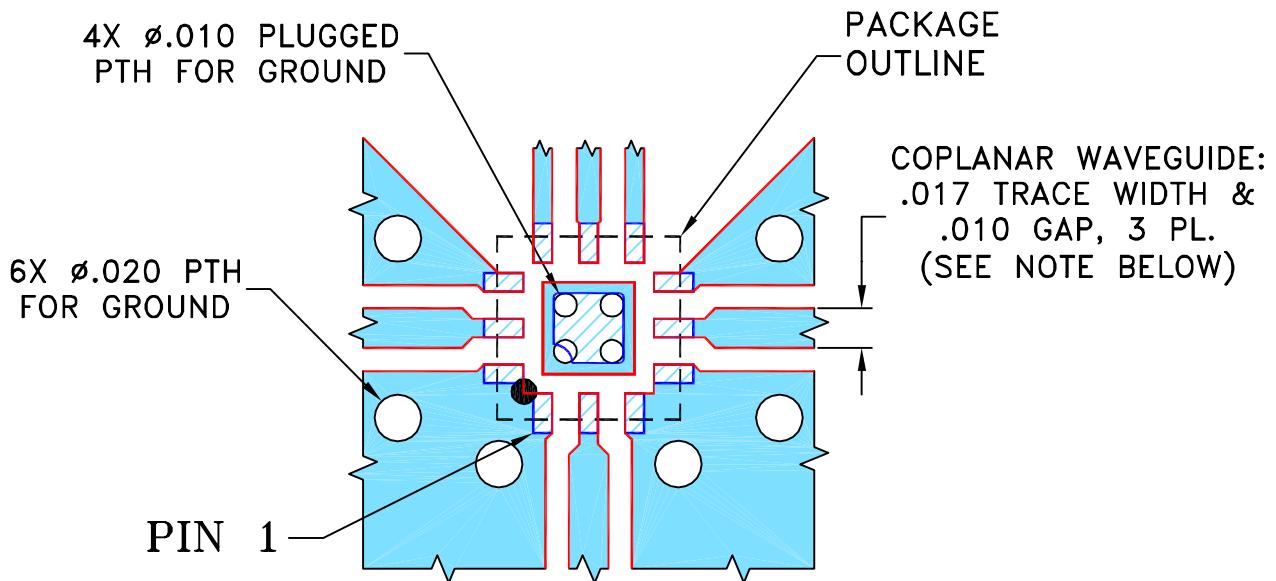NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $.030" \pm .002"$. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

AV

03/11/14

TOLERANCES ON:

CHECKED

IL

03/11/14

2 PL DECIMALS \pm

APPROVED

RS

03/11/14

3 PL DECIMALS $\pm .005$ ANGLES \pm FRACTIONS \pm 

Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, 12SW01, 75, MT1818, TB-723-F+

SIZE A CODE IDENT 15542 DRAWING NO: 98-PL-415 REV: OR

FILE: 98PL415 SCALE: 12:1 SHEET: 1 OF 1

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.
EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY
DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.
THESE CONTENTS SHALL NOT BE USED, DUPLICATED, OR DISCLOSED TO ANY OUTSIDE
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEET1.DWG REV:A DATE:01/12/95