

# Frequency Synthesizer

KSN-3075A-119+

50Ω 2975 to 3045 MHz

## The Big Deal

- Fractional N synthesizer
- Low phase noise and spurious
- Robust design and construction
- Small size 0.80" x 0.58" x 0.24"



CASE STYLE: DK1182

## Product Overview

The KSN-3075A-119+ is a Frequency Synthesizer, designed to operate from 2975 to 3045 MHz for WiMAX 3.5GHz application. The KSN-3075A-119+ is packaged in a metal case (size of 0.80" x 0.58" x 0.24") to shield against unwanted signals and noise.

## Key Features

Feature	Advantages
Low phase noise and spurious: <ul style="list-style-type: none"><li>• Phase Noise: -96 dBc/Hz typ. @ 10 kHz offset</li><li>• Step Size Spurious: -98 dBc typ.</li><li>• Comparison Spurious: -92 dBc typ.</li><li>• Reference Spurious: -92 dBc typ.</li></ul>	Low phase noise and spurious improve system EVM (Error Vector Magnitude).
Robust design and construction	To enhance the robustness of KSN-3075A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.
Small size, 0.80" x 0.58" x 0.24"	The small size enables the KSN-3075A-119+ to be used in compact designs.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)

# Frequency Synthesizer

KSN-3075A-119+

50Ω 2975 to 3045 MHz

## Features

- Fractional N synthesizer
- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+5V, VCC PLL=+3V)
- Small size 0.80" x 0.58" x 0.24"



CASE STYLE: DK1182

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


## Applications

- WiMAX 3.5GHz

## General Description

The KSN-3075A-119+ is a Frequency Synthesizer, designed to operate from 2975 to 3045 MHz for WiMAX 3.5GHz application. The KSN-3075A-119+ is packaged in a metal case (size of 0.80" x 0.58" x 0.24") to shield against unwanted signals and noise. To enhance the robustness of KSN-3075A-119+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.

## Simplified Schematic

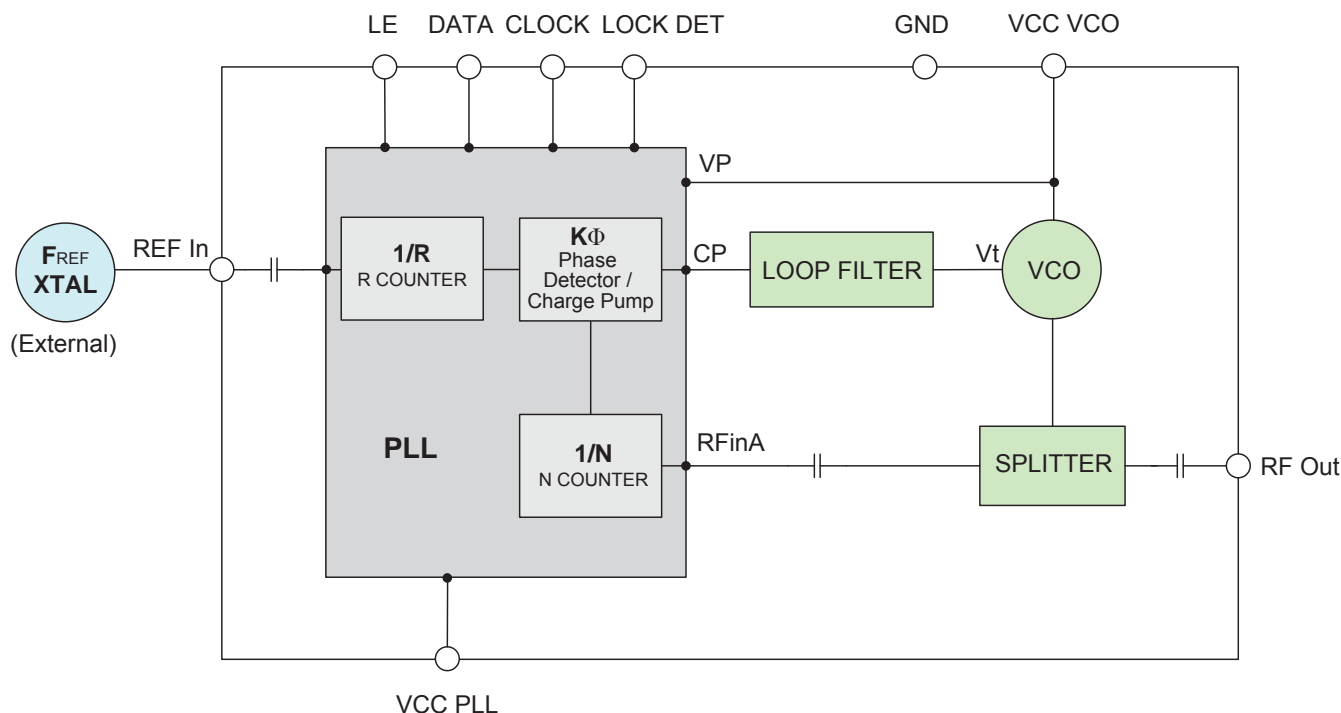

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B  
 M151108  
 EDR-8753/1A  
 KSN-3075A-119+  
 Category-A3  
 RAV  
 151007  
 Page 2 of 11

**Electrical Specifications** (over operating temperature -40°C to +85°C)

Parameters		Test Conditions	Min.	Typ.	Max.	Units
Frequency Range		-	2975	-	3045	MHz
Step Size		-	-	250	-	kHz
Comparison Frequency		-	-	20	-	MHz
Settling Time		Within $\pm 1$ kHz	-	6	-	mSec
Output Power		-	0	+3	+6	dBm
SSB Phase Noise	@ 100 Hz offset	-	-	-76	-	dBc/Hz
	@ 1 kHz offset	-	-	-91	-83	
	@ 10 kHz offset	-	-	-96	-92	
	@ 100 kHz offset	-	-	-124	-120	
	@ 1 MHz offset	-	-	-144	-140	
Integrated SSB Phase Noise		@ 1 kHz to 5.5 kHz	-	-46	-43	dBc
Step Size Spurious Suppression		Step Size 250 kHz	-	-98	-82	dBc
0.5 Step Size Spurious Suppression		0.5 Step Size 125 kHz	-	-83	-65	
Reference & Comparison Spurious Suppression		Ref. & Comp. Freq. 20 MHz	-	-92	-70	
Non - Harmonic Spurious Suppression		-	-	-90	-	
Harmonic Suppression		-	-	-30	-23	V
VCO Supply Voltage		+5.00	+4.90	+5.00	+5.10	
PLL Supply Voltage		+3.00	+2.85	+3.00	+3.15	
VCO Supply Current		-	-	45	52	mA
PLL Supply Current		-	-	15	23	
Reference Input (External)	Frequency	20 (square wave)	-	20	-	MHz
	Amplitude	1	-	1	-	V <sub>P-P</sub>
	Input impedance	-	-	100	-	K $\Omega$
	Phase Noise @ 1 kHz offset	-	-	-145	-	dBc/Hz
RF Output port Impedance		-	-	50	-	$\Omega$
Input Logic Level	Input high voltage	-	2.55	-	-	V
	Input low voltage	-	-	-	0.55	V
Digital Lock Detect	Locked	-	2.45	-	3.15	V
	Unlocked	-	-	-	0.40	V
Frequency Synthesizer PLL		-	ADF4153			
PLL Programming		-	3-wire serial 3V CMOS			
Register Map @ 3045 MHz	R0_Register	-	(MSB) 1001100000000001010000 (LSB)			
	R1_Register	-	(MSB) 101000100000101000001 (LSB)			
	R2_Register	-	(MSB) 1111100010 (LSB)			
	R3_Register	-	(MSB) 1111000111 (LSB)			

**Absolute Maximum Ratings**

Parameters	Ratings
VCO Supply Voltage	5.6V
PLL Supply Voltage	4.0V
VCO Supply Voltage to PLL Supply Voltage	-0.3V to +5.8V
Reference Frequency Voltage	-0.3Vmin, VCC PLL +0.3Vmax
Data, Clock, LE Levels	-0.3Vmin, VCC PLL +0.3Vmax
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Permanent damage may occur if any of these limits are exceeded

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



**Typical Performance Data**

FREQUENCY (MHz)	POWER OUTPUT (dBm)			VCO CURRENT (mA)			PLL CURRENT (mA)		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
2975	2.96	2.68	1.89	44.04	45.87	47.18	13.45	15.16	17.50
2983	3.00	2.71	1.96	44.02	45.91	47.18	13.32	15.04	17.35
2992	3.04	2.76	2.03	44.03	45.91	47.17	13.48	15.20	17.52
3001	3.08	2.77	1.99	44.04	45.90	47.25	13.16	14.87	17.17
3010	3.04	2.76	2.06	44.02	45.90	47.16	13.53	15.26	17.58
3019	2.92	2.68	2.00	44.03	45.89	47.15	13.20	14.92	17.22
3028	2.81	2.57	1.90	44.02	45.88	47.14	13.45	15.19	17.50
3037	2.72	2.45	1.83	43.99	45.90	47.13	13.34	15.07	17.38
3045	2.76	2.42	1.79	43.97	45.87	47.12	13.39	15.11	17.44

FREQUENCY (MHz)	HARMONICS (dBc)					
	F2			F3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
2975	-35.01	-45.20	-52.91	-30.98	-38.29	-35.29
2983	-34.62	-45.52	-51.53	-31.97	-38.26	-36.11
2992	-34.64	-46.04	-51.93	-31.99	-37.98	-36.08
3001	-34.94	-46.24	-49.47	-32.78	-38.21	-36.18
3010	-34.85	-45.90	-49.50	-33.54	-39.27	-37.03
3019	-34.80	-45.72	-49.15	-33.41	-39.64	-37.55
3028	-35.32	-46.70	-46.47	-33.45	-39.33	-37.79
3037	-36.38	-48.69	-44.92	-34.22	-39.27	-38.44
3045	-37.08	-50.20	-44.61	-34.49	-39.05	-38.54

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	+25°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
2975	-82.56	-91.56	-97.12	-125.19	-145.66
2983	-82.35	-92.48	-96.78	-125.69	-145.64
2992	-81.51	-92.39	-96.65	-125.21	-145.56
3001	-81.98	-92.02	-96.44	-125.33	-145.56
3010	-81.65	-91.59	-96.34	-125.30	-145.38
3019	-80.93	-91.93	-95.72	-125.13	-145.59
3028	-83.11	-91.24	-96.87	-125.32	-145.64
3037	-81.73	-90.12	-96.52	-125.28	-145.36
3045	-81.34	-90.37	-96.33	-125.14	-145.36

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	-45°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
2975	-80.88	-89.79	-97.49	-125.41	-146.19
2983	-80.62	-90.21	-97.01	-125.39	-145.26
2992	-80.30	-89.76	-96.89	-125.47	-145.94
3001	-79.15	-89.75	-96.63	-125.39	-145.75
3010	-79.25	-89.17	-96.22	-125.32	-145.64
3019	-80.81	-88.20	-96.56	-125.19	-145.76
3028	-79.49	-89.80	-96.60	-125.07	-145.49
3037	-79.15	-88.54	-96.15	-125.13	-145.53
3045	-79.80	-89.72	-96.35	-125.20	-145.45

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @OFFSETS				
	+85°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
2975	-82.23	-93.37	-97.07	-124.60	-144.71
2983	-82.16	-93.59	-96.92	-124.54	-144.72
2992	-80.93	-92.56	-96.47	-124.61	-144.85
3001	-82.34	-93.29	-96.38	-124.46	-144.77
3010	-81.99	-93.67	-96.42	-124.64	-144.46
3019	-81.29	-93.53	-96.15	-124.38	-144.51
3028	-82.26	-92.73	-96.57	-124.62	-144.57
3037	-82.13	-92.93	-96.14	-124.55	-144.67
3045	-81.43	-93.90	-96.93	-124.43	-144.78

Notes  
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

REFERENCE & COMPARISON SPURIOUS ORDER  n	REFERENCE & COMPARISON SPURIOUS @Fcarrier 2975MHz+(n*Freference) (dBc) note 1			REFERENCE & COMPARISON SPURIOUS @Fcarrier 3010MHz+(n*Freference) (dBc) note 1			REFERENCE & COMPARISON SPURIOUS @Fcarrier 3045MHz+(n*Freference) (dBc) note 1		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
-5	-98.22	-96.45	-101.73	-98.66	-94.93	-100.28	-98.94	-96.08	-98.10
-4	-96.73	-92.94	-94.89	-95.68	-93.07	-93.84	-96.14	-93.89	-92.85
-3	-100.44	-95.70	-97.28	-98.09	-97.26	-94.21	-95.98	-94.90	-93.78
-2	-107.56	-106.37	-100.76	-113.24	-104.22	-100.71	-109.26	-101.61	-99.87
-1	-87.48	-91.38	-87.97	-88.58	-90.74	-88.49	-90.22	-92.56	-88.94
0 <sup>note 2</sup>	-	-	-	-	-	-	-	-	-
+1	-91.57	-94.20	-88.35	-95.28	-92.75	-90.12	-97.83	-95.40	-92.09
+2	-101.07	-105.54	-98.25	-104.73	-98.53	-100.16	-105.90	-99.86	-97.66
+3	-106.91	-100.08	-100.39	-104.52	-103.60	-98.08	-107.11	-101.39	-97.51
+4	-96.45	-95.72	-94.59	-97.94	-96.13	-93.83	-101.69	-94.67	-96.60
+5	-95.08	-98.65	-96.43	-96.15	-93.91	-97.81	-105.28	-95.17	-96.91

Note 1: Comparison frequency = reference frequency = 20 MHz

Note 2: All spurs are referenced to carrier signal (n=0).

STEP SIZE SPURIOUS ORDER  n	0.5 STEP SIZE & STEP SIZE SPURIOUS @Fcarrier 2975MHz+(n*Fstep size) (dBc) note 3			0.5 STEP SIZE & STEP SIZE SPURIOUS @Fcarrier 3010MHz+(n*Fstep size) (dBc) note 3			0.5 STEP SIZE & STEP SIZE SPURIOUS @Fcarrier 3045MHz+(n*Fstep size) (dBc) note 3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
-5.0	-108.74	-111.32	-111.44	-110.76	-115.58	-108.55	-114.50	-112.84	-114.06
-4.5	-110.96	-112.69	-109.06	-109.26	-109.25	-111.76	-109.52	-108.79	-111.31
-4.0	-114.54	-115.33	-112.88	-112.88	-113.10	-114.23	-113.54	-110.54	-112.14
-3.5	-112.81	-113.91	-110.36	-106.03	-110.45	-107.49	-111.48	-109.46	-109.13
-3.0	-111.39	-109.44	-112.04	-111.16	-113.46	-112.31	-108.76	-106.94	-111.83
-2.5	-111.98	-109.17	-109.91	-110.54	-108.98	-107.30	-106.52	-104.56	-112.50
-2.0	-93.91	-99.75	-97.01	-97.82	-103.86	-105.92	-104.43	-101.75	-109.36
-1.5	-102.47	-101.19	-105.70	-101.49	-107.41	-100.72	-101.94	-104.47	-101.84
-1.0	-98.26	-94.60	-98.91	-97.54	-100.48	-97.48	-97.47	-100.47	-99.06
-0.5	-83.95	-86.44	-85.46	-84.35	-83.29	-84.03	-86.67	-83.57	-86.71
0 <sup>note 4</sup>	-	-	-	-	-	-	-	-	-
+0.5	-84.00	-85.37	-85.18	-86.08	-85.78	-84.71	-84.23	-86.23	-87.54
+1.0	-96.40	-99.58	-97.80	-95.80	-97.83	-99.13	-96.98	-94.83	-94.45
+1.5	-103.86	-106.91	-105.79	-103.32	-106.20	-101.47	-103.08	-102.93	-102.85
+2.0	-95.32	-98.95	-97.00	-100.85	-108.33	-107.14	-104.07	-101.75	-106.69
+2.5	-110.80	-111.52	-111.17	-110.56	-110.47	-109.22	-106.77	-103.45	-107.53
+3.0	-109.58	-112.19	-110.49	-106.49	-112.00	-112.30	-107.60	-109.22	-113.20
+3.5	-109.72	-115.14	-109.49	-106.43	-111.87	-109.28	-111.63	-107.84	-113.09
+4.0	-112.38	-113.47	-112.01	-112.88	-114.26	-113.23	-111.69	-111.37	-113.71
+4.5	-110.93	-113.69	-113.70	-110.12	-104.54	-110.68	-112.39	-107.89	-111.84
+5.0	-111.70	-115.00	-109.93	-111.91	-112.65	-111.46	-112.35	-109.63	-112.79

Note 3: Step size frequency 250 kHz

Note 4: All spurs are referenced to carrier signal (n=0).




**Notes**

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.






B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

Typical Performance Curves

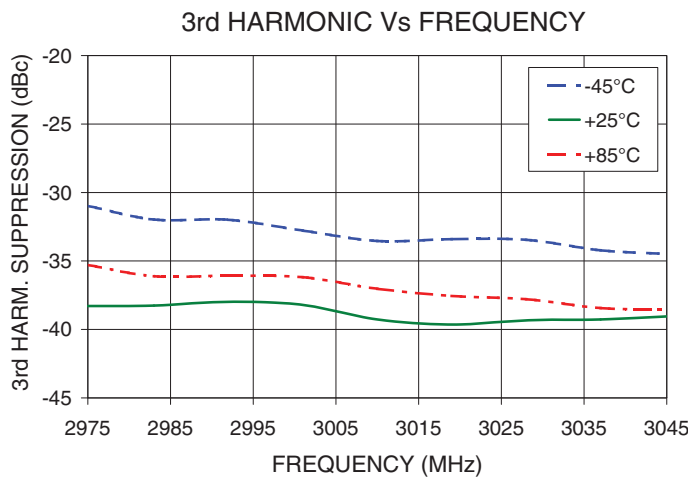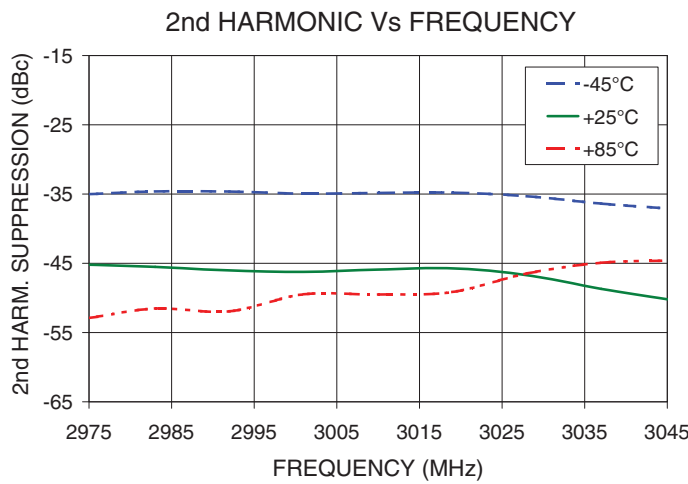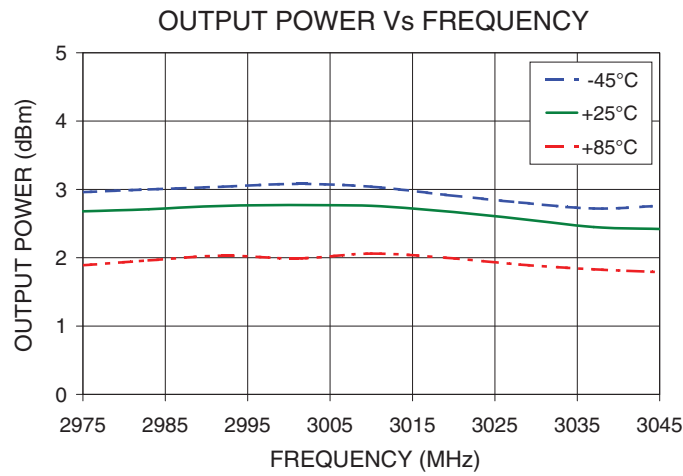


Notes  
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

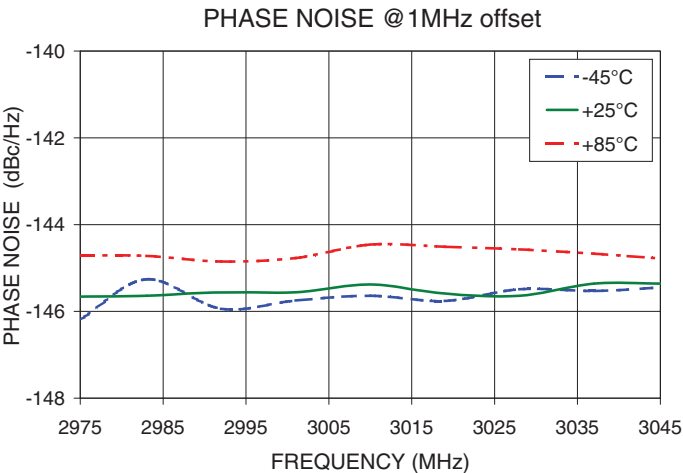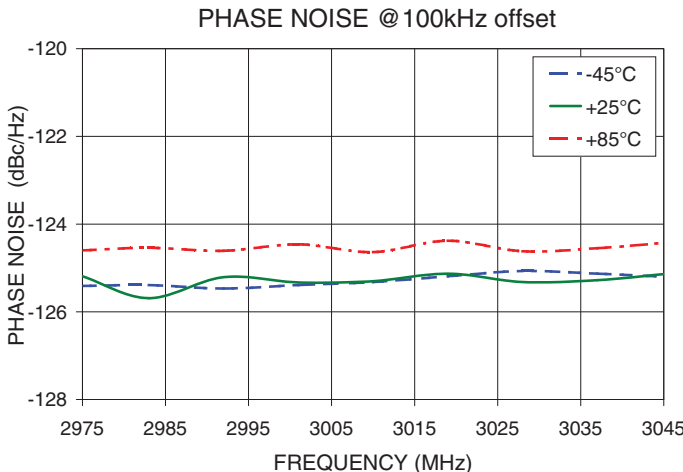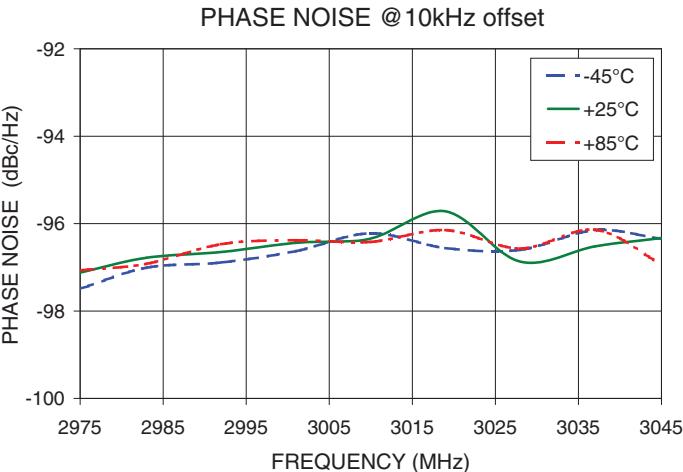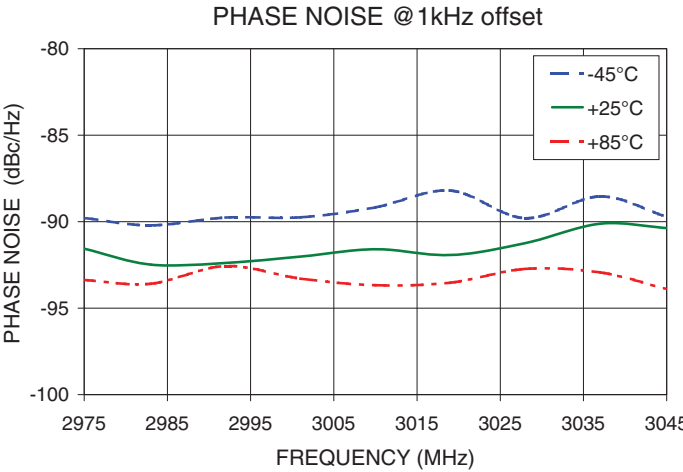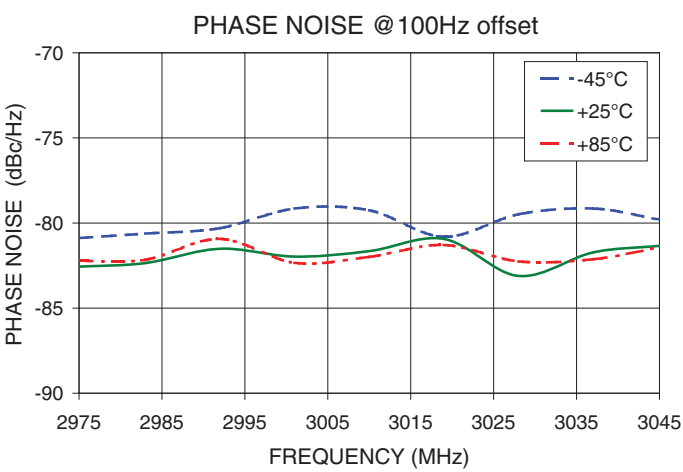


Notes  
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




REFERENCE & COMPARISON SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 2975MHz

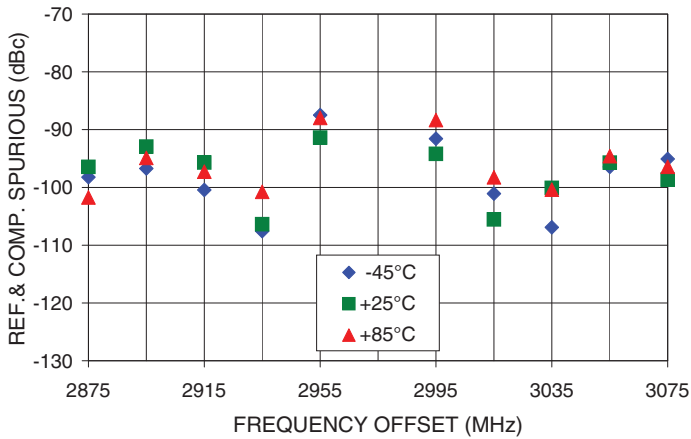


0.5 STEP SIZE & STEP SIZE SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 2975MHz

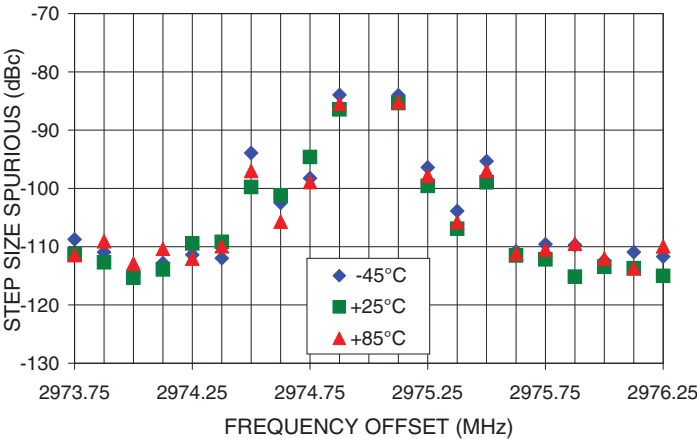


REFERENCE & COMPARISON SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 3010MHz

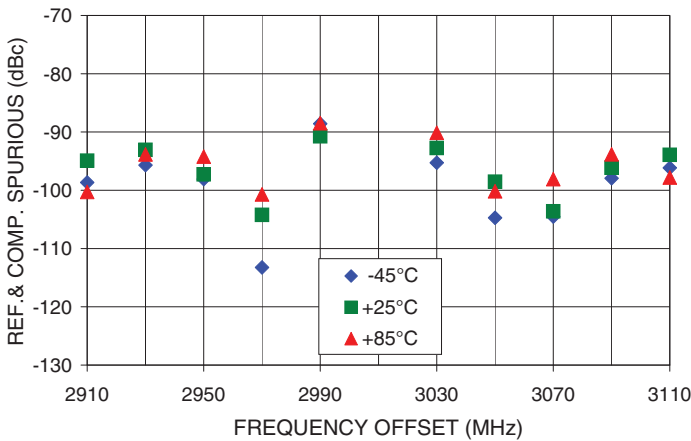


0.5 STEP SIZE & STEP SIZE SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 3010MHz

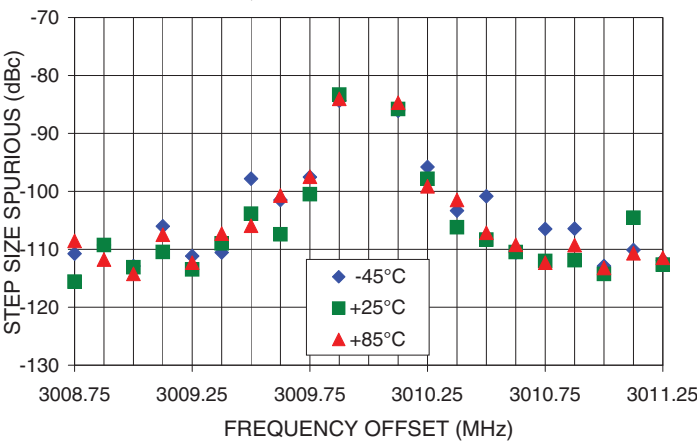

REFERENCE & COMPARISON SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 3045MHz

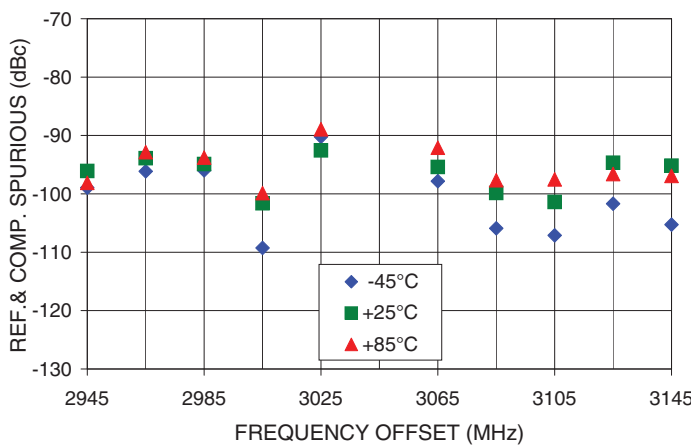


0.5 STEP SIZE & STEP SIZE SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 3045MHz

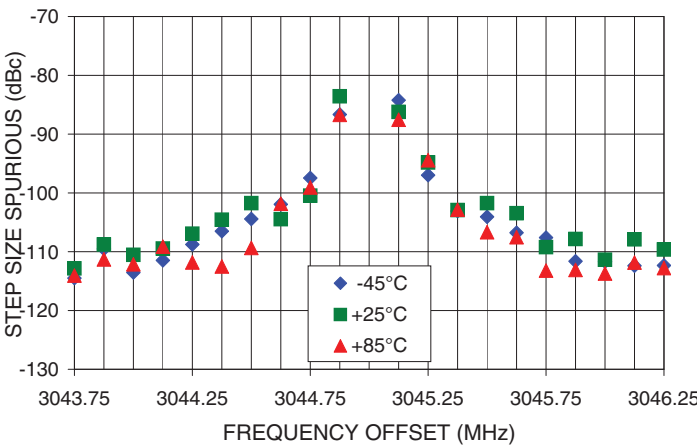


Notes  
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Pin Connection

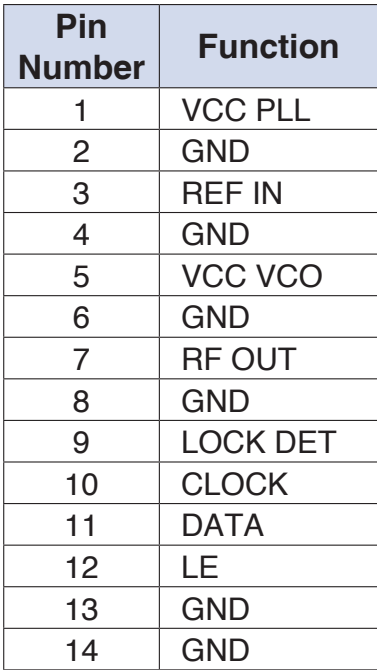

Note: REF IN and RF OUT ports are internally AC coupled.

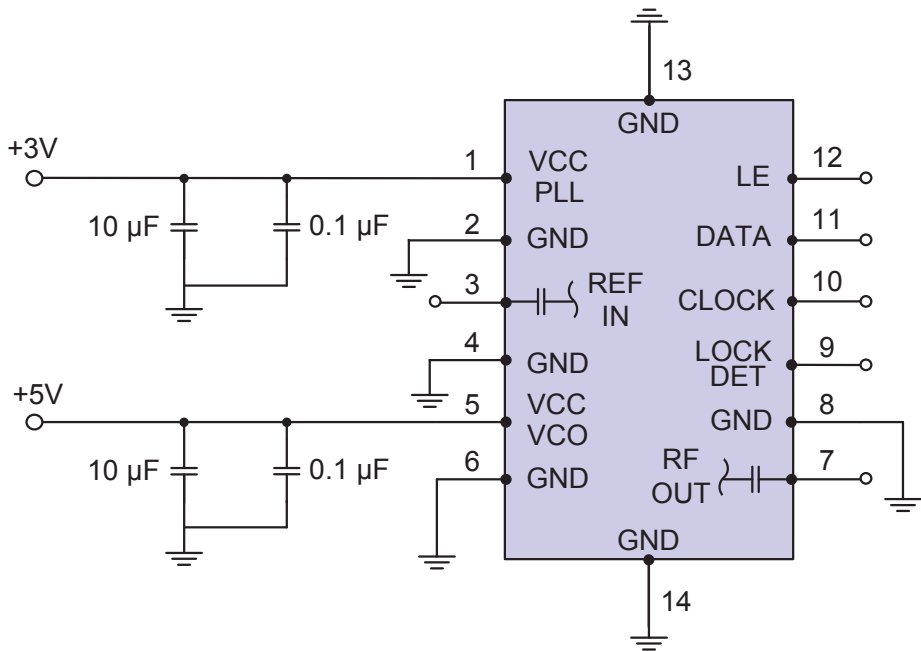


**Notes**

**A.** Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

**B.** Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

**C.** The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCStore/terms.jsp](http://www.minicircuits.com/MCStore/terms.jsp)

## Device Marking

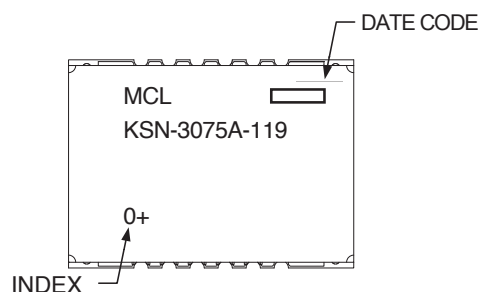

### Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

**Case Style:** DK1182

**Tape & Reel:** TR-F28

**Suggested Layout for PCB Design:** PL-249

**Evaluation Board:** TB-567-2+

**Environment Ratings:** ENV03T2

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

