




FEATURES

- Excellent Power Handling, 8 W
- Small Size
- 7 Sections
- Temperature Stable
- Hermetically Sealed
- LTCC Construction
- Protected by U.S. Patent 6,943,646

APPLICATIONS

- Electronic Warfare (EW)
- Harmonic Rejection
- Transmitters/Receivers
- Lab Use



Generic photo used for illustration purposes only

CASE STYLE: FV1206-4

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

PRODUCT OVERVIEW

Mini-Circuits' LFCN-8440+ is an LTCC low pass filter with a passband from DC to 8440 MHz, supporting a variety of applications. This model provides 1.3 dB passband insertion loss and 30 dB typical stopband rejection. It handles up to 8 W RF input power and provides a wide operating temperature range from -55 to +100°C. Housed in a tiny 1206 ceramic form factor with wraparound terminations, the filter is ideal for dense PCB layouts and with minimal performance variation due to parasitics.

KEY FEATURES

Feature	Advantages
LTCC Construction	Provides repeatable performance in a rugged, ceramic package well suited for tough environments such as high humidity and temperature extremes.
Tiny Size (0.12x0.06x0.04")	Saves space in dense circuit board layouts and minimizes the effects of parasitics.
High Power Handling, 8 W	Supports a wide range of system power requirements.
Wrap-Around Terminations	Provides excellent solderability and easy visual inspection.
Wide Operating Temperature Range, -55 to +100°C	Enables reliable performance in extreme environments.



Mini-Circuits®

CERAMIC

Low Pass Filter

LFCN-8440+

50Ω

DC¹ to 8440 MHzELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	DC-F1	DC-8440	1.3	2.5	dB
	Freq. Cut-Off	F2	9429	3.0		dB
	VSWR	DC-F1	DC-8440	1.7		:1
Stopband	Rejection Loss	F3-F4	10900-11500	20	30	dB
		F4-F5	11500-21850	25	33	
	VSWR	F3-F6	10900-21850	30		:1

1. In Application where DC voltage is present at either input or output ports, de-coupling capacitors are required.


2. Measured on Mini-Circuits Characterization Test Board TB-LFCN-8440+.

ABSOLUTE MAXIMUM RATINGS


Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input ³	8 W max. at +25°C

3. Passband rating, derate linearly to 3 W at +100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

TYPICAL FREQUENCY RESPONSE

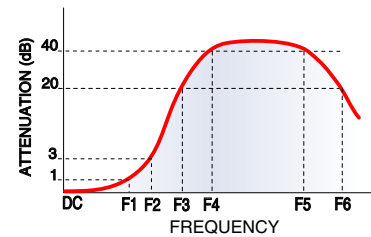

FUNCTIONAL SCHEMATIC

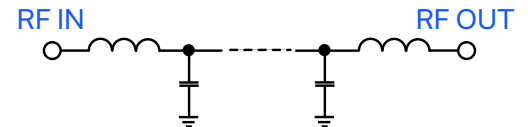



Mini-Circuits

CERAMIC

Low Pass Filter

LFCN-8440+


50Ω DC¹ to 8440 MHz

PIN CONNECTIONS

RF IN	1
RF OUT	3
GROUND	2,4

PRODUCT MARKING: EC

DEMO BOARD MCL P/N: TB-LFCN-8440+
SUGGESTED PCB LAYOUT (PL-487)

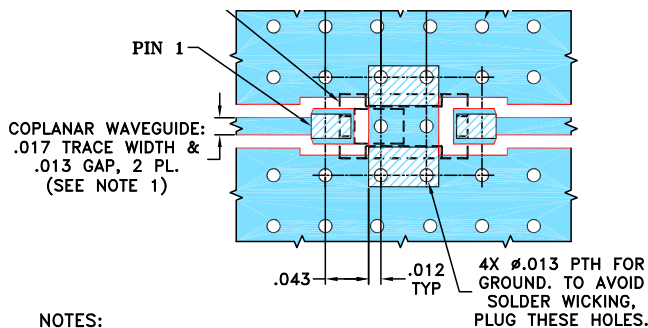


NOTES:


1. TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010" ± .001".
COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

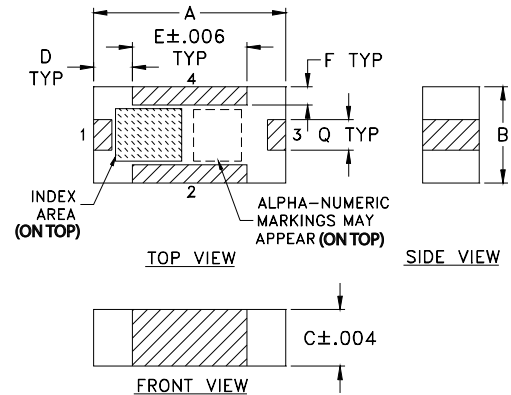

PCB Land Pattern

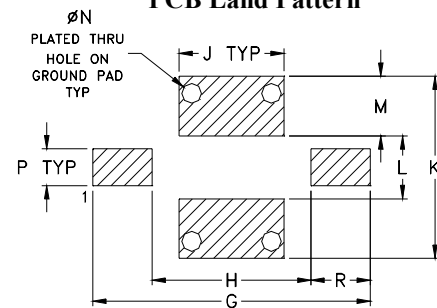

OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F	G	H	J
.126	.063	.037	.026	.075	.012	.182	.104	.069
3.20	1.60	0.94	0.66	1.91	0.30	4.62	2.64	1.75
K	L	M	N	P	Q	R	wt	
.119	.041	.039	.013	.024	.020	.039	grams	
3.02	1.04	0.99	0.33	0.61	0.51	0.99	.020	

TAPE & REEL INFORMATION: F75



CERAMIC

Low Pass Filter

LFCN-8440+


Mini-Circuits

50Ω

DC¹ to 8440 MHz

TYPICAL PERFORMANCE DATA AT +25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
100	0.05	1.02
500	0.11	1.13
1000	0.21	1.29
1500	0.33	1.47
2000	0.46	1.62
3500	0.58	1.67
5000	0.46	1.29
7000	0.66	1.33
8450	1.15	1.62
9450	3.00	2.00
10900	47.97	23.62
11500	35.92	18.66
13000	41.64	36.93
14000	52.15	41.33
15500	50.15	36.77
17000	39.96	41.25
18000	39.06	47.45
19000	37.40	25.30
20000	32.39	34.59
21850	37.07	21.62

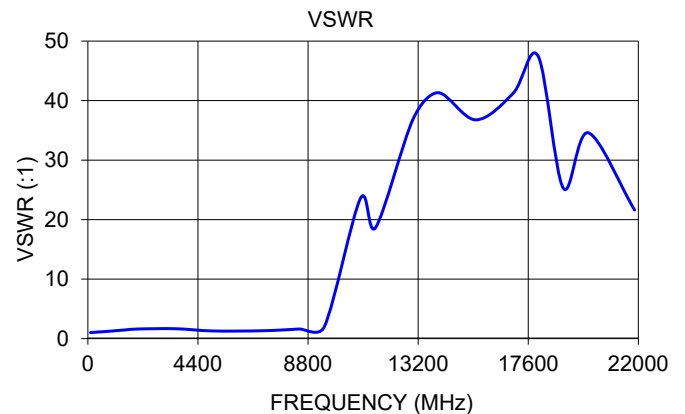

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

