

Non-Catalog Model

Frequency Mixer

Level 7 (LO Power +7 dBm)

LRMS-1WJ

Important Note

This is a non-catalog model and can be manufactured on specific request.
Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : QQQ569


ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency	LO (fL to fU)	2		750	MHz
	RF (fL to fU)	2		750	MHz
	IF	0		750	MHz
Conversion Loss	mid band		5.8	7.5	dB
	Total Range			8.5	dB
LO-RF Isolation	Low Range	45	70		dB
	Mid Range	28	45		dB
	Upper Range	22	38		dB
LO-IF Isolation	Low Range	45	60		dB
	Mid Range	25	40		dB
	Upper Range	20	30		dB
1 dB Comp. Input Power			+1		dBm

Notes: Low Range = [fL to 10fL] Mid Range = [10fL to fU/2] Upper Range = [fU/2 to fU]
 mid band = [2fL to fU/2]

Phase detection, positive polarity.
Aqueous washable.

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Electrical Schematics

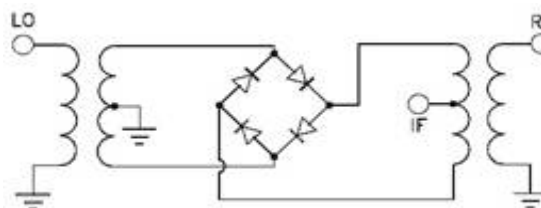

PIN CONNECTIONS	
LO	1
RF	4
IF	5
GROUND	2, 3, 6