


Power Splitter/Combiner

SYPS-2-1

2 Way-0° 50Ω 2 to 500 MHz



CASE STYLE: TTT167

Maximum Ratings


| | |
|-----------------------------|----------------|
| Operating Temperature | -40°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Power Input (as a splitter) | 1W max. |
| Internal Dissipation | 0.125W max. |

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

| | |
|----------|-------|
| SUM PORT | 3 |
| PORT 1 | 1 |
| PORT 2 | 2 |
| GROUND | 4,5,6 |


Outline Drawing

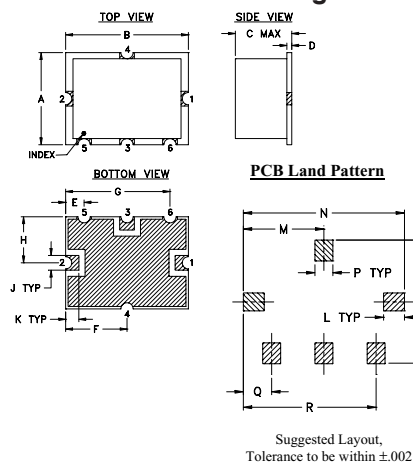

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | H | J | K |
|------|-------|-------|------|------|-------|-------|-------|-------|------|
| .38 | .50 | .23 | .020 | .075 | .250 | .425 | .187 | .050 | .050 |
| 9.65 | 12.70 | 5.84 | 0.51 | 1.91 | 6.35 | 10.80 | 4.75 | 1.27 | 1.27 |
| L | M | N | P | Q | R | S | T | wt. | |
| .070 | .270 | .540 | .060 | .095 | .445 | .208 | .415 | grams | |
| 1.78 | 6.86 | 13.72 | 1.52 | 2.41 | 11.30 | 5.28 | 10.54 | 0.8 | |

Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

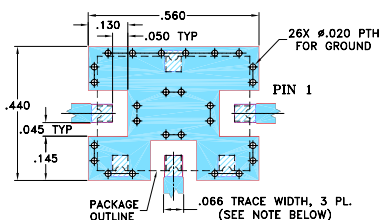

NOTE:

- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wideband, 2 to 500 MHz
- low insertion loss, 0.3 dB typ.
- high isolation, 32 dB typ.

Applications

- VHF/UHF
- communications systems
- receivers & transmitters
- instrumentation

Electrical Specifications




| FREQ. RANGE (MHz) | ISOLATION (dB) | | | | | | INSERTION LOSS (dB) ABOVE 3.0 dB | | | | | | PHASE UNBALANCE (Degrees) | | | AMPLITUDE UNBALANCE (dB) | | |
|--------------------------------|----------------|-----|------|-----|------|-----|----------------------------------|------|------|------|------|------|---------------------------|------|------|--------------------------|------|------|
| | L | | M | | U | | L | | M | | U | | L | M | U | L | M | U |
| f _L -f _U | Typ. | Min | Typ. | Min | Typ. | Min | Typ. | Max. | Typ. | Max. | Typ. | Max. | Max. | Max. | Max. | Max. | Max. | Max. |
| 2-500 | 40 | 20 | 32 | 20 | 30 | 20 | 0.2 | 0.6 | 0.3 | 0.75 | 0.6 | 1.0 | 2.0 | 3.0 | 4.0 | 0.2 | 0.3 | 0.5 |

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]

Typical Performance Data

| Frequency (MHz) | Total Loss ¹ (dB) | | Amplitude Unbalance (dB) | Isolation (dB) | Phase Unbalance (deg.) | VSWR S | VSWR 1 | VSWR 2 |
|-----------------|------------------------------|------|--------------------------|----------------|------------------------|--------|--------|--------|
| | S-1 | S-2 | | | | | | |
| 2.84 | 3.12 | 3.12 | 0.00 | 36.81 | 0.01 | 1.02 | 1.12 | 1.06 |
| 4.47 | 3.11 | 3.12 | 0.00 | 40.46 | 0.02 | 1.02 | 1.11 | 1.05 |
| 7.03 | 3.11 | 3.11 | 0.00 | 44.30 | 0.01 | 1.02 | 1.10 | 1.04 |
| 10.86 | 3.13 | 3.12 | 0.01 | 46.85 | 0.03 | 1.02 | 1.10 | 1.04 |
| 26.91 | 3.13 | 3.14 | 0.00 | 44.74 | 0.07 | 1.03 | 1.10 | 1.04 |
| 49.59 | 3.16 | 3.15 | 0.00 | 41.78 | 0.08 | 1.03 | 1.10 | 1.04 |
| 66.66 | 3.16 | 3.15 | 0.00 | 40.46 | 0.18 | 1.03 | 1.10 | 1.04 |
| 100.87 | 3.17 | 3.17 | 0.00 | 38.79 | 0.28 | 1.04 | 1.09 | 1.04 |
| 149.64 | 3.21 | 3.22 | 0.01 | 37.29 | 0.35 | 1.04 | 1.09 | 1.04 |
| 161.93 | 3.21 | 3.23 | 0.01 | 37.11 | 0.39 | 1.04 | 1.09 | 1.04 |
| 201.16 | 3.22 | 3.25 | 0.03 | 36.51 | 0.47 | 1.05 | 1.08 | 1.03 |
| 249.89 | 3.24 | 3.28 | 0.04 | 36.36 | 0.52 | 1.06 | 1.07 | 1.03 |
| 254.97 | 3.24 | 3.27 | 0.03 | 36.38 | 0.59 | 1.06 | 1.07 | 1.03 |
| 479.07 | 3.30 | 3.50 | 0.20 | 37.41 | 0.80 | 1.18 | 1.10 | 1.10 |
| 498.34 | 3.35 | 3.57 | 0.22 | 35.04 | 0.75 | 1.20 | 1.12 | 1.12 |

1. Total Loss = Insertion Loss + 3dB splitter loss.

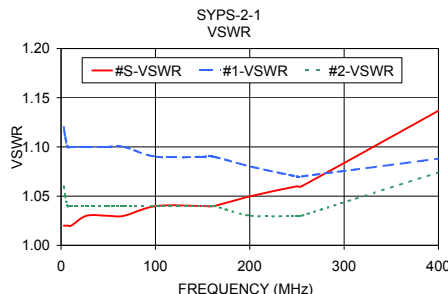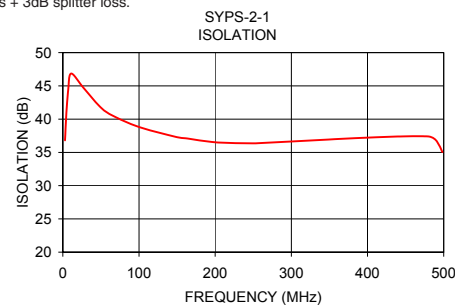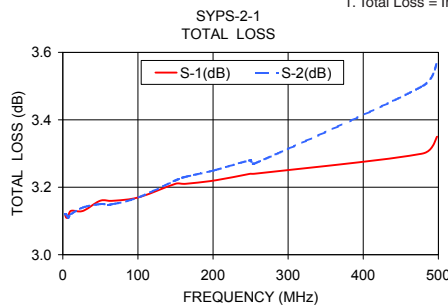

electrical schematic

