

Non-Catalog Model

Power Splitter/Combiner

2 Way-90°

SYPQ-21.4

Important Note

This is a non-catalog model and can be manufactured on specific request.
Pricing and delivery information can be supplied upon request.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : AH202

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency		20		23	MHz
Isolation	20 - 23 MHz	25	33		dB
Insertion Loss					
Average of Coupled Outputs	20 - 23 MHz		0.10	0.40	dB
above 3.0 dB					
Phase Unbalance	20 - 23 MHz		0.123	3.000	deg.
Amplitude Unbalance	20 - 23 MHz		0.339	1.100	dB
VSWR	SUM Port		1.05		(:1)
	OUT Ports		1.04		(:1)

Notes: Matched power rating: 1 Watt.


Internal load dissipation: 0.125 Watt.

Non-hermetic.

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

PIN CONNECTIONS	
SUM PORT	1
PORT 1	5
PORT 2	8
GND EXT	2, 3, 6, 7
50Ω TERMINATION	4

Functional Diagram

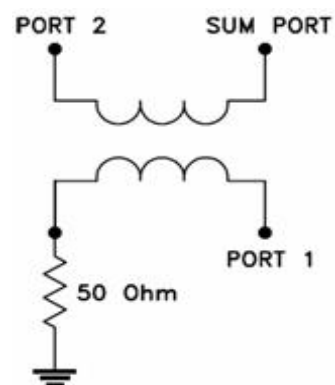

2 Way-90° Power Splitter/Combiner

SYPQ-21.4

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS ¹			AMP. UNBAL. (dB)	ISOLATION (dB) 1-2	PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR		
	S-1	S-2	AVG.					S	1	2
20.00	2.75	3.39	3.07	0.64	39.81	90.13	20.00	1.04	1.04	1.03
20.05	2.76	3.38	3.07	0.62	39.85	90.08	20.05	1.04	1.04	1.03
20.10	2.77	3.36	3.07	0.59	39.76	90.10	20.10	1.04	1.04	1.03
20.15	2.78	3.36	3.07	0.57	39.70	90.11	20.15	1.04	1.04	1.03
20.20	2.79	3.34	3.07	0.55	39.71	90.09	20.20	1.04	1.04	1.03
20.25	2.79	3.33	3.06	0.54	39.74	90.10	20.25	1.04	1.04	1.03
20.30	2.82	3.32	3.07	0.51	39.71	90.14	20.30	1.04	1.04	1.03
20.35	2.82	3.30	3.06	0.48	39.64	90.14	20.35	1.04	1.04	1.03
20.40	2.83	3.30	3.07	0.47	39.67	90.12	20.40	1.04	1.04	1.03
20.45	2.85	3.29	3.07	0.45	39.69	90.12	20.45	1.04	1.04	1.03
20.50	2.85	3.28	3.07	0.43	39.59	90.09	20.50	1.04	1.04	1.03
20.55	2.86	3.27	3.07	0.41	39.72	90.15	20.55	1.04	1.04	1.03
20.60	2.87	3.25	3.06	0.38	39.63	90.12	20.60	1.04	1.04	1.03
20.65	2.88	3.25	3.07	0.37	39.72	90.09	20.65	1.04	1.04	1.03
20.70	2.89	3.23	3.06	0.34	39.58	90.12	20.70	1.04	1.04	1.03
20.75	2.90	3.22	3.06	0.32	39.55	90.10	20.75	1.05	1.04	1.03
20.80	2.91	3.21	3.06	0.30	39.58	90.14	20.80	1.04	1.04	1.03
20.85	2.92	3.21	3.07	0.29	39.56	90.12	20.85	1.05	1.04	1.03
20.90	2.93	3.19	3.06	0.26	39.64	90.14	20.90	1.05	1.04	1.04
20.95	2.94	3.18	3.06	0.24	39.45	90.16	20.95	1.05	1.04	1.03
21.00	2.95	3.17	3.06	0.22	39.50	90.10	21.00	1.05	1.04	1.04
21.10	2.97	3.16	3.07	0.19	39.46	90.10	21.10	1.05	1.04	1.04
21.20	2.99	3.13	3.06	0.14	39.43	90.11	21.20	1.05	1.04	1.03
21.30	3.01	3.10	3.06	0.09	39.46	90.15	21.30	1.05	1.04	1.04
21.40	3.03	3.09	3.06	0.06	39.42	90.14	21.40	1.05	1.04	1.04
21.50	3.04	3.07	3.06	0.03	39.36	90.11	21.50	1.05	1.04	1.04
21.60	3.06	3.04	3.05	0.01	39.34	90.11	21.60	1.05	1.04	1.04
21.70	3.08	3.02	3.05	0.07	39.24	90.16	21.70	1.05	1.04	1.04
21.80	3.10	3.00	3.05	0.10	39.23	90.14	21.80	1.05	1.04	1.04
21.90	3.13	2.98	3.06	0.15	39.16	90.17	21.90	1.05	1.04	1.04
22.00	3.14	2.96	3.05	0.18	39.19	90.14	22.00	1.05	1.04	1.04
22.10	3.16	2.94	3.05	0.22	39.18	90.11	22.10	1.05	1.04	1.04
22.20	3.18	2.93	3.06	0.25	39.15	90.13	22.20	1.05	1.04	1.04
22.30	3.21	2.91	3.06	0.30	39.14	90.16	22.30	1.05	1.04	1.04
22.40	3.22	2.89	3.06	0.33	39.08	90.16	22.40	1.05	1.04	1.04
22.50	3.23	2.87	3.05	0.37	39.14	90.11	22.50	1.05	1.04	1.04
22.60	3.26	2.85	3.06	0.41	38.98	90.11	22.60	1.05	1.04	1.04
22.70	3.27	2.83	3.05	0.44	39.07	90.12	22.70	1.05	1.04	1.04
22.80	3.31	2.82	3.07	0.49	38.97	90.13	22.80	1.05	1.04	1.04
22.90	3.33	2.80	3.07	0.52	38.91	90.14	22.90	1.05	1.04	1.04
23.00	3.34	2.78	3.06	0.55	38.92	90.07	23.00	1.05	1.04	1.04






¹ Total Loss = Insertion Loss+ 3dB Splitter Loss

REV. X2
SYPQ-21.4
100705
Page 1 of 1

2 Way-90° Power Splitter/Combiner


SYPQ-21.4

Typical Performance Curves

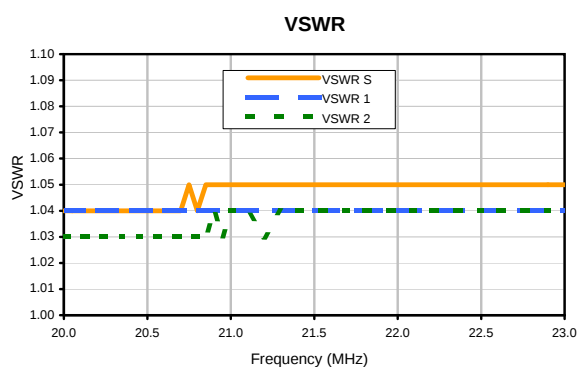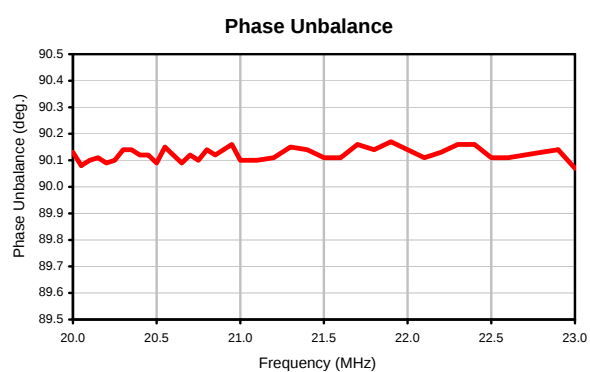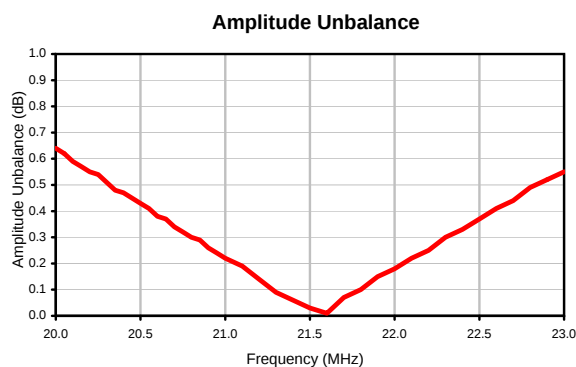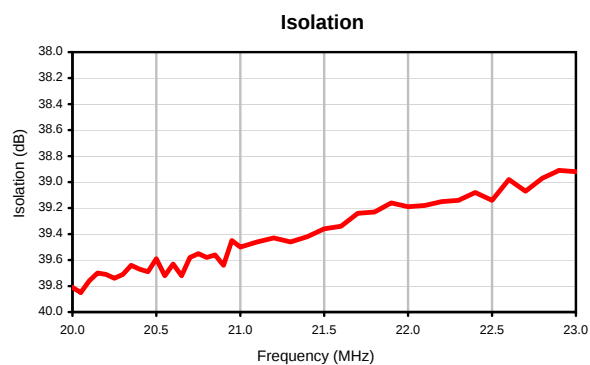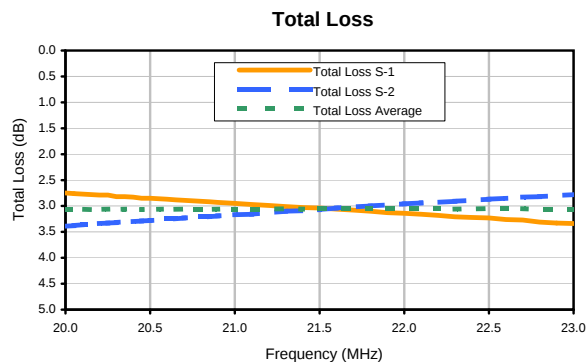

Outline Dimensions

AH202

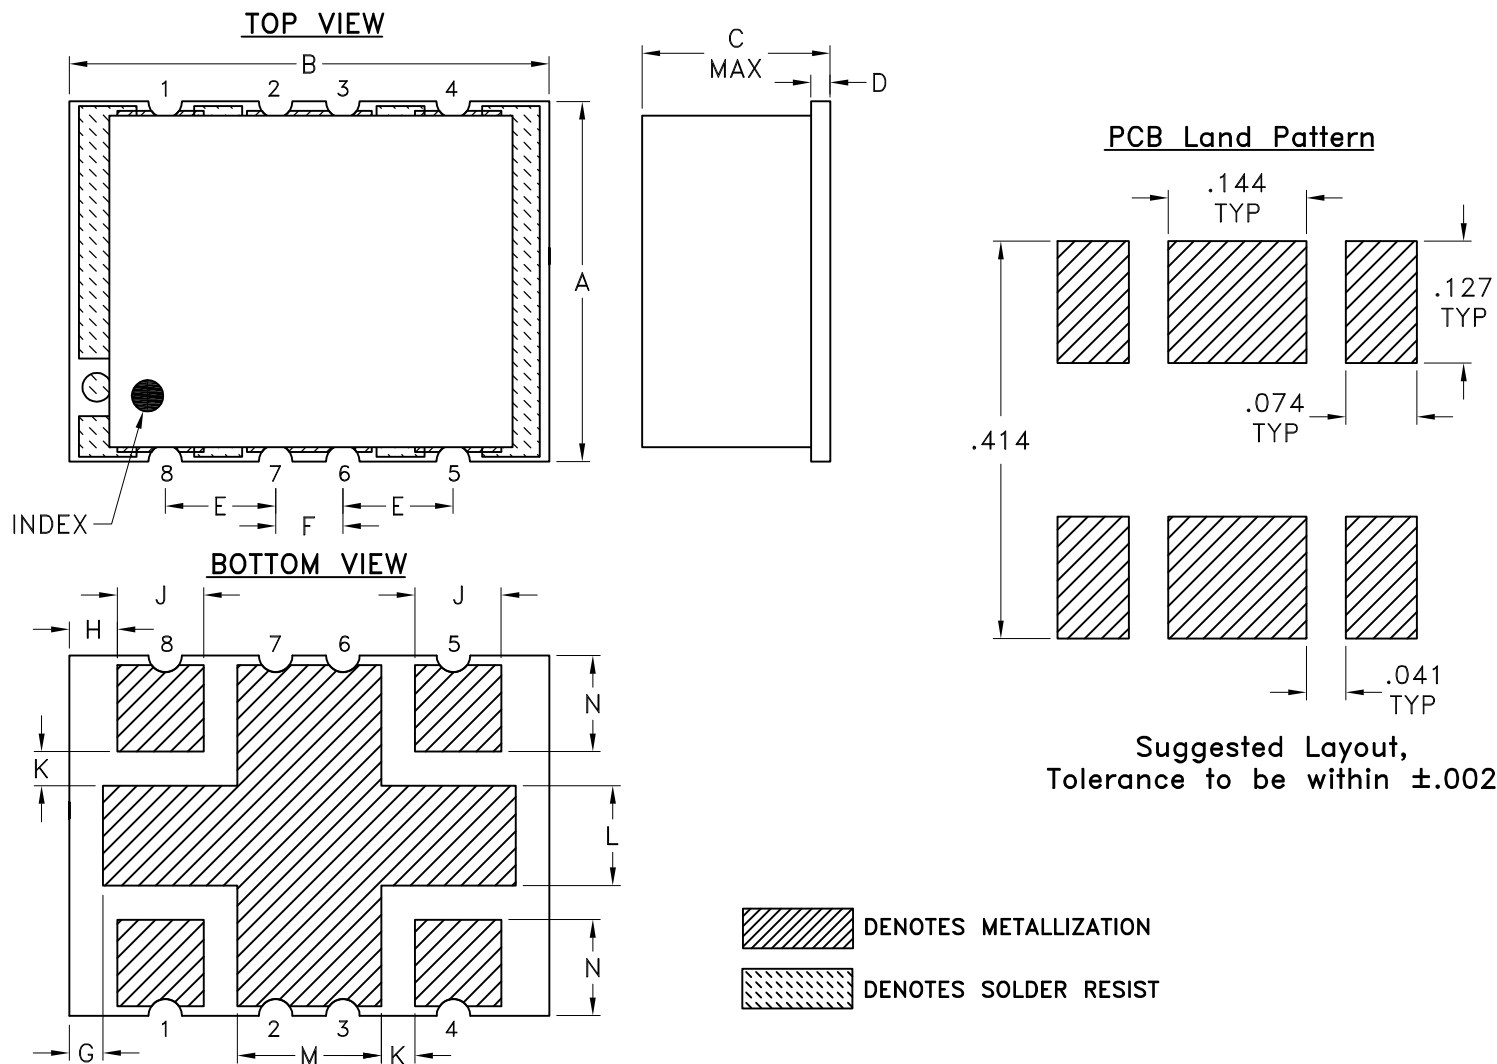

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N	WT, GRAM
AH202	.38 (9.65)	.50 (12.70)	.25 (6.35)	.020 (0.51)	.115 (2.92)	.070 (1.78)	.035 (0.89)	.050 (1.27)	.090 (2.29)	.040 (1.02)	.105 (2.67)	.140 (3.56)	.095 (2.41)	.80

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Base material: Printed wiring laminate.
- Termination finish:
 - For RoHS 3-5 μ inch (.08-.13 microns) Gold over 120-240 μ inch (3.05-6.10 microns) Nickel plate.
 - All models, (+) suffix.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Mini-Circuits
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F61

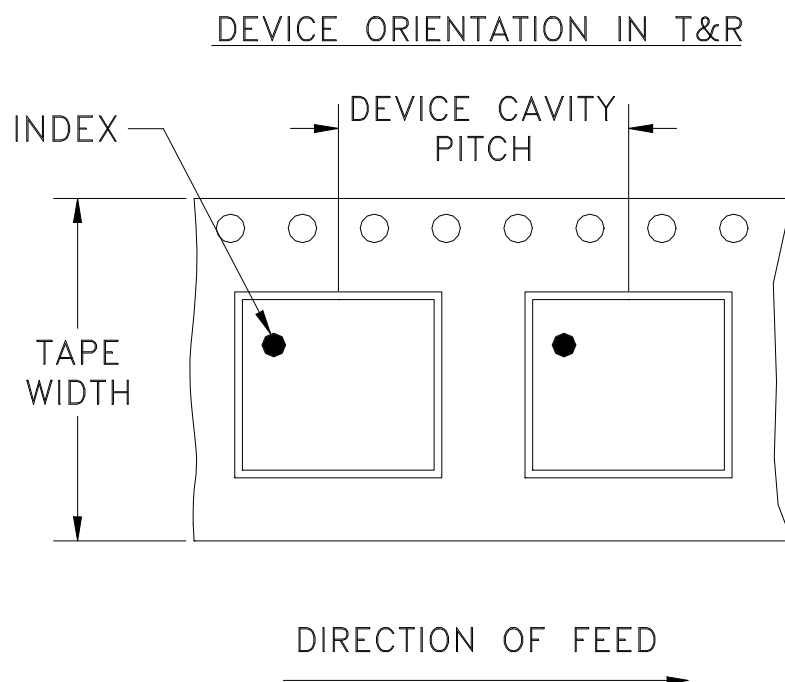

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
24	12	13	200

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M103787	NEW RELEASE (FROM RAVON)	03/06	RZ	HH
A	M121588	UPDATE GROUND PLANE	02/09	EM	KN
A	R75766	UPDATE GROUND PLANE	02/09	EM	KN

SUGGESTED MOUNTING CONFIGURATION
FOR HE1135 CASE STYLE, qg PIN CONNECTION, 75 OHM

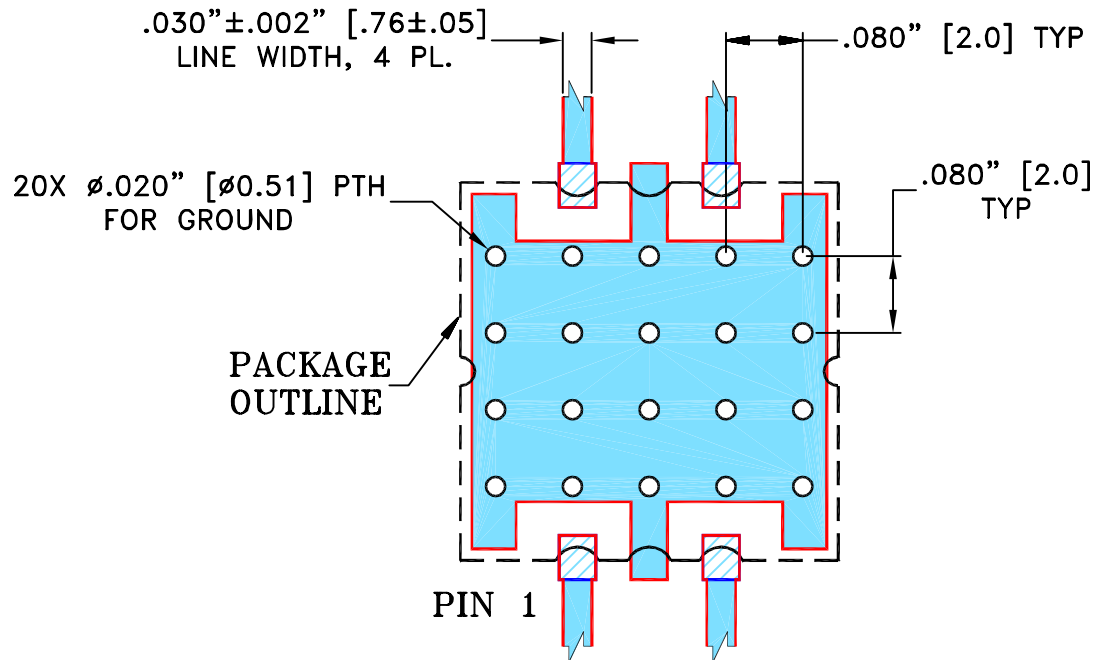**NOTE:**

1. TRACE WIDTH IS SHOWN FOR R04350 WITH DIELECTRIC THICKNESS. $.030'' \pm .002''$. COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

RZ (RAVON)

2 MAR 06

TOLERANCES ON:

CHECKED

RZ (RAVON)

2 MAR 06

2 PL DECIMALS ± .005

APPROVED

HH (RAVON)

2 MAR 06

ANGLES ±

FRACTIONS ±

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95



Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL, qg, HE1135, TB-381, 75 OHM

SIZE
A

CODE IDENT
15542

DRAWING NO:
98-PL-238


REV:
A

FILE: 98PL238


SCALE: 5:1

SHEET: 1 OF 1

Evaluation Board and Circuit

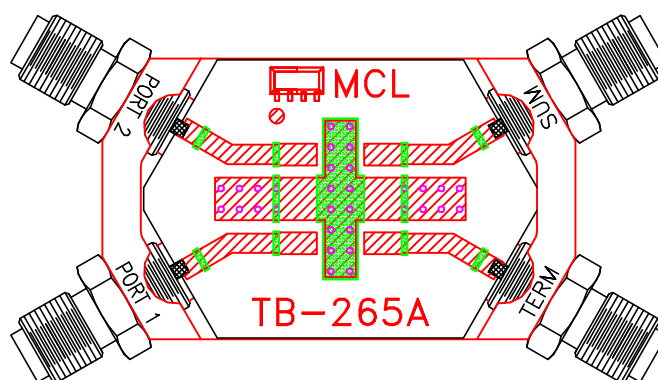

TB-265

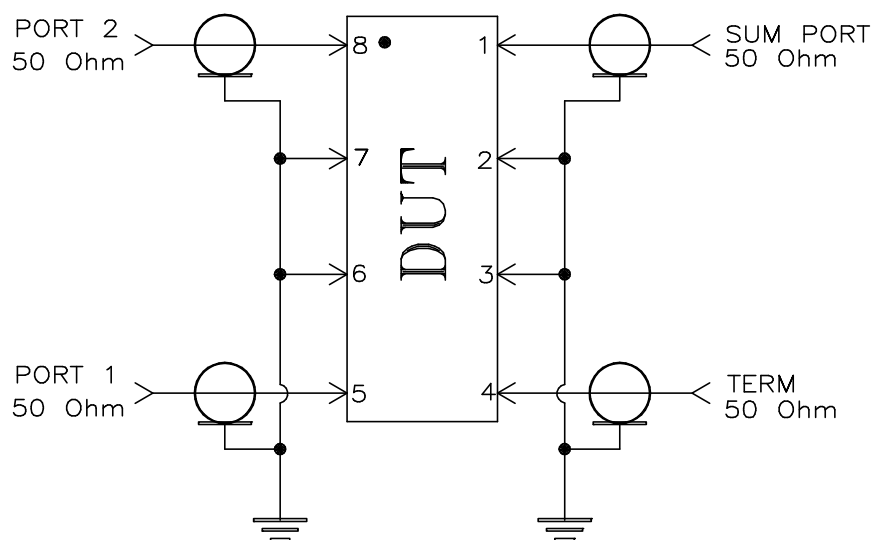

Schematic Diagram

Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**