

Engineering Development Model

Power Splitter/Combiner

ADP-ED12786/10

2 Way-0°

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : CD636

ELECTRICAL SPECIFICATIONS 75Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency		5		2750	MHz
Isolation	5 - 50 MHz		22		dB
	50 - 1375 MHz		19		dB
	1375 - 2750 MHz		18		dB
Insertion Loss Above 3.0 dB	5 - 50 MHz		0.87		dB
	50 - 1375 MHz		0.65		dB
	1375 - 2750 MHz		1.56		dB
Phase Unbalance	5 - 50 MHz		0.010		deg.
	50 - 1375 MHz		0.338		deg.
	1375 - 2750 MHz		7.815		deg.
Amplitude Unbalance	5 - 50 MHz		0.000		dB
	50 - 1375 MHz		0.156		dB
	1375 - 2750 MHz		0.444		dB
VSWR	SUM Port		1.40		(:1)
	OUT Ports		1.40		(:1)

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

PIN CONNECTIONS	
SUM PORT	1
PORT 1	4
PORT 2	3
GND	6
SHORT	2, 5
Pins#2,5 to GND	C1 = C2 = 0.3 pF
Pin 4	L1: 3.3 nH to R1 one side
Pin 3	L2: 3.3 nH to R1 another side
R1	200Ω

Functional Diagram



2 Way-0° Power Splitter/Combiner

ADP-ED12786/10

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS ¹ (dB)		AMP. UNBAL. (dB)	ISOLATION (dB) 1-2	PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
1.0	7.58	7.58	0.00	18.05	0.00	1.0	9.04	5.52	5.52
2.0	4.79	4.79	0.00	18.77	0.02	2.0	3.26	2.89	2.89
3.0	4.13	4.13	0.00	19.72	0.01	3.0	2.15	2.19	2.19
4.0	3.96	3.96	0.00	20.52	0.00	4.0	1.75	1.92	1.92
5.0	3.92	3.92	0.00	21.10	0.00	5.0	1.56	1.80	1.79
6.0	3.90	3.90	0.00	21.52	0.00	6.0	1.45	1.73	1.72
7.0	3.90	3.89	0.00	21.81	0.01	7.0	1.38	1.68	1.68
8.0	3.89	3.89	0.00	21.98	0.01	8.0	1.33	1.65	1.65
9.0	3.88	3.88	0.00	22.08	0.01	9.0	1.30	1.63	1.63
10.0	3.87	3.87	0.00	22.16	0.00	10.0	1.27	1.61	1.61
50.0	3.70	3.70	0.00	21.09	0.04	50.0	1.09	1.52	1.52
100.0	3.64	3.64	0.00	20.67	0.08	100.0	1.08	1.50	1.49
200.0	3.61	3.61	0.01	20.41	0.11	200.0	1.07	1.47	1.47
300.0	3.59	3.62	0.02	20.20	0.14	300.0	1.07	1.45	1.46
400.0	3.58	3.63	0.05	19.91	0.15	400.0	1.07	1.43	1.44
500.0	3.57	3.65	0.08	19.51	0.15	500.0	1.07	1.39	1.41
600.0	3.56	3.68	0.11	19.06	0.08	600.0	1.07	1.35	1.37
700.0	3.55	3.71	0.15	18.62	0.00	700.0	1.07	1.30	1.33
800.0	3.57	3.76	0.20	18.21	0.10	800.0	1.07	1.25	1.29
900.0	3.54	3.79	0.25	17.79	0.30	900.0	1.08	1.21	1.26
1000.0	3.49	3.78	0.30	17.34	0.53	1000.0	1.10	1.17	1.24
1200.0	3.49	3.89	0.40	16.58	1.16	1200.0	1.16	1.10	1.18
1300.0	3.51	3.96	0.46	16.23	1.55	1300.0	1.20	1.06	1.14
1400.0	3.55	4.05	0.51	15.90	2.02	1400.0	1.25	1.05	1.09
1500.0	3.63	4.17	0.54	15.63	2.54	1500.0	1.30	1.09	1.05
1600.0	3.73	4.31	0.58	15.40	3.12	1600.0	1.35	1.14	1.03
1700.0	3.89	4.50	0.61	15.27	3.81	1700.0	1.38	1.20	1.06
1800.0	4.08	4.71	0.63	15.22	4.63	1800.0	1.41	1.25	1.08
1900.0	4.24	4.87	0.63	15.25	5.48	1900.0	1.41	1.28	1.09
2000.0	4.41	5.02	0.61	15.43	6.41	2000.0	1.40	1.31	1.10
2100.0	4.53	5.11	0.58	15.77	7.40	2100.0	1.38	1.33	1.11
2200.0	4.59	5.11	0.52	16.33	8.52	2200.0	1.35	1.34	1.12
2300.0	4.58	5.02	0.44	17.19	9.64	2300.0	1.29	1.35	1.14
2400.0	4.57	4.90	0.33	18.50	10.66	2400.0	1.23	1.36	1.13
2500.0	4.62	4.79	0.16	20.49	11.79	2500.0	1.14	1.33	1.10
2600.0	4.77	4.76	0.02	23.42	12.95	2600.0	1.04	1.27	1.03
2700.0	5.07	4.85	0.22	26.49	13.99	2700.0	1.09	1.19	1.07
2750.0	5.37	5.09	0.28	26.62	14.27	2750.0	1.25	1.17	1.09
2800.0	5.56	5.14	0.42	25.03	14.82	2800.0	1.25	1.11	1.19
2900.0	6.22	5.57	0.65	20.97	15.18	2900.0	1.46	1.02	1.33
3000.0	6.91	5.98	0.94	17.54	15.02	3000.0	1.70	1.05	1.46






¹Total Loss = Insertion Loss + 3dB Splitter Loss



2 Way-0° Power Splitter/Combiner

ADP-ED12786/10

Typical Performance Curves

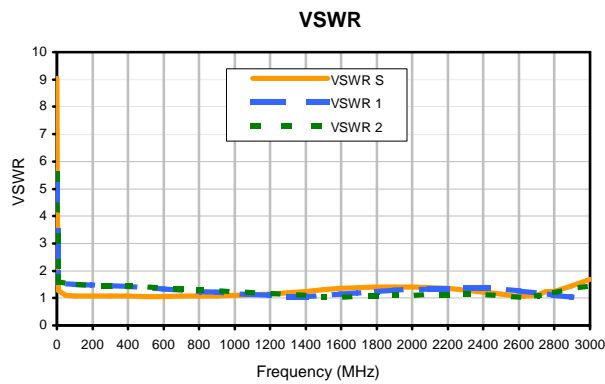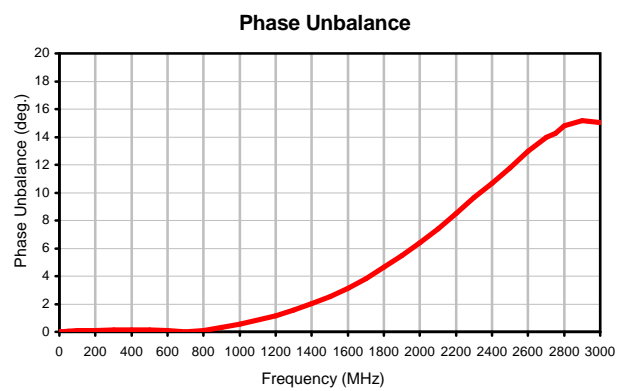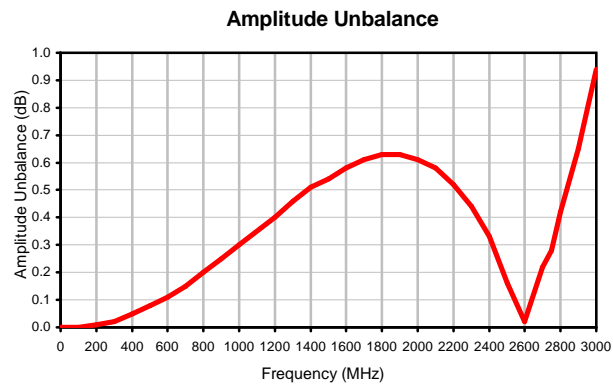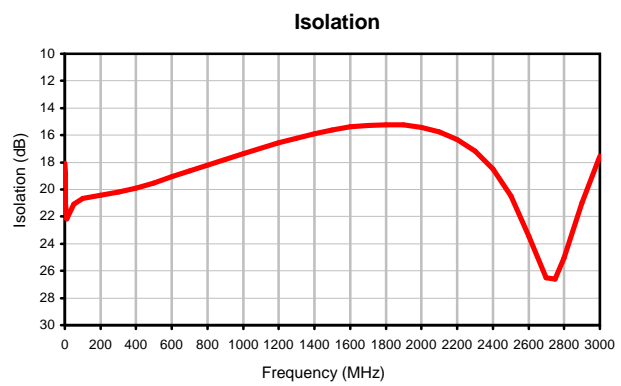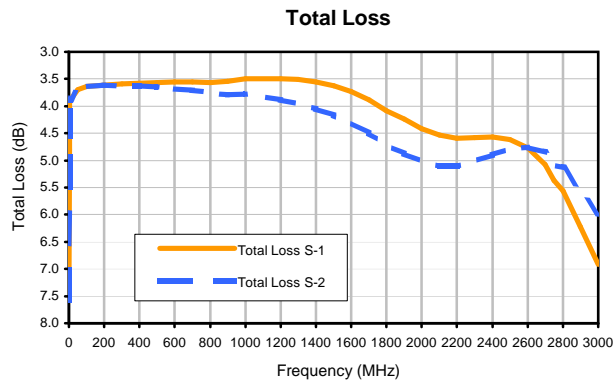

REV. X2
ADP-ED12786/10
100707
Page 1 of 1



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



Case Style

CD

CD541
CD542
CD636
CD637

Outline Dimensions



PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541					.082 (2.08)							.15
CD542	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.112 (2.84)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Case material: Plastic.
- Termination finish:
 - For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Mini-Circuits[®]


INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F34

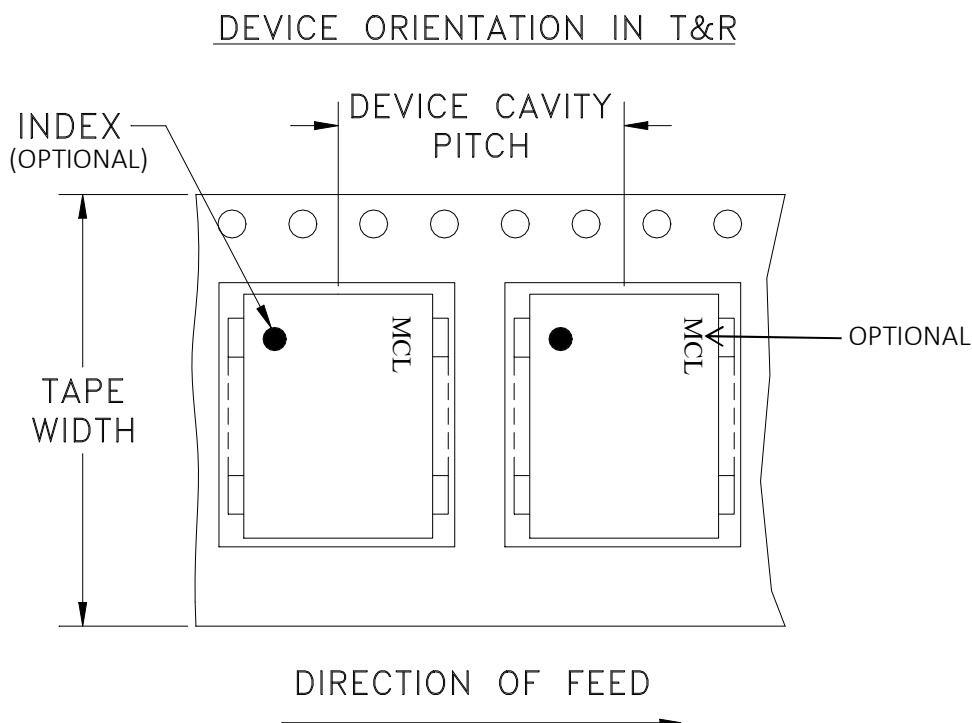

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
			Standard	100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215