MMIC SURFACE MOUNT


Monolithic Amplifier

GALI-55+

50Ω DC to 4 GHz

FEATURES

- Frequency Range, DC to 4 GHz
- InGap HBT Microwave Amplifier
- Miniature SOT-89 Package
- Internally Matched to 50Ω
- Output Power, +15.0 dBm Typ.
- Excellent Package for Heat Dissipation, Exposed Metal Bottom
- Low Thermal Resistance for High Reliability
- Aqueous Washable
- Protected By US Patent 6,943,629



Generic photo used for illustration purposes only

CASE STYLE: DF782

+RoHS Compliant
The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications


APPLICATIONS


- Cellular
- PCS
- Communication Receivers & Transmitters

PRODUCT OVERVIEW

Gali-55+ (RoHS compliant) is a wideband amplifier offering high dynamic range. It has repeatable performance from lot to lot, and is enclosed in a SOT-89 package. It uses patented Transient Protected Darlington configuration and is fabricated using InGaP HBT technology. Expected MTTF is 8,500 years at +85°C case temperature. Gali-55+ is designed to be rugged for ESD and supply switch-on transients.

SIMPLIFIED SCHEMATIC AND PIN DESCRIPTION

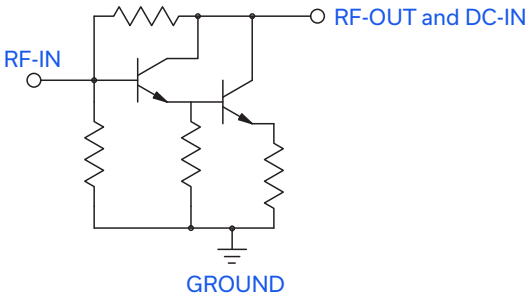

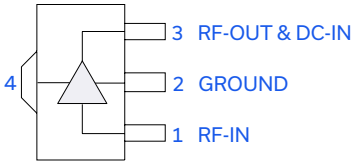

Function	Pin Number	Description
RF-IN	1	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.
RF-OUT and DC-IN	3	RF output and bias pin. DC voltage is present on this pin; therefore a DC blocking capacitor is necessary for proper operation. An RF choke is needed to feed DC bias without loss of RF signal due to the bias connection, as shown in "Recommended Application Circuit".
GND	2,4	Connections to ground. Use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance.

REV. T
ECO-024667
GALI-55+
MCL NY
250225

Monolithic Amplifier

GALI-55+

50Ω DC to 4 GHz

ELECTRICAL SPECIFICATIONS AT +25°C AND 50 mA UNLESS NOTED OTHERWISE

Parameter	Conditions (GHz)	Min.	Typ.	Max.	Units
Frequency Range[1]		DC		4	GHz
Gain	0.1	17	21.9		dB
	1		20.6		
	2		18.5		
	3		17.0		
	4		15.5		
	6		15.7		
Input Return Loss	DC - 3		19		dB
	3 - 4		16.5		
Output Return Loss	DC - 3		17.5		dB
	3 - 4		14		
Output Power @ 1 dB Compression	1	+13.5	+15.0		dBm
Output IP3	1		+28.5		dBm
Noise Figure	1		3.3		dB
Recommended Device Operating Current			50		mA
Device Operating Voltage		+3.8	+4.3	+4.8	V
Device Voltage Variation vs. Temperature at 50 mA			-3.2		mV/°C
Device Voltage Variation vs. Current at +25°C			3.5		mV/mA
Thermal Resistance, Junction-to-Case[2]			100		°C/W

1. Guaranteed specification DC-4 GHz. Low frequency cut off determined by external coupling capacitors.
2. Case is defined as ground leads.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature[3]	-45°C to +85°C
Storage Temperature	-65°C to +150°C
Operating Current	65 mA
Input Power	+13 dBm

3. Based on typical case temperature rise +3°C above ambient.


Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation.

Monolithic Amplifier

GALI-55+

50Ω DC to 4 GHz


RECOMMENDED APPLICATION CIRCUIT

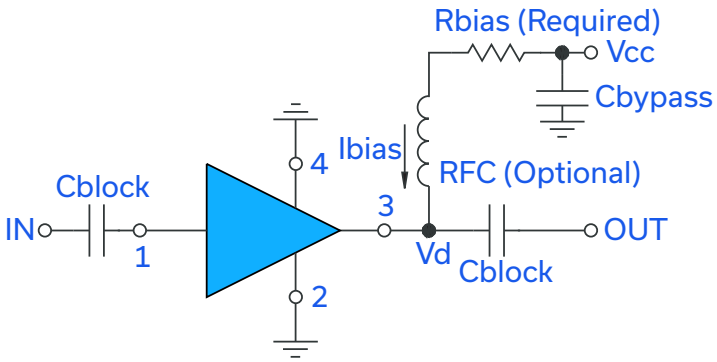

Test Board includes case, connectors, and components (in bold) soldered to PCB

R BIAS	
Vcc	"1%" Res. Values (Ohms) for Optimum Biasing
7	52.3
8	71.5
9	90.9
10	110
11	130
12	150
13	169
14	191
15	215
16	232
17	249
18	274
19	287
20	309

PRODUCT MARKING



Markings in addition to model number designation may appear for internal quality control purposes.

Monolithic Amplifier

GALI-55+

50Ω DC to 4 GHz

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASHBOARD. CLICK HERE

Performance Data & Graphs	Data Table Swept Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DF782 Plastic package, Lead Finish: Matte-tin
Tape & Reel **Standard Quantities Available on Reel**	F55 7" Reels with 20, 50, 100, 200, 500 or 1K devices
Suggested Layout for PCB Design	PL019
Evaluation Board	TB-409-55+
Environmental Ratings	ENV08T2

ESD RATING


Human Body Model (HBM): Class 1B (500 V to < 1000 V) in accordance with ANSI/ESD STM 5.1 - 2001
Machine Model (MM): Class M1 (< 100 V) in accordance with ESD STM 5.2 - 1999

MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDECJ-STD-020C

No.	Test Required	Condition	Standard	Quantity
1	Visual Inspection	Low Power Microscope Magnification 40x	MIP-IN-0003 (MCT spec)	45 units
2	Electrical Test	Room Temperature	SCD (MCL spec)	45 units
3	SAM Analysis	Less than 10% growth in term of delamination	J-Std-020C (Jedec Standard)	45 units
4	Moisture Sensitivity Level 1	Bake at 125°C for 24 hours Soak at 85°C/85%RH for 168 hours Reflow 3 cycles at 260°C peak	J-Std-020C (Jedec Standard)	45 units

MSL TEST FLOW CHART

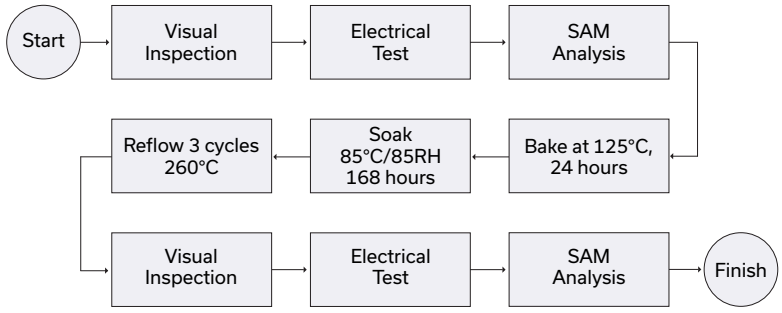

NOTES

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

MMIC Amplifier GALI-55+

Typical Performance Data

NOTE: Use PDF Bookmarks to view DATA at required conditions or to view GRAPHS.

Definitions:
Input Return Loss = -S11 (dB)
Gain(Power Gain) = S21 (dB)
Reverse Isolation = -S12 (dB)
Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 50mA, Vd = 4.49V @Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	23.25	26.05	31.75	26.54	1.05	0.72	30.45	16.38	2.82
100	23.25	26.27	30.62	26.24	1.06	0.71	30.12	16.49	2.97
200	23.12	26.15	30.29	25.15	1.06	0.70	30.59	16.32	2.85
300	22.99	26.22	29.76	24.40	1.06	0.69	30.28	16.23	3.03
400	22.85	26.25	29.49	23.43	1.07	0.67	30.19	16.43	2.94
500	22.70	26.12	29.30	22.70	1.07	0.67	29.89	16.42	2.93
600	22.52	26.05	29.30	22.18	1.08	0.66	29.94	16.32	2.88
700	22.35	26.04	28.43	21.41	1.08	0.65	30.37	16.24	2.95
800	22.15	25.94	28.09	21.12	1.09	0.64	30.38	16.30	2.97
900	21.94	25.93	27.00	20.82	1.10	0.63	30.61	16.34	2.94
1000	21.74	25.89	26.68	20.41	1.10	0.62	30.74	16.25	2.92
1100	21.52	25.89	25.69	20.10	1.11	0.60	30.70	15.99	2.93
1200	21.30	25.79	25.28	19.84	1.12	0.59	30.55	15.68	2.97
1300	21.05	25.79	24.48	19.66	1.13	0.57	30.54	15.74	2.97
1400	20.86	25.69	23.64	19.43	1.14	0.57	30.19	15.78	3.03
1500	20.64	25.65	22.76	19.38	1.15	0.55	30.78	15.75	3.05
1600	20.40	25.61	22.09	19.28	1.16	0.54	30.81	15.74	3.04
1700	20.20	25.55	21.45	19.24	1.17	0.53	31.98	15.74	2.94
1800	19.98	25.50	20.66	19.13	1.18	0.52	31.71	15.61	3.07
1900	19.76	25.36	20.00	19.06	1.18	0.51	31.10	15.79	2.98
2000	19.54	25.44	19.42	18.97	1.20	0.50	31.23	15.69	2.94
2100	19.32	25.36	18.94	19.10	1.21	0.49	31.24	15.71	3.07
2200	19.09	25.31	18.42	19.22	1.23	0.48	31.45	15.78	2.94
2300	18.91	25.26	17.69	19.21	1.24	0.47	31.25	15.91	3.02
2400	18.72	25.21	17.29	19.34	1.25	0.46	31.31	16.01	3.03
2500	18.53	25.13	16.72	19.32	1.25	0.45	31.04	15.95	2.96
2600	18.34	25.07	16.35	19.38	1.26	0.44	30.94	15.88	3.04
2700	18.16	25.04	15.91	19.52	1.27	0.44	30.77	15.83	3.05
2800	17.97	24.99	15.62	19.71	1.29	0.43	30.71	15.77	3.03
2900	17.83	24.96	15.09	19.81	1.29	0.42	30.80	15.67	3.03
3000	17.65	24.95	14.75	19.93	1.31	0.41	30.46	15.64	2.94
3100	17.48	24.86	14.58	20.12	1.31	0.41	30.34	15.52	3.11
3200	17.33	24.91	14.23	20.33	1.33	0.40	30.07	15.54	3.06
3300	17.20	24.80	13.80	20.43	1.33	0.40	30.00	15.41	3.18
3400	17.05	24.76	13.59	20.80	1.34	0.39	29.95	15.25	3.17
3500	16.90	24.79	13.37	21.09	1.36	0.38	29.70	15.02	3.16
3600	16.79	24.70	13.16	21.11	1.36	0.38	29.31	14.94	3.31
3700	16.65	24.67	13.01	21.60	1.37	0.38	29.27	14.70	3.17
3800	16.53	24.66	12.87	21.79	1.38	0.37	28.89	14.65	3.39
4000	16.33	24.61	12.48	22.62	1.39	0.37	28.24	14.02	3.29

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

Definitions:
Input Return Loss = -S11 (dB)
Gain(Power Gain) = S21 (dB)
Reverse Isolation = -S12 (dB)
Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 40mA, Vd = 4.45V @Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	22.87	26.01	24.17	39.61	1.06	0.70	27.31	13.70	2.75
100	22.86	26.03	23.86	39.34	1.06	0.69	26.96	13.80	2.90
200	22.77	25.86	23.68	33.66	1.06	0.70	27.35	13.64	2.83
300	22.61	25.70	23.56	30.51	1.06	0.70	27.12	13.51	2.96
400	22.48	25.79	23.62	27.54	1.07	0.68	27.02	13.67	2.91
500	22.31	25.63	23.80	26.09	1.07	0.68	26.78	13.80	2.86
600	22.18	25.62	24.32	24.88	1.07	0.67	26.86	13.66	2.84
700	22.00	25.66	23.54	24.05	1.08	0.65	27.23	13.68	2.85
800	21.79	25.54	23.47	23.22	1.08	0.65	27.24	13.71	2.93
900	21.64	25.60	23.05	22.65	1.09	0.63	27.48	13.84	2.85
1000	21.42	25.52	22.75	22.21	1.10	0.62	27.56	13.70	2.87
1100	21.24	25.52	22.03	21.69	1.11	0.60	27.47	13.42	2.87
1200	20.99	25.46	21.70	21.34	1.12	0.59	27.43	13.20	2.95
1300	20.77	25.39	21.35	20.86	1.12	0.58	27.45	13.17	2.87
1400	20.56	25.33	20.85	20.54	1.13	0.57	27.22	13.20	2.98
1500	20.37	25.31	20.37	20.29	1.14	0.56	27.74	13.27	2.98
1600	20.13	25.31	19.71	20.16	1.15	0.54	27.82	13.32	2.97
1700	19.92	25.22	19.30	20.00	1.16	0.53	28.69	13.33	2.85
1800	19.73	25.18	18.78	19.79	1.17	0.52	28.58	13.18	3.01
1900	19.51	25.20	18.17	19.73	1.19	0.51	28.17	13.29	2.93
2000	19.32	25.17	17.64	19.55	1.19	0.50	28.33	13.28	2.86
2100	19.07	25.08	17.22	19.64	1.20	0.49	28.38	13.35	2.99
2200	18.87	25.04	16.85	19.67	1.22	0.48	28.64	13.56	2.87
2300	18.66	24.97	16.31	19.52	1.22	0.47	28.67	13.62	2.97
2400	18.49	24.90	15.99	19.66	1.23	0.46	28.83	13.62	2.91
2500	18.31	24.99	15.47	19.55	1.25	0.45	28.58	13.84	2.91
2600	18.13	24.89	15.10	19.56	1.25	0.44	28.56	13.81	2.94
2700	17.93	24.82	14.73	19.66	1.26	0.43	28.44	13.76	2.96
2800	17.75	24.84	14.48	19.75	1.28	0.42	28.41	13.63	2.92
2900	17.60	24.77	14.09	19.76	1.29	0.42	28.42	13.61	2.97
3000	17.45	24.70	13.83	19.86	1.29	0.41	28.27	13.66	2.89
3100	17.27	24.73	13.55	20.03	1.31	0.40	28.24	13.74	3.09
3200	17.11	24.68	13.31	20.13	1.32	0.40	28.27	13.81	3.02
3300	17.00	24.67	13.00	20.19	1.32	0.39	28.34	13.86	3.12
3400	16.84	24.63	12.82	20.46	1.34	0.39	28.22	13.72	3.08
3500	16.71	24.64	12.57	20.66	1.35	0.38	28.15	13.54	3.07
3600	16.59	24.56	12.32	20.63	1.35	0.38	27.75	13.55	3.19
3700	16.44	24.58	12.19	21.09	1.37	0.37	27.55	13.39	3.09
3800	16.32	24.55	12.12	21.35	1.38	0.37	27.30	13.36	3.31
4000	16.14	24.53	11.75	21.94	1.39	0.36	27.00	12.88	3.15

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

Definitions:
Input Return Loss = -S11 (dB)
Gain(Power Gain) = S21 (dB)
Reverse Isolation = -S12 (dB)
Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 60mA, Vd = 4.53V @Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	23.48	26.05	44.00	22.32	1.04	0.74	32.91	18.03	2.86
100	23.47	26.28	41.86	22.53	1.05	0.72	32.55	18.01	3.05
200	23.36	26.34	41.33	22.04	1.05	0.71	33.08	17.92	2.88
300	23.24	26.47	35.81	21.55	1.06	0.69	32.73	17.92	3.12
400	23.08	26.41	34.57	20.98	1.07	0.68	32.60	18.00	2.98
500	22.92	26.44	34.40	20.52	1.08	0.67	32.27	17.93	3.03
600	22.73	26.29	33.48	20.17	1.08	0.66	32.36	17.74	2.90
700	22.54	26.22	32.45	19.86	1.08	0.65	32.74	17.73	3.02
800	22.35	26.20	31.53	19.54	1.09	0.64	32.81	17.77	2.99
900	22.14	26.16	30.39	19.36	1.10	0.63	33.00	17.78	3.00
1000	21.92	26.12	29.71	19.16	1.11	0.61	33.19	17.77	2.95
1100	21.72	26.02	28.42	18.89	1.11	0.61	32.97	17.59	3.00
1200	21.48	26.06	27.83	18.78	1.13	0.59	32.80	17.45	3.01
1300	21.26	25.98	26.83	18.63	1.13	0.58	32.76	17.55	3.02
1400	21.04	25.85	25.71	18.52	1.14	0.57	32.28	17.49	3.09
1500	20.81	25.85	24.70	18.47	1.15	0.55	32.85	17.43	3.10
1600	20.58	25.83	23.89	18.39	1.17	0.54	32.89	17.47	3.10
1700	20.36	25.75	23.13	18.49	1.17	0.53	34.29	17.44	2.98
1800	20.13	25.67	22.26	18.41	1.18	0.52	33.98	17.32	3.12
1900	19.90	25.61	21.42	18.48	1.20	0.51	33.20	17.41	3.05
2000	19.71	25.57	20.78	18.34	1.20	0.50	33.16	17.39	3.01
2100	19.48	25.52	20.15	18.53	1.22	0.49	32.87	17.34	3.13
2200	19.27	25.45	19.63	18.63	1.23	0.48	32.84	17.33	3.01
2300	19.05	25.42	18.73	18.68	1.24	0.47	32.63	17.29	3.08
2400	18.86	25.36	18.29	18.90	1.25	0.46	32.76	17.27	3.07
2500	18.67	25.27	17.65	18.93	1.26	0.45	32.38	17.02	3.00
2600	18.49	25.25	17.28	19.01	1.27	0.44	32.24	17.02	3.13
2700	18.31	25.20	16.77	19.21	1.28	0.44	31.99	16.92	3.08
2800	18.12	25.11	16.46	19.34	1.29	0.43	31.89	16.76	3.09
2900	17.96	25.08	15.84	19.52	1.30	0.42	31.66	16.66	3.10
3000	17.80	25.02	15.51	19.67	1.30	0.42	31.66	16.58	3.05
3100	17.63	24.99	15.30	19.90	1.32	0.41	31.23	16.34	3.17
3200	17.48	24.97	14.87	20.14	1.33	0.40	31.00	16.30	3.14
3300	17.34	24.93	14.49	20.30	1.33	0.40	30.82	16.15	3.23
3400	17.18	24.87	14.26	20.65	1.34	0.40	30.55	16.02	3.24
3500	17.03	24.86	14.03	20.96	1.36	0.39	30.48	15.79	3.23
3600	16.94	24.75	13.73	21.01	1.35	0.39	30.13	15.67	3.38
3700	16.80	24.78	13.58	21.49	1.37	0.38	30.07	15.44	3.23
3800	16.68	24.74	13.40	21.70	1.38	0.38	29.62	15.27	3.47
4000	16.48	24.68	13.03	22.53	1.39	0.37	28.94	14.68	3.36

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

Definitions:
Input Return Loss = -S11 (dB)
Gain(Power Gain) = S21 (dB)
Reverse Isolation = -S12 (dB)
Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 50mA, Vd = 4.73V @Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	23.31	26.03	30.24	26.10	1.05	0.73	31.03	16.42	2.54
100	23.32	26.44	27.92	27.87	1.06	0.70	30.61	16.41	2.67
200	23.21	26.12	27.23	27.60	1.05	0.71	31.04	16.23	2.51
300	23.10	26.18	29.34	24.48	1.06	0.70	30.95	16.29	2.61
400	22.96	26.17	29.62	23.21	1.06	0.69	30.95	16.43	2.56
500	22.83	26.09	29.05	22.51	1.06	0.68	30.70	16.43	2.53
600	22.63	26.08	29.60	21.72	1.07	0.67	30.76	16.33	2.48
700	22.46	26.04	29.17	21.03	1.08	0.66	31.20	16.32	2.55
800	22.29	26.01	28.06	20.81	1.08	0.65	31.26	16.33	2.56
900	22.09	25.91	26.98	20.67	1.09	0.64	31.49	16.33	2.50
1000	21.87	25.87	26.74	20.33	1.09	0.63	31.61	16.26	2.51
1100	21.67	25.83	25.88	20.19	1.10	0.61	31.58	15.94	2.49
1200	21.47	25.80	25.84	19.74	1.11	0.60	31.56	15.74	2.55
1300	21.24	25.73	25.18	19.44	1.12	0.59	31.47	15.83	2.54
1400	21.04	25.67	24.53	19.08	1.13	0.58	31.26	15.86	2.60
1500	20.81	25.62	23.85	18.89	1.14	0.57	31.89	15.78	2.62
1600	20.60	25.56	22.88	18.95	1.14	0.56	31.86	15.80	2.58
1700	20.39	25.56	22.23	18.92	1.16	0.54	33.01	15.86	2.48
1800	20.16	25.46	21.49	18.79	1.16	0.53	32.97	15.73	2.61
1900	19.95	25.45	20.87	18.79	1.18	0.52	32.42	15.85	2.53
2000	19.74	25.33	20.06	18.77	1.18	0.52	32.53	15.80	2.49
2100	19.53	25.30	19.68	18.71	1.19	0.50	32.55	15.79	2.58
2200	19.31	25.31	19.18	18.56	1.21	0.49	32.74	15.99	2.49
2300	19.13	25.25	18.48	18.48	1.22	0.48	32.77	16.13	2.55
2400	18.93	25.17	18.18	18.53	1.23	0.47	32.79	16.25	2.52
2500	18.74	25.14	17.66	18.46	1.24	0.46	32.61	16.23	2.48
2600	18.56	25.06	17.22	18.59	1.24	0.46	32.58	16.16	2.56
2700	18.39	24.96	16.80	18.77	1.25	0.45	32.29	16.16	2.55
2800	18.20	25.06	16.48	18.81	1.27	0.44	32.39	16.05	2.51
2900	18.07	24.97	15.85	18.92	1.27	0.43	32.26	16.00	2.54
3000	17.89	24.86	15.48	19.20	1.28	0.43	32.20	15.99	2.46
3100	17.74	24.84	15.22	19.44	1.29	0.42	32.07	16.00	2.61
3200	17.58	24.80	14.89	19.70	1.30	0.42	31.81	16.03	2.66
3300	17.47	24.78	14.51	19.88	1.30	0.41	31.93	16.02	2.65
3400	17.30	24.73	14.33	20.07	1.31	0.41	31.65	15.90	2.65
3500	17.17	24.67	14.11	20.14	1.32	0.40	31.71	15.72	2.64
3600	17.06	24.66	13.80	20.24	1.33	0.40	31.29	15.72	2.73
3700	16.93	24.64	13.58	20.64	1.34	0.39	30.94	15.43	2.65
3800	16.82	24.57	13.37	20.91	1.34	0.39	30.77	15.43	2.82
4000	16.62	24.57	13.01	21.57	1.36	0.38	30.13	14.80	2.72

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

Definitions:
Input Return Loss = -S11 (dB)
Gain(Power Gain) = S21 (dB)
Reverse Isolation = -S12 (dB)
Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 40mA, Vd = 4.69V @Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	22.96	25.80	23.53	37.59	1.05	0.72	27.60	13.68	2.45
100	22.98	25.77	23.26	39.22	1.05	0.72	27.22	13.71	2.62
200	22.89	25.95	22.84	36.33	1.06	0.70	27.53	13.56	2.48
300	22.79	25.94	23.77	29.68	1.06	0.69	27.51	13.58	2.58
400	22.65	25.78	24.39	26.94	1.06	0.70	27.49	13.85	2.56
500	22.50	25.84	23.96	25.71	1.07	0.68	27.28	13.70	2.49
600	22.32	25.75	24.87	24.39	1.07	0.67	27.37	13.62	2.48
700	22.18	25.66	24.59	23.31	1.07	0.67	27.79	13.63	2.49
800	21.99	25.69	23.87	22.81	1.08	0.65	27.76	13.80	2.55
900	21.79	25.63	23.49	22.47	1.09	0.64	28.00	13.74	2.45
1000	21.61	25.57	23.17	21.93	1.09	0.63	28.10	13.66	2.47
1100	21.43	25.54	22.68	21.66	1.10	0.62	28.03	13.34	2.44
1200	21.21	25.55	22.48	21.05	1.11	0.60	28.02	13.46	2.55
1300	20.99	25.45	22.23	20.57	1.12	0.59	28.06	13.20	2.46
1400	20.79	25.40	21.65	20.10	1.12	0.58	27.94	13.20	2.57
1500	20.57	25.36	21.37	19.81	1.13	0.57	28.44	13.21	2.57
1600	20.35	25.32	20.60	19.82	1.14	0.56	28.49	13.10	2.54
1700	20.16	25.27	20.08	19.78	1.15	0.55	29.26	13.24	2.43
1800	19.94	25.23	19.66	19.55	1.16	0.53	29.18	13.19	2.57
1900	19.73	25.15	19.05	19.51	1.17	0.52	28.90	13.26	2.49
2000	19.54	25.12	18.49	19.44	1.18	0.51	29.07	13.26	2.43
2100	19.33	25.08	18.04	19.36	1.19	0.50	29.19	13.20	2.54
2200	19.10	25.05	17.70	19.18	1.20	0.49	29.40	13.51	2.42
2300	18.91	25.02	17.06	18.96	1.21	0.48	29.55	13.71	2.51
2400	18.72	24.90	16.92	18.97	1.21	0.47	29.83	13.88	2.45
2500	18.54	24.92	16.39	18.76	1.23	0.46	29.64	13.81	2.45
2600	18.38	24.92	16.12	18.89	1.24	0.45	29.64	13.85	2.48
2700	18.20	24.80	15.62	18.99	1.24	0.45	29.51	13.70	2.52
2800	18.02	24.81	15.39	18.97	1.26	0.44	29.39	13.73	2.47
2900	17.87	24.77	14.80	19.01	1.26	0.43	29.50	13.72	2.51
3000	17.70	24.64	14.55	19.22	1.26	0.43	29.49	13.73	2.41
3100	17.56	24.62	14.32	19.44	1.27	0.42	29.53	13.83	2.57
3200	17.40	24.63	13.97	19.66	1.29	0.41	29.50	13.98	2.58
3300	17.27	24.63	13.73	19.83	1.30	0.41	29.76	14.12	2.60
3400	17.12	24.58	13.51	20.03	1.31	0.40	29.78	13.95	2.60
3500	16.99	24.57	13.34	20.04	1.32	0.40	29.51	13.81	2.61
3600	16.88	24.51	13.01	20.09	1.32	0.40	29.28	13.91	2.70
3700	16.75	24.50	12.84	20.50	1.33	0.39	29.10	13.81	2.62
3800	16.62	24.42	12.63	20.75	1.33	0.39	28.64	13.76	2.77
4000	16.45	24.43	12.36	21.38	1.35	0.38	28.24	13.39	2.66

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

Definitions:
Input Return Loss = -S11 (dB)
Gain(Power Gain) = S21 (dB)
Reverse Isolation = -S12 (dB)
Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 60mA, Vd = 4.77V @Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	23.53	26.63	36.03	23.04	1.06	0.70	33.66	18.23	2.53
100	23.54	26.21	32.41	24.07	1.04	0.73	33.26	18.20	2.71
200	23.42	26.47	31.61	23.76	1.06	0.70	33.76	18.05	2.53
300	23.31	26.41	35.08	21.81	1.06	0.70	33.60	18.14	2.68
400	23.17	26.39	34.87	20.96	1.06	0.69	33.52	18.23	2.60
500	23.02	26.34	34.02	20.69	1.07	0.68	33.33	18.15	2.60
600	22.82	26.30	33.02	19.98	1.07	0.67	33.38	18.00	2.51
700	22.65	26.25	32.65	19.56	1.08	0.66	33.79	18.06	2.59
800	22.48	26.13	31.65	19.56	1.08	0.66	33.91	18.06	2.60
900	22.26	26.13	29.74	19.34	1.09	0.64	34.22	18.08	2.54
1000	22.06	26.03	29.54	19.22	1.09	0.63	34.39	17.99	2.53
1100	21.85	26.00	28.39	19.01	1.10	0.62	34.33	17.82	2.55
1200	21.63	26.03	28.45	18.76	1.12	0.60	34.16	17.65	2.58
1300	21.40	25.98	27.62	18.50	1.12	0.59	34.17	17.81	2.56
1400	21.20	25.89	26.86	18.29	1.13	0.58	33.82	17.71	2.62
1500	20.97	25.81	25.70	18.11	1.14	0.57	34.41	17.68	2.65
1600	20.75	25.75	24.70	18.21	1.15	0.56	34.51	17.71	2.62
1700	20.54	25.68	24.02	18.31	1.16	0.55	35.90	17.68	2.52
1800	20.30	25.67	22.92	18.15	1.17	0.53	35.90	17.57	2.64
1900	20.09	25.63	22.19	18.19	1.18	0.52	35.14	17.65	2.58
2000	19.89	25.54	21.22	18.15	1.19	0.51	35.14	17.60	2.54
2100	19.68	25.49	20.91	18.14	1.20	0.50	35.06	17.59	2.64
2200	19.45	25.44	20.35	18.05	1.21	0.49	35.21	17.68	2.51
2300	19.26	25.39	19.59	18.03	1.22	0.48	34.93	17.56	2.58
2400	19.06	25.36	19.16	18.07	1.23	0.47	35.01	17.79	2.57
2500	18.88	25.20	18.56	18.11	1.23	0.47	34.54	17.63	2.53
2600	18.69	25.17	18.11	18.23	1.24	0.46	34.47	17.67	2.58
2700	18.52	25.17	17.69	18.44	1.26	0.45	34.17	17.51	2.60
2800	18.33	25.11	17.35	18.49	1.27	0.44	33.98	17.38	2.59
2900	18.21	24.98	16.68	18.70	1.27	0.44	33.84	17.31	2.59
3000	18.03	24.97	16.15	18.98	1.28	0.43	33.62	17.21	2.52
3100	17.86	24.94	15.99	19.23	1.29	0.43	33.47	17.08	2.63
3200	17.72	24.94	15.60	19.48	1.30	0.42	32.94	17.05	2.67
3300	17.59	24.80	15.20	19.70	1.30	0.42	32.83	16.85	2.69
3400	17.43	24.78	14.92	19.88	1.31	0.41	33.01	16.75	2.70
3500	17.30	24.78	14.68	19.92	1.32	0.40	32.75	16.56	2.69
3600	17.19	24.69	14.35	20.04	1.32	0.40	32.40	16.54	2.78
3700	17.06	24.75	14.17	20.48	1.34	0.39	32.29	16.27	2.72
3800	16.95	24.67	13.95	20.77	1.35	0.39	31.77	16.22	2.90
4000	16.74	24.60	13.49	21.39	1.36	0.39	31.04	15.61	2.78

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

Definitions:
Input Return Loss = -S11 (dB)
Gain(Power Gain) = S21 (dB)
Reverse Isolation = -S12 (dB)
Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 50mA, Vd = 4.31V @Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	23.05	26.53	30.43	27.40	1.08	0.67	30.15	16.38	3.14
100	23.05	26.30	30.84	26.82	1.07	0.69	29.84	16.44	3.35
200	22.95	26.16	32.57	24.71	1.06	0.69	30.38	16.29	3.19
300	22.82	26.10	29.29	24.55	1.07	0.68	29.99	16.27	3.38
400	22.68	26.04	27.87	24.35	1.07	0.68	29.78	16.32	3.32
500	22.49	25.90	27.45	23.74	1.07	0.67	29.50	16.30	3.34
600	22.31	25.90	27.88	23.04	1.08	0.66	29.51	16.23	3.28
700	22.13	25.94	26.76	22.45	1.09	0.64	29.84	16.16	3.33
800	21.94	25.82	25.62	22.25	1.09	0.64	29.77	16.14	3.34
900	21.74	25.82	25.20	21.94	1.10	0.62	30.05	16.19	3.34
1000	21.51	25.72	24.89	21.50	1.11	0.61	30.09	16.13	3.30
1100	21.32	25.70	24.00	21.14	1.11	0.60	29.99	15.86	3.35
1200	21.09	25.70	23.44	20.92	1.13	0.58	29.82	15.58	3.40
1300	20.87	25.65	22.83	20.64	1.14	0.57	29.81	15.66	3.34
1400	20.63	25.59	22.12	20.37	1.15	0.56	29.40	15.70	3.44
1500	20.41	25.49	21.62	20.23	1.15	0.55	29.94	15.66	3.47
1600	20.19	25.52	20.84	20.03	1.17	0.53	30.01	15.65	3.45
1700	19.96	25.49	20.31	19.89	1.18	0.52	31.22	15.72	3.33
1800	19.73	25.37	19.77	19.70	1.19	0.51	30.98	15.59	3.51
1900	19.50	25.28	19.14	19.62	1.20	0.50	30.29	15.72	3.42
2000	19.30	25.29	18.56	19.45	1.21	0.49	30.31	15.67	3.37
2100	19.08	25.28	18.01	19.60	1.23	0.48	30.28	15.58	3.52
2200	18.86	25.19	17.49	19.62	1.23	0.47	30.18	15.56	3.38
2300	18.64	25.16	16.79	19.63	1.25	0.46	29.99	15.64	3.47
2400	18.44	25.13	16.47	19.79	1.26	0.45	29.99	15.75	3.43
2500	18.24	25.05	15.88	19.78	1.27	0.44	29.69	15.51	3.38
2600	18.07	25.00	15.56	19.85	1.28	0.43	29.61	15.49	3.49
2700	17.87	24.99	15.11	19.94	1.29	0.42	29.37	15.34	3.47
2800	17.68	24.98	14.79	20.08	1.31	0.41	29.29	15.18	3.48
2900	17.52	24.86	14.29	20.17	1.31	0.41	29.38	15.11	3.51
3000	17.34	24.85	14.02	20.35	1.32	0.40	29.02	15.04	3.42
3100	17.18	24.80	13.72	20.62	1.33	0.40	28.78	14.86	3.59
3200	17.00	24.82	13.40	20.81	1.35	0.39	28.39	14.85	3.50
3300	16.86	24.73	13.04	20.97	1.35	0.39	28.33	14.78	3.65
3400	16.70	24.76	12.86	21.29	1.37	0.38	28.04	14.47	3.64
3500	16.56	24.74	12.67	21.61	1.38	0.37	27.98	14.23	3.62
3600	16.45	24.66	12.44	21.69	1.38	0.37	27.40	14.10	3.77
3700	16.30	24.60	12.28	22.19	1.39	0.37	27.32	13.86	3.64
3800	16.17	24.57	12.20	22.38	1.40	0.36	27.02	13.81	3.90
4000	15.97	24.55	11.99	23.26	1.42	0.36	26.47	13.19	3.76

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

Definitions:
Input Return Loss = -S11 (dB)
Gain(Power Gain) = S21 (dB)
Reverse Isolation = -S12 (dB)
Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 40mA, Vd = 4.27V @Temperature = +85degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	22.67	25.93	23.30	50.87	1.07	0.69	27.17	13.64	3.09
100	22.65	25.79	23.36	45.72	1.06	0.70	26.85	13.95	3.22
200	22.52	25.83	24.34	33.30	1.07	0.68	27.33	13.88	3.18
300	22.39	25.62	23.42	29.92	1.06	0.69	27.01	13.77	3.30
400	22.25	25.55	22.82	28.03	1.07	0.68	26.85	13.86	3.28
500	22.12	25.54	22.45	26.71	1.07	0.67	26.53	13.83	3.27
600	21.96	25.51	22.55	25.30	1.08	0.66	26.60	13.73	3.22
700	21.75	25.52	21.85	24.46	1.08	0.64	26.94	13.69	3.27
800	21.59	25.43	21.51	23.89	1.09	0.64	26.88	13.76	3.33
900	21.40	25.39	21.19	23.25	1.09	0.63	27.12	13.82	3.26
1000	21.18	25.39	20.93	22.79	1.10	0.61	27.20	13.71	3.29
1100	20.97	25.34	20.65	22.33	1.11	0.60	27.13	13.41	3.27
1200	20.75	25.36	20.38	21.95	1.12	0.58	27.03	13.07	3.35
1300	20.53	25.30	20.12	21.61	1.13	0.57	27.00	13.23	3.30
1400	20.34	25.21	19.45	21.20	1.14	0.56	26.76	13.26	3.41
1500	20.14	25.21	19.01	20.95	1.15	0.55	27.28	13.26	3.41
1600	19.89	25.17	18.70	20.78	1.16	0.53	27.32	13.27	3.43
1700	19.69	25.14	18.16	20.58	1.17	0.52	28.35	13.29	3.28
1800	19.47	25.07	17.70	20.29	1.18	0.51	28.17	13.21	3.46
1900	19.24	25.02	17.16	20.15	1.19	0.50	27.70	13.25	3.38
2000	19.03	24.95	16.87	19.90	1.20	0.49	27.83	13.28	3.31
2100	18.80	24.94	16.49	20.01	1.21	0.48	27.92	13.35	3.45
2200	18.59	24.86	16.09	20.02	1.22	0.47	28.05	13.51	3.30
2300	18.40	24.87	15.43	19.85	1.23	0.46	27.98	13.62	3.39
2400	18.21	24.83	15.11	19.98	1.24	0.45	28.13	13.81	3.40
2500	18.01	24.77	14.58	19.86	1.25	0.44	27.97	13.69	3.35
2600	17.81	24.80	14.40	19.85	1.27	0.43	27.78	13.65	3.42
2700	17.63	24.70	14.05	19.90	1.28	0.42	27.53	13.57	3.41
2800	17.43	24.71	13.82	20.00	1.29	0.41	27.58	13.44	3.43
2900	17.29	24.66	13.31	19.98	1.30	0.41	27.66	13.49	3.46
3000	17.13	24.60	13.00	20.07	1.30	0.40	27.46	13.44	3.33
3100	16.92	24.64	12.85	20.26	1.33	0.39	27.33	13.49	3.52
3200	16.79	24.65	12.54	20.32	1.34	0.38	27.23	13.57	3.39
3300	16.65	24.55	12.19	20.44	1.34	0.38	27.09	13.44	3.60
3400	16.50	24.56	12.01	20.64	1.35	0.38	26.97	13.28	3.56
3500	16.33	24.58	11.86	20.82	1.37	0.37	26.91	13.04	3.55
3600	16.22	24.52	11.69	20.82	1.38	0.37	26.57	12.98	3.69
3700	16.07	24.43	11.60	21.30	1.38	0.36	26.31	12.77	3.57
3800	15.97	24.47	11.49	21.52	1.40	0.36	26.04	12.75	3.80
4000	15.75	24.48	11.30	22.10	1.42	0.35	25.65	12.12	3.65

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Data

Definitions:
Input Return Loss = -S11 (dB)
Gain(Power Gain) = S21 (dB)
Reverse Isolation = -S12 (dB)
Output Return Loss = -S22 (dB)

TEST CONDITIONS: Icc = 60mA, Vd = 4.35V @Temperature = +85degC


FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Delta	(dBm)	(dBm)	(dB)
50	23.34	26.13	43.35	22.99	1.05	0.72	32.65	17.77	3.20
100	23.32	26.13	44.83	22.84	1.05	0.72	32.25	17.77	3.43
200	23.19	26.22	43.57	21.52	1.06	0.71	32.89	17.66	3.22
300	23.06	26.30	35.59	21.77	1.06	0.69	32.44	17.74	3.45
400	22.91	26.26	33.41	21.81	1.07	0.68	32.21	17.81	3.35
500	22.75	26.19	32.66	21.14	1.07	0.67	31.80	17.69	3.42
600	22.56	26.17	32.22	20.77	1.08	0.66	31.82	17.48	3.29
700	22.36	26.14	30.65	20.69	1.09	0.64	32.09	17.53	3.40
800	22.17	26.12	29.81	20.50	1.09	0.63	31.97	17.55	3.39
900	21.96	26.08	28.59	20.31	1.10	0.62	32.22	17.50	3.40
1000	21.74	26.02	28.04	20.15	1.11	0.61	32.22	17.45	3.34
1100	21.52	25.97	26.70	20.01	1.12	0.60	32.06	17.34	3.38
1200	21.28	25.93	26.02	19.83	1.13	0.58	31.83	17.16	3.44
1300	21.04	25.89	25.37	19.64	1.14	0.57	31.66	17.24	3.44
1400	20.83	25.78	24.44	19.44	1.15	0.56	31.22	17.18	3.52
1500	20.61	25.81	23.55	19.23	1.16	0.54	31.62	17.11	3.55
1600	20.36	25.72	22.67	19.22	1.17	0.53	31.76	17.16	3.50
1700	20.14	25.64	22.06	19.12	1.18	0.52	33.12	17.13	3.40
1800	19.91	25.60	21.26	19.00	1.20	0.51	32.59	17.00	3.57
1900	19.68	25.56	20.44	18.98	1.21	0.50	31.74	17.01	3.50
2000	19.46	25.45	19.74	18.88	1.21	0.49	31.66	17.04	3.44
2100	19.23	25.42	19.16	19.06	1.23	0.48	31.41	16.88	3.59
2200	19.01	25.39	18.65	19.10	1.24	0.47	31.21	16.84	3.45
2300	18.80	25.33	17.88	19.15	1.25	0.46	30.90	16.72	3.52
2400	18.61	25.24	17.46	19.38	1.26	0.45	30.73	16.60	3.53
2500	18.40	25.09	16.75	19.43	1.26	0.45	30.46	16.43	3.45
2600	18.21	25.19	16.37	19.52	1.29	0.43	30.16	16.33	3.58
2700	18.02	25.12	15.88	19.66	1.30	0.43	30.11	16.19	3.54
2800	17.82	25.11	15.62	19.84	1.31	0.42	29.99	15.99	3.55
2900	17.68	24.95	15.04	20.00	1.31	0.42	29.86	15.90	3.57
3000	17.50	25.00	14.71	20.18	1.33	0.40	29.50	15.70	3.51
3100	17.31	24.93	14.41	20.51	1.34	0.40	29.16	15.55	3.65
3200	17.16	24.86	14.05	20.74	1.34	0.39	28.83	15.51	3.59
3300	17.02	24.83	13.70	20.96	1.35	0.39	28.74	15.32	3.71
3400	16.87	24.80	13.45	21.34	1.36	0.38	28.34	15.10	3.70
3500	16.69	24.84	13.23	21.65	1.39	0.37	28.22	14.88	3.71
3600	16.59	24.77	12.95	21.81	1.39	0.37	27.95	14.74	3.87
3700	16.43	24.71	12.86	22.31	1.40	0.37	27.64	14.47	3.70
3800	16.32	24.67	12.76	22.59	1.41	0.37	27.14	14.35	4.00
4000	16.11	24.68	12.45	23.42	1.43	0.36	26.68	13.75	3.85

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves


GAIN vs. TEMPERATURE

INPUT POWER = -25dBm,, CURRENT = 50mA

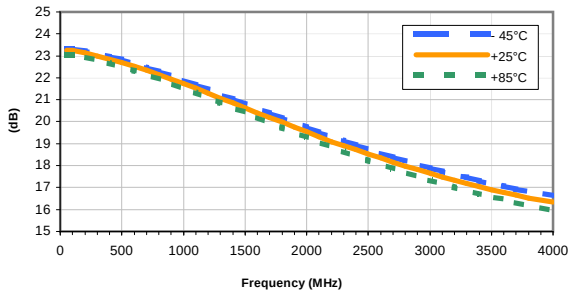


GAIN vs. CURRENT

INPUT POWER = -25dBm,, Temperature = +25°C

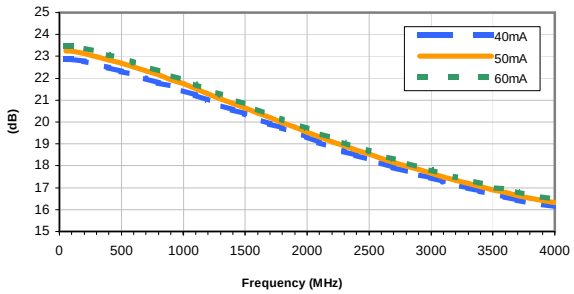


ISOLATION vs. TEMPERATURE

INPUT POWER = -25dBm,, CURRENT = 50mA

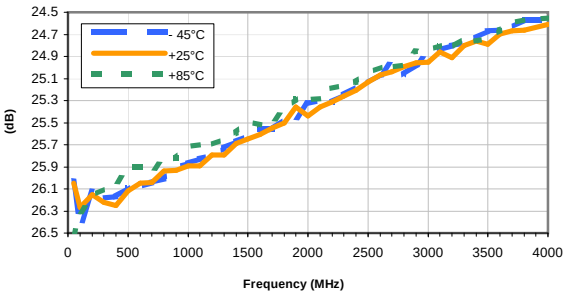


ISOLATION vs. CURRENT

INPUT POWER = -25dBm,, Temperature = +25°C

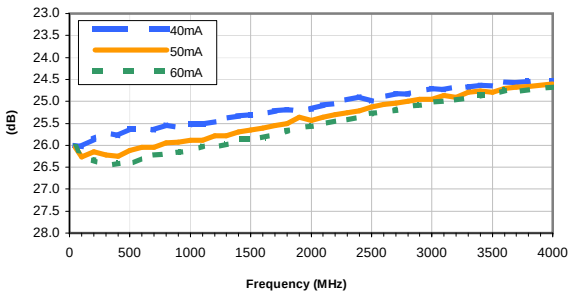


INPUT RETURN LOSS vs. TEMPERATURE

INPUT POWER = -25dBm,, CURRENT = 50mA

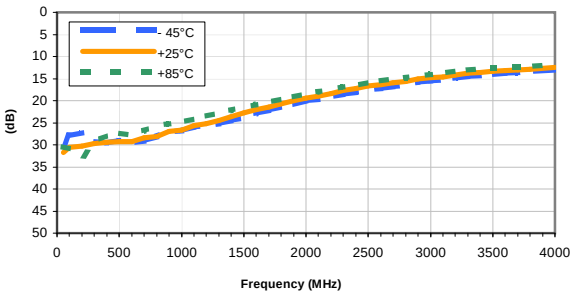


INPUT RETURN LOSS vs. CURRENT

INPUT POWER = -25dBm,, Temperature = +25°C

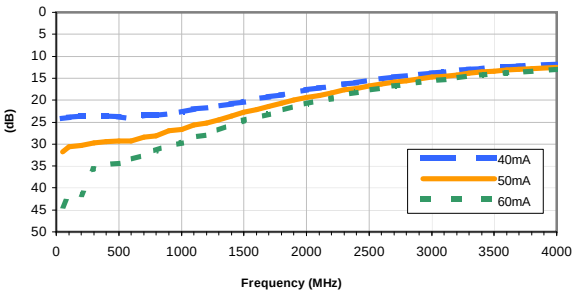


OUTPUT RETURN LOSS vs. TEMPERATURE

INPUT POWER = -25dBm,, CURRENT = 50mA

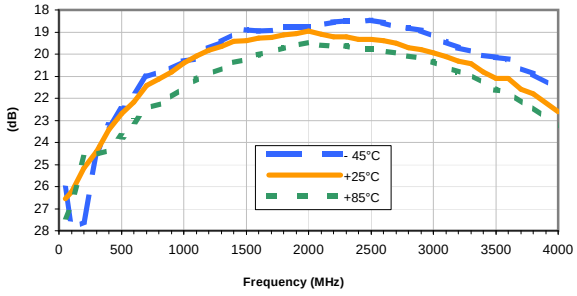

OUTPUT RETURN LOSS vs. CURRENT

INPUT POWER = -25dBm,, Temperature = +25°C

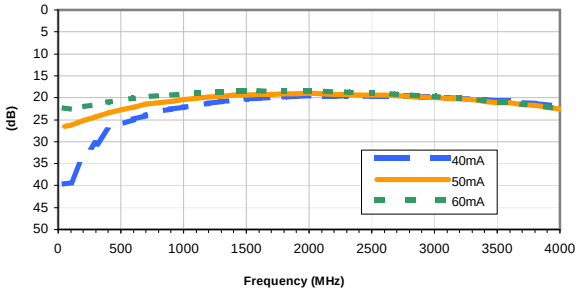


Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves


OUTPUT IP3 vs. TEMPERATURE

INPUT POWER = -25dBm,, CURRENT = 50mA

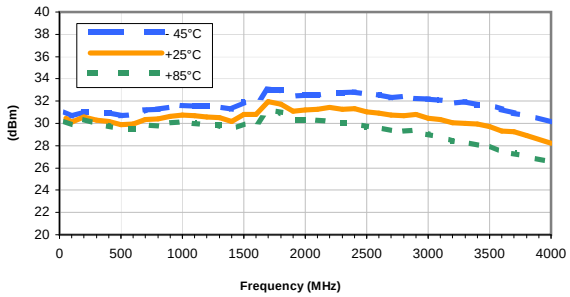


OUTPUT IP3 vs. CURRENT

INPUT POWER = -25dBm,, Temperature = +25°C

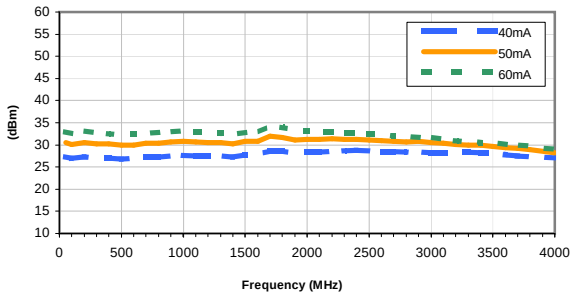


OUTPUT POWER at 1dB Compression vs. TEMPERATURE

CURRENT = 50mA

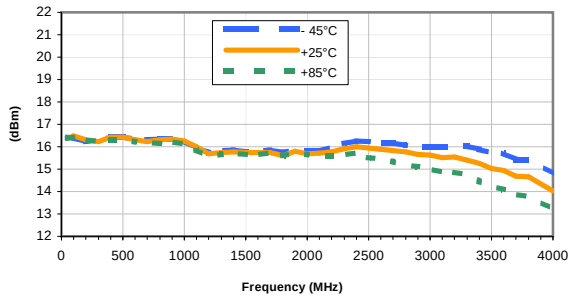


OUTPUT POWER at 1dB Compression vs. CURRENT

Temperature = +25°C

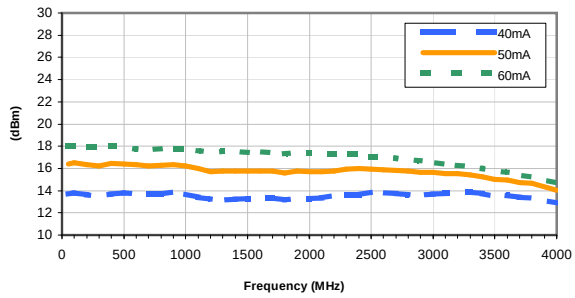


Noise Figure vs. TEMPERATURE

CURRENT = 50mA

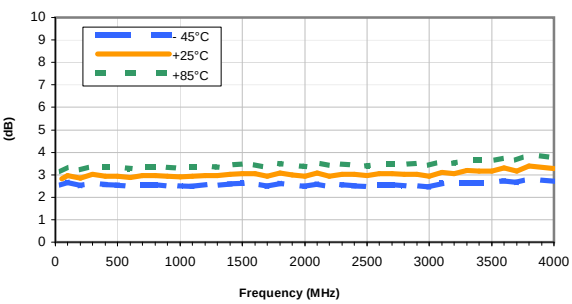

Noise Figure vs. CURRENT

Temperature = +25°C

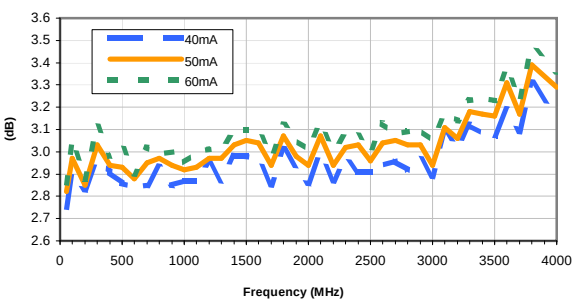


Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves


GAIN vs. TEMPERATURE

INPUT POWER = -25dBm,, CURRENT = 50mA

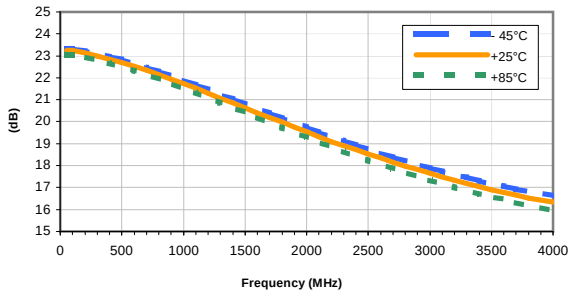


GAIN vs. CURRENT

INPUT POWER = -25dBm,, Temperature = +25°C

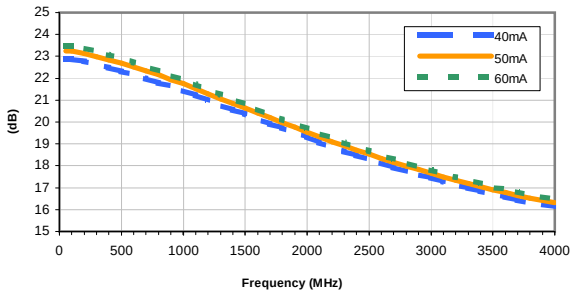


ISOLATION vs. TEMPERATURE

INPUT POWER = -25dBm,, CURRENT = 50mA

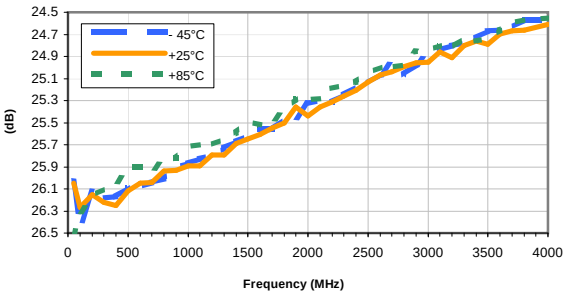


ISOLATION vs. CURRENT

INPUT POWER = -25dBm,, Temperature = +25°C

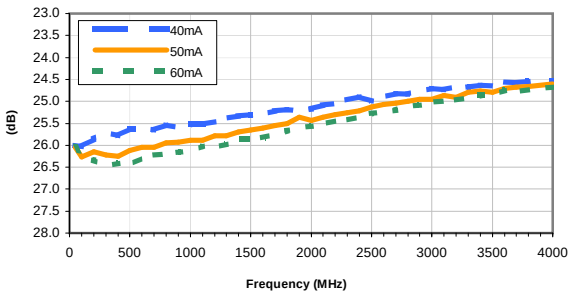


INPUT RETURN LOSS vs. TEMPERATURE

INPUT POWER = -25dBm,, CURRENT = 50mA

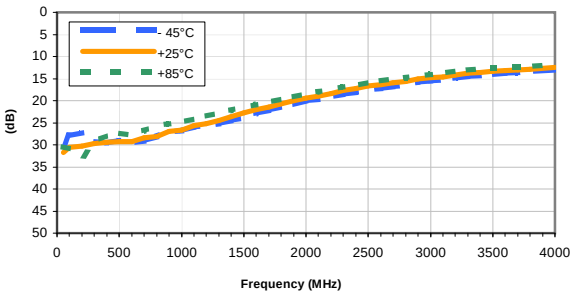


INPUT RETURN LOSS vs. CURRENT

INPUT POWER = -25dBm,, Temperature = +25°C

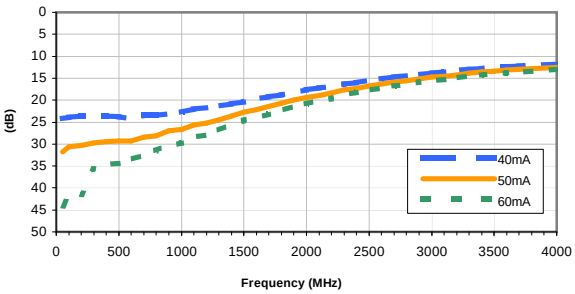


OUTPUT RETURN LOSS vs. TEMPERATURE

INPUT POWER = -25dBm,, CURRENT = 50mA

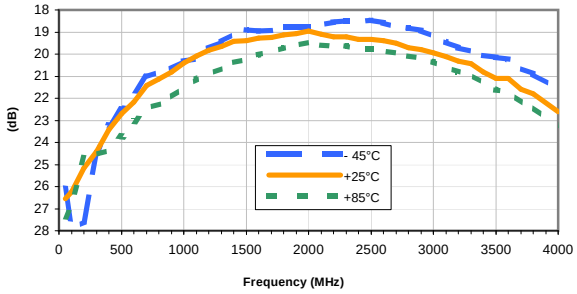

OUTPUT RETURN LOSS vs. CURRENT

INPUT POWER = -25dBm,, Temperature = +25°C

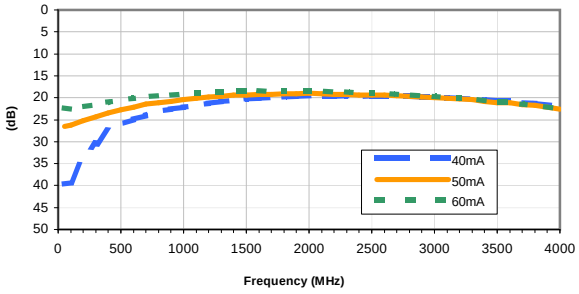


Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Typical Performance Curves


OUTPUT IP3 vs. TEMPERATURE

INPUT POWER = -25dBm,, CURRENT = 50mA

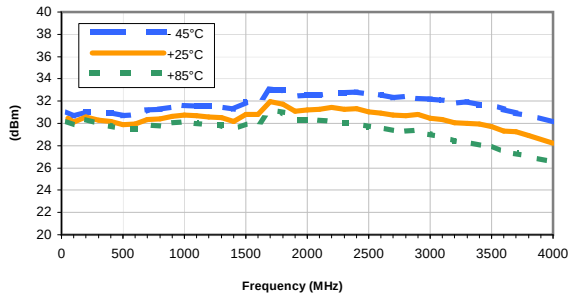


OUTPUT IP3 vs. CURRENT

INPUT POWER = -25dBm,, Temperature = +25°C

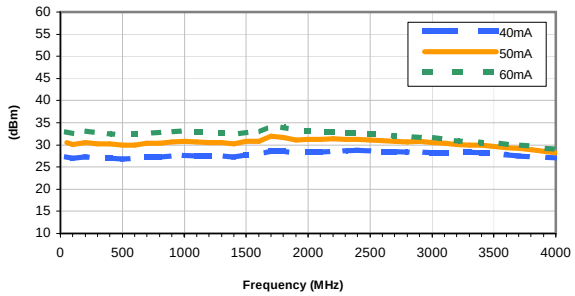


OUTPUT POWER at 1dB Compression vs. TEMPERATURE

CURRENT = 50mA

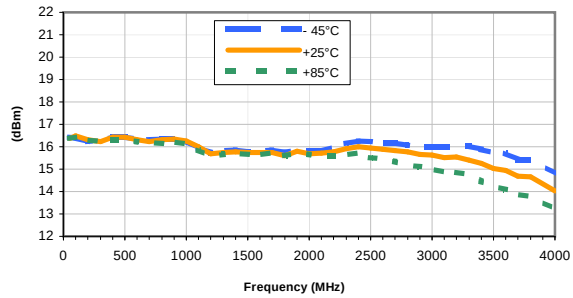


OUTPUT POWER at 1dB Compression vs. CURRENT

Temperature = +25°C

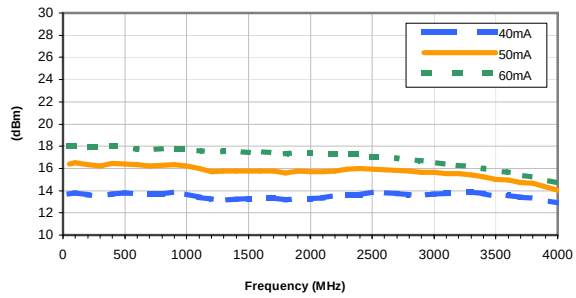


Noise Figure vs. TEMPERATURE

CURRENT = 50mA

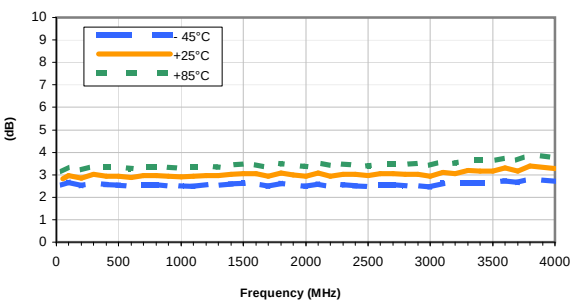

Noise Figure vs. CURRENT

Temperature = +25°C

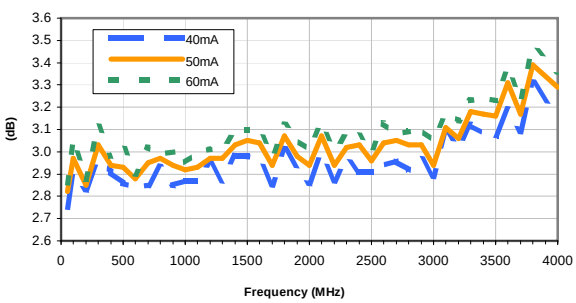


Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com


Case Style DF

DF782

Outline Dimensions

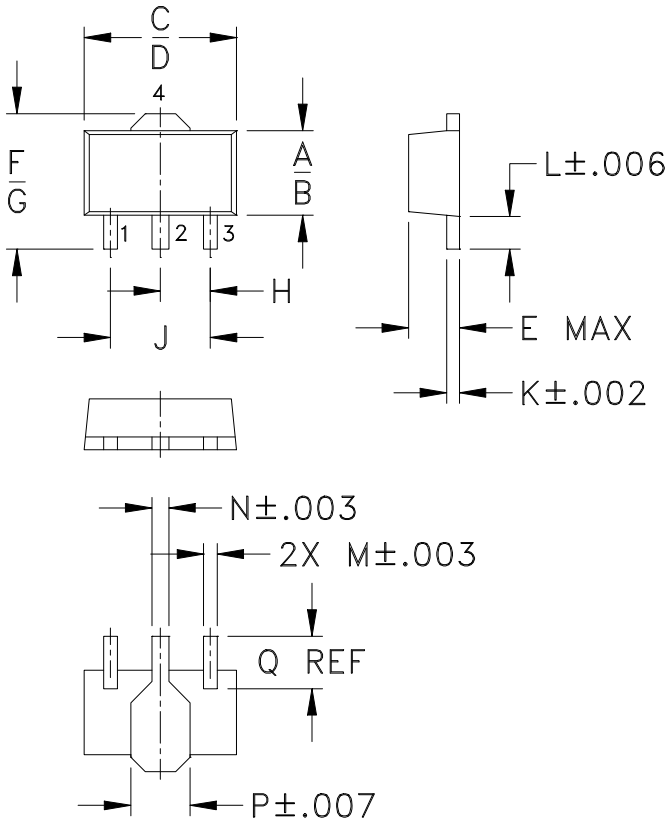

PCB Land Pattern

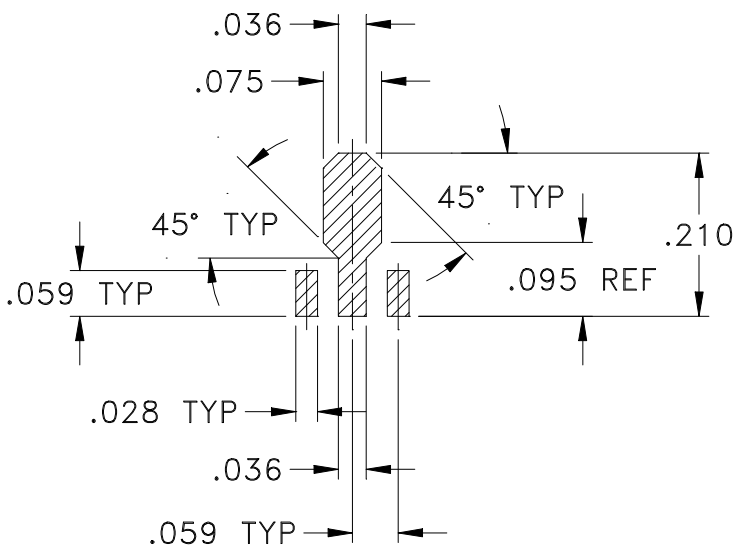

Suggested Layout,
Tolerance to be within ±.002

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
DF782	.102 (2.59)	.090 (2.29)	.181 (4.60)	.173 (4.39)	.063 (1.60)	.167 (4.24)	.155 (3.94)	.059 (1.50)	.118 (3.00)	.015 (0.38)	.041 (1.04)	.016 (0.41)

CASE #	N	P	Q	WT. GRAM
DF782	.019 (0.48)	.065 (1.65)	.062 (1.57)	.2

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3Pl. ± .005

Notes:


1. Case material: Plastic.
2. Termination finish:
   For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin.
   All models, (+) suffix. See model Data sheet.
   For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.

Tape & Reel Packaging TR-F55

DEVICE ORIENTATION IN T&R

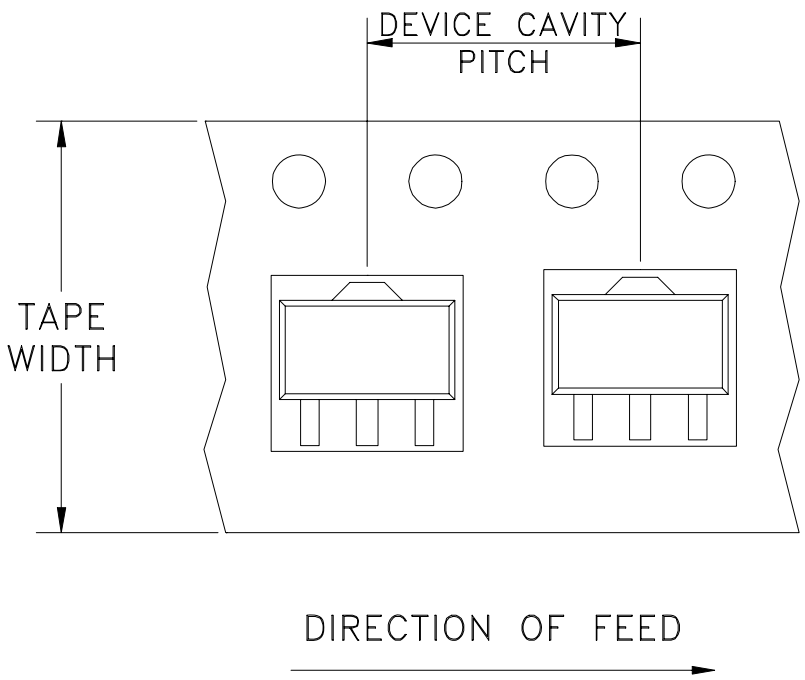

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
12	8	7	Small quantity standard (see note)	20
				50
				100
				200
				500
			Standard	1000

Note: Please consult individual model data sheet to determine device per reel availability.


Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits.


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M76190	CHANGED DISCRIPTION	04/01	GF	CT
B	M82575	UPDATED DRAWING	08/05/02	AV	LC
C	M102713	ADDED NOTE 2 & "...WITH SMOBC"	01/17/06	MMG	IL
D	M108434	UPDATED DRAWING PER TB-409+	11/14/06	PW	IG


SUGGESTED MOUNTING CONFIGURATION
FOR DF782 CASE STYLE, "mz" PIN CONNECTION

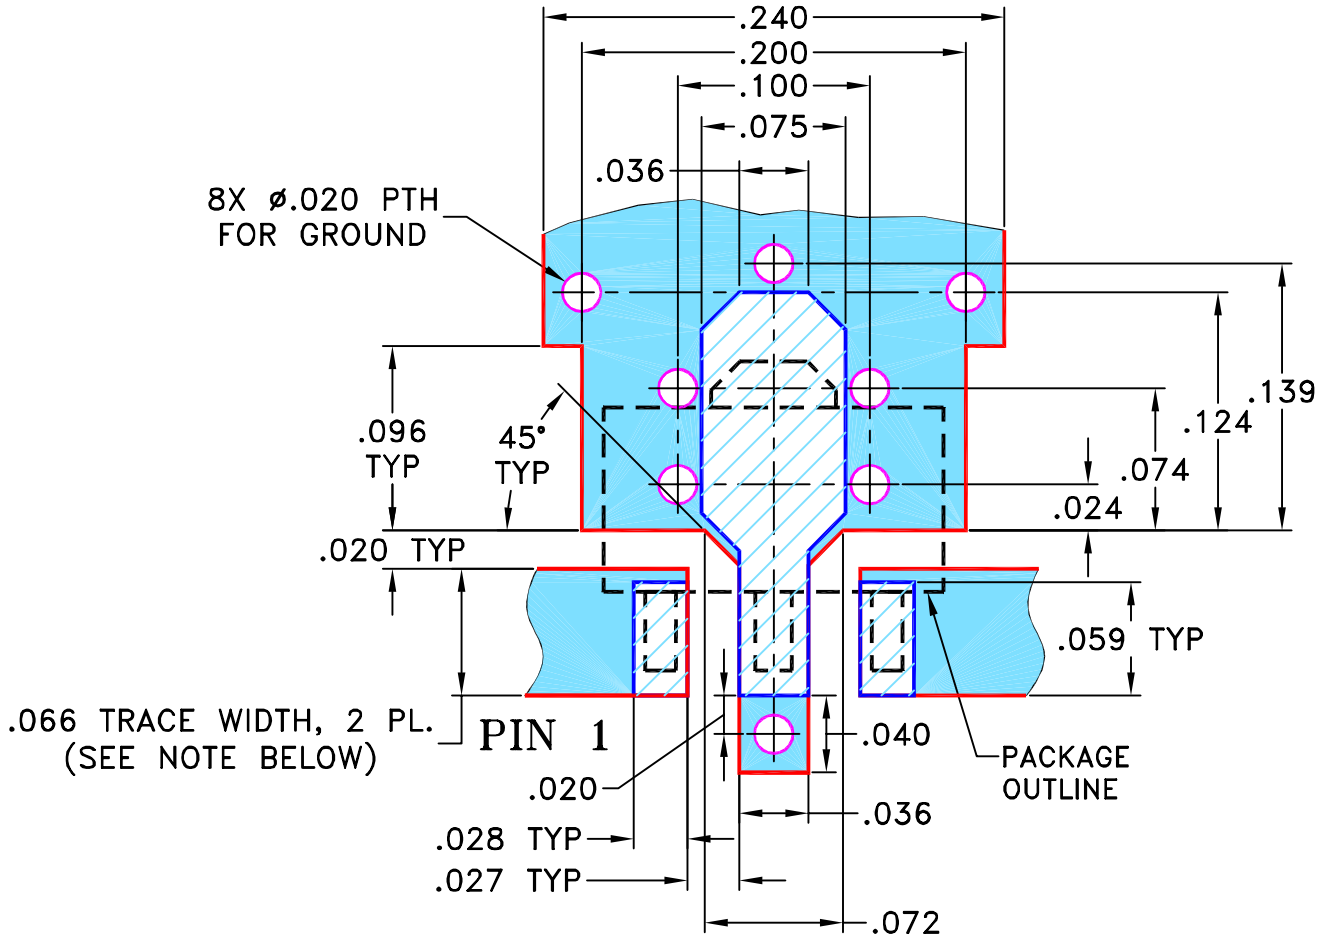

NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	AV	01/15/01
TOLERANCES ON:	CHECKED	YB	01/23/01
2 PL DECIMALS ±	APPROVED	DB	01/23/01
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95


Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL, mz, DF782, GALI, TB-409-XXX+


SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-019	D

FILE:	SCALE:	SHEET:
98PL019	10:1	1 OF 1

Evaluation Board and Circuit

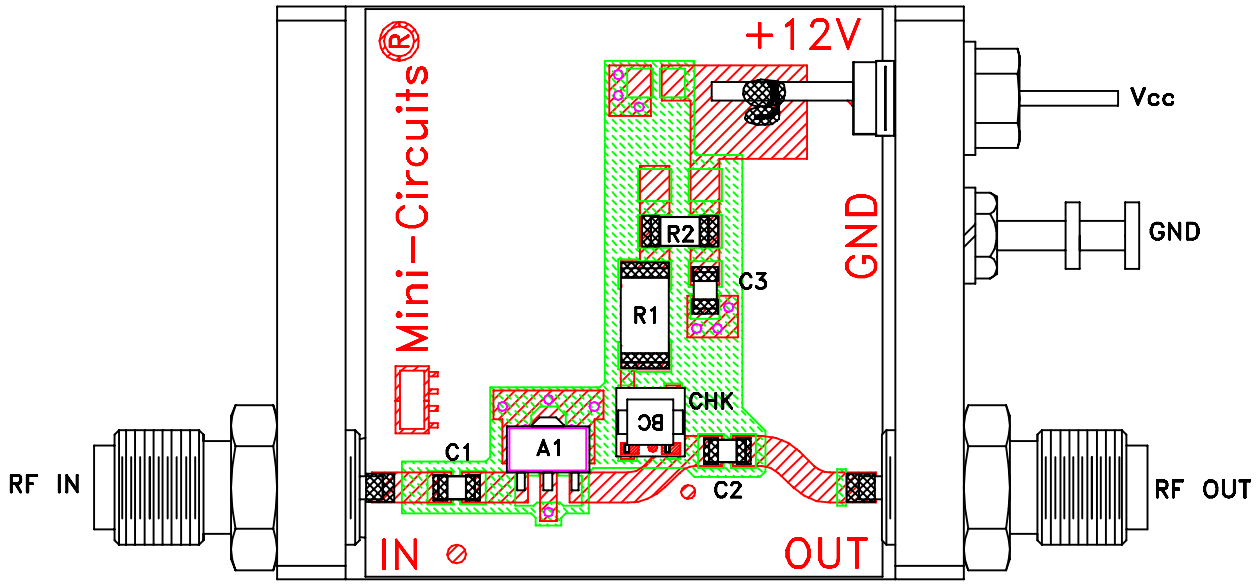

TB-409-55+

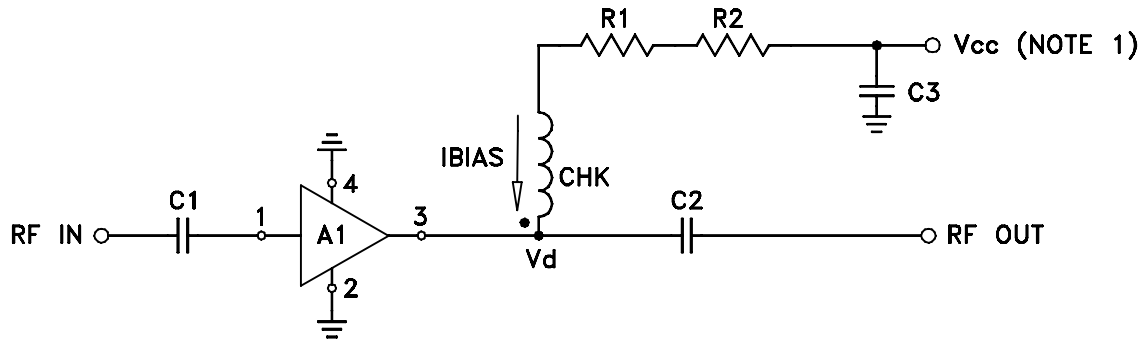

COMPONENT	VALUE
A1	Gali-55(+)
C1 (NOTE 4)	2400 pF
C2 (NOTE 4)	2400 pF
C3 (bypass)	0.1 uF
R1	154 Ohms, 0.75W
R2	0 Ohm, 0.25W
CHK	Mini-Circuits TCCH-80+

Schematic Diagram

NOTE:

1. Vcc voltage: +12±0.2V.
2. SMA Female connectors.
3. PCB material: Rogers RO4350 or equivalent, dielectric constant=3.5, dielectric thickness=.030 inch.
4. Capacitors, C1 & C2 should be free of resonance up to the highest frequency specified.

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.

Mini-Circuits

Environmental Specifications **ENV08T2**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-45° to 85°C or -40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-65° to 150° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Mechanical Shock	1.5Kg, 0.5 ms, 5 shock pulses, Y1 direction only	MIL-STD-883, Method 2002, Condition B, except Y1 direction only
Vibration (Variable Frequency)	50g peak	MIL-STD-883, Method 2007, Condition B
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102, Condition C
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 260°C peak	J-STD-020
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether +	MIL-STD-202, Method 215

This document and its contents are the property of Mini-Circuits.

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
	monoethanolamine at 63°C to 70°C	

This document and its contents are the property of Mini-Circuits.